


FIELD MONUMENT TUBB	OPERATOR ASHMUN & HILLIARD	DATE 4/29/76
LEASE J. W. Cooper	WELL NO. 1	LOCATION Unit F, Sec. 3, T-20-S, R-37-E

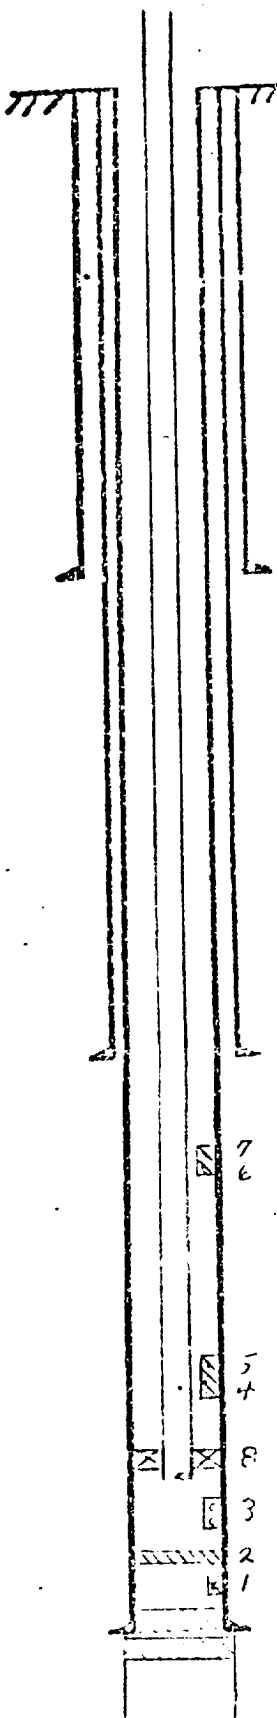

13-3/8" casing set at 254 ' with 300 sx of class 'C' cement
Hole size 17-1/2 ". Cement circulated to surface.

9-5/8 " casing set at 4000 ' with 500 sx of .50/50 pz. cement
Hole size 12-1/4 ". Top of cement @ 2500' by temperature survey.

7 Squeezed perfs 4200-4215' w/100 sx reg.
6 Perf 4200-4215'. Tested fresh water.

5 Squeezed perfs 5287-5292' w/75 sx reg.
4 Perf 5287-5292' (Glorietta). Tested water.

8 Tubing--2-3/8", 4.7#, J-55, EUE 8 Rd, set @ 6508'. Packer - Baker Model
"D" set @ 6500'.

3 Perf 6595-6613' (Tubb). Test oil & gas. Present completion.

2 Cement retainer @ 6700' - squeeze 60 sx below retainer.

1 Perf 6733-6786 (Drinkard). Tested water.

7 " casing set at 6820 ' with 400 sx of 4% gel cement

Total Depth 7957 ' Hole size 8-3/4 ". Calculated top of cem @ 4000'.

Open hole plug 50 sx cement 7800' to 7900'