

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

HOBBS OCD

FORM APPROVED
OMB NO. 1004-0135
Expires: July 31, 2010**SUNDRY NOTICES AND REPORTS ON WELLS**
Do not use this form for proposals to drill or to re-enter an abandoned well. Use form 3160-3 (APD) for such proposals.

APR 24 2013

SUBMIT IN TRIPLICATE - Other instructions on reverse side.

RECEIVED

5. Lease Serial No.
NMNM0557565
6. If Indian, Allottee or Tribe Name
7. If Unit or CA/Agreement, Name and/or No.
8. Well Name and No.
BEALL FEDERAL COM 1
9. API Well No.
30-005-20483-00-S1
10. Field and Pool, or Exploratory
SAND RANCH-ATOKA, SOUTH
11. County or Parish, and State
CHAVES COUNTY, NM

1. Type of Well
☐ Oil Well ☒ Gas Well ☐ Other
2. Name of Operator
THREE RIVERS OPERATING CO LLC
- Contact: DAVID A EYLER
E-Mail: DEYLER@MILAGRO-RES.COM
- 3a. Address
1122 S CAPITAL OF TX HWY STE 325
AUSTIN, TX 78746
- 3b. Phone No. (include area code)
Ph: 432-687-3033
4. Location of Well (Footage, Sec., T., R., M., or Survey Description)
Sec 17 T11S R30E SWNE 1980FNL 2230FEL

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION			
<input checked="" type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input type="checkbox"/> Other
	<input type="checkbox"/> Change Plans	<input checked="" type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon	
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	

13. Describe Proposed or Completed Operation (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recompleate horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompleation in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.)

- 1) SET 4-1/2" CIBP @ 9,050'; PUMP 25 SXS.CMT. @ 9,050'-8,860'; CIRC.WELL W/ MUD.
2) PUMP 25 SXS.CMT. @ 7,355'-7,185'(T/WC); WOC X TAG CMT. PLUG.
3) PERF. X ATTEMPT TO SQZ. 50 SXS.CMT. @ 3,970'-3,830'(T/GLOR.). -Tag
4) CUT X PULL 4-1/2" CSG. @ +/-2,850'.
5) PUMP 50 SXS.CMT. @ 2,910'-2,790'(4-1/2"CSG.CUT.8-5/8"CSG.SHOE); WOC X TAG.
6) PUMP 45 SXS.CMT. @ 2,640'-2,520'(T/S.A.); WOC X TAG CMT. PLUG.
7) PERF. X ATTEMPT TO SQZ. 110 SXS.CMT. @ 1,365'-1,255'(T/YATES). -Tag
8) PERF. X ATTEMPT TO SQZ. 100 SXS.CMT. @ 420'-320'(13-3/8"CSG.SHOE); WOC X TAG.
9) PERF. X CIRC. TO SURF. 60 SXS.CMT. @ 83'-3'-103'-31'
10) DIG OUT X CUT OFF WELLHEAD 3' B.G.L.; WELD ON STEEL PLATE TO CSGS. X INSTALL DRY HOLE MARKER.

RECEIVED
MAR 25 2013
NMOCD ARTESIA5-6-11
NMOCD - *Guadalupe Oper. Inc.*Accepted for record
NMOCD

14. I hereby certify that the foregoing is true and correct.

Electronic Submission #201882 verified by the BLM Well Information System
For THREE RIVERS OPERATING CO LLC, sent to the Roswell
Committed to AFMSS for processing by DAVID GLASS on 03/19/2013 (13DRG0544SE)

Name (Printed/Typed) DAVID A EYLER

Title AGENT

Signature (Electronic Submission)

Date 03/19/2013

THIS SPACE FOR FEDERAL OR STATE OFFICE USE

Approved By (BLM Approver Not Specified)

Title PETROLEUM ENGINEER

Date 03/19/2013

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Office Roswell

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212 make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations to any matter within its jurisdiction.

SEE ATTACHED FOR
CONDITIONS OF APPROVALAPPROVED FOR 3 MONTH PERIOD
ENDING JUN 19 2013

APR 25 2013

Revisions to Operator-Submitted EC Data for Sundry Notice #201882

	Operator Submitted	BLM Revised (AFMSS)
Sundry Type:	ABD NOI	ABD NOI
Lease:	NMNM0557565	NMNM0557565
Agreement:	SRM1172	
Operator:	THREE RIVERS OPERATING CO. 1122 S. CAPITAL OF TEXAS HWY., SUITE 325 AUSTIN, TX 79701 Ph: 432-687-3033	THREE RIVERS OPERATING CO LLC 1122 S CAPITAL OF TX HWY STE 325 AUSTIN, TX 78746 Ph: 512-600-4328
Admin Contact:	DAVID A EYLER AGENT E-Mail: DEYLER@MILAGRO-RES.COM Ph: 432-687-3033	DAVID A EYLER AGENT E-Mail: DEYLER@MILAGRO-RES.COM Ph: 432-687-3033
Tech Contact:	DAVID A EYLER AGENT E-Mail: DEYLER@MILAGRO-RES.COM Ph: 432-687-3033	DAVID A EYLER AGENT E-Mail: DEYLER@MILAGRO-RES.COM Ph: 432-687-3033
Location:		
State:	NM	NM
County:	CHAVES	CHAVES
Field/Pool:	SAND RANCH ATOKA S. (GAS)	SAND RANCH-ATOKA, SOUTH
Well/Facility:	BEALL FEDERAL 001 Sec 17 T11S R30E SWNE 1980FNL 2230FEL	BEALL FEDERAL COM 1 Sec 17 T11S R30E SWNE 1980FNL 2230FEL

320C

BEALL FED #1

API # 30-005-20483


CHAPES CO N.M.

SEC 17-115-30E

U/L G

1980' JNL; 2230 FEL

AMPAD

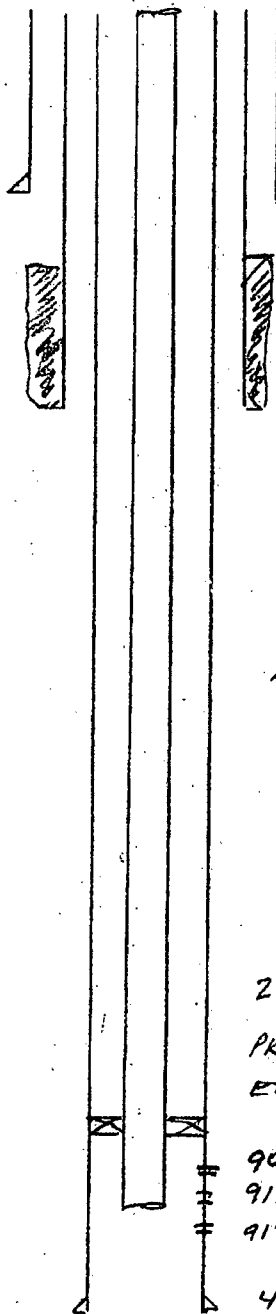

13 3/8" @ 370' W/300 SX

TOC @ 1590'

8 5/8" @ 2850' W/550 SX

24' 32"

HOLE - 7 7/8"

TOC @ 6800'

2 3/8" TBC MIT 9/30/89 720# OK

PKR @ 9060'

EDT @ 9158'

9096 - 9110'

9148 - 9150'

9170 - 9172'

C/77 1P 250 mct + 5 bpd

4 1/2" @ 9433' W/500 SX

(1975

11.6"

3ROC


BEALL FED #1

API # 30-005-20483

CHAVES CO. N.M.

SEE 17-115-308

AMPAD

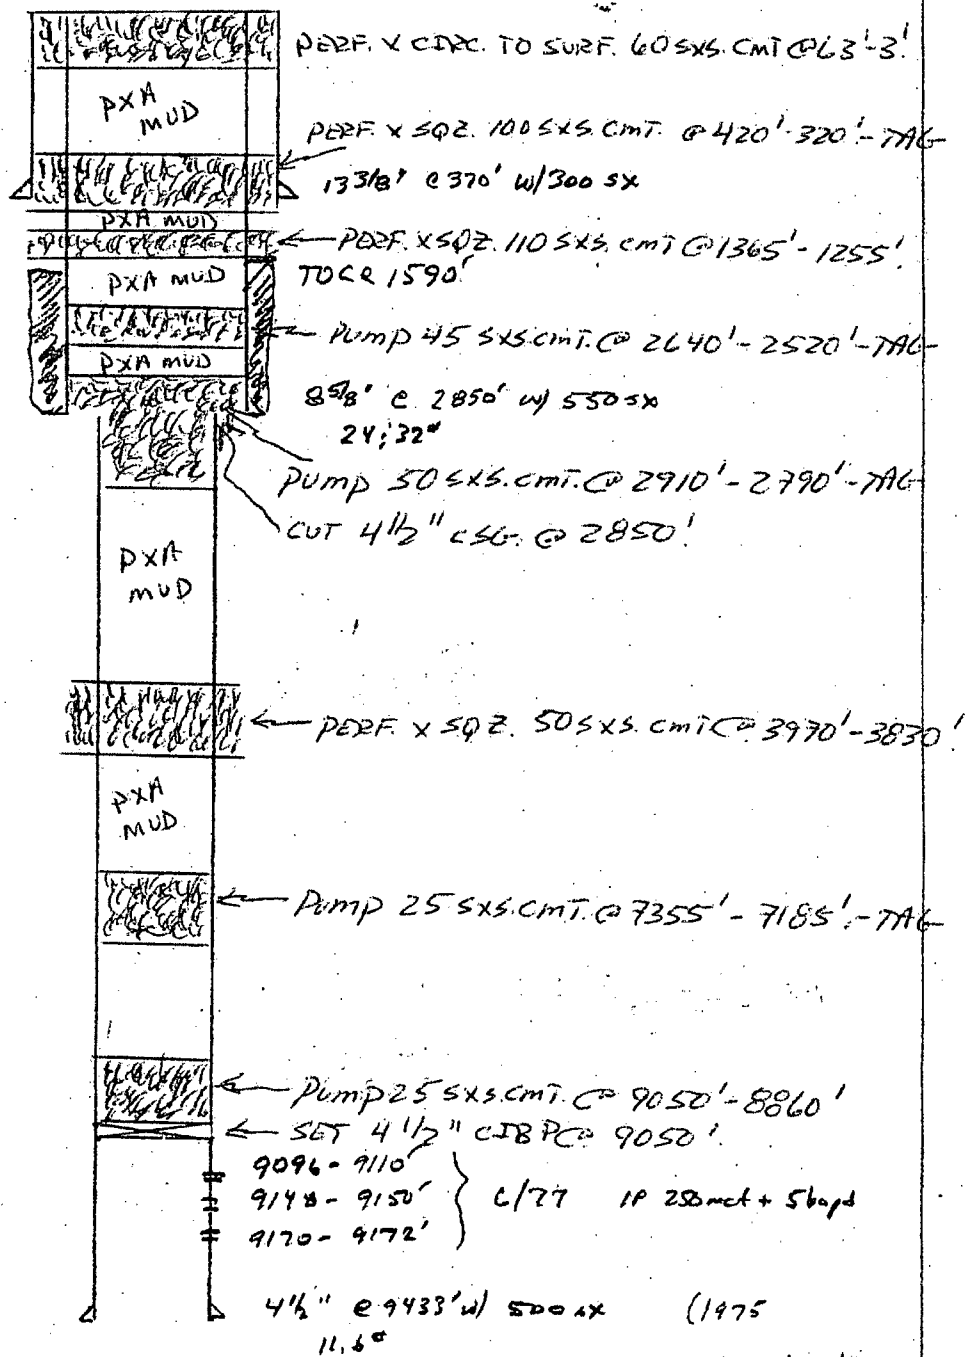

DWE 03/09/13

BUREAU OF LAND MANAGEMENT
Roswell Field Office
2909 West Second Street
Roswell, New Mexico 88201
(575) 627-0272

Permanent Abandonment of Federal Wells
Conditions of Approval

Failure to comply with the following Conditions of Approval may result in a Notice of Incidents of Noncompliance (INC) in accordance with 43 CFR 3163.1.

1. Plugging operations shall commence within **ninety (90)** days from the approval date of this Notice of Intent to Abandon. **If you are unable to plug the well by the 90th day provide the BLM Roswell Field Office (RFO), prior to the 90th day, with the reason for not meeting the deadline and a date when the BLM Roswell Field Office can expect the well to be plugged. Failure to do so will result in enforcement action. Unless the well has been properly plugged, the rig shall not be removed from over the hole without prior approval.**

2. Notification: Contact the BLM Roswell Field Office at least 24 hours prior to the commencing of any plugging operations. For wells in Chaves and Roosevelt County, during office hours or after office hours call (575) 627-0205. Engineer on call during office hours phone (575) 627-0275 or phone (after hours) call (575) 626-5749.

3. Blowout Preventers: A blowout preventer (BOP), as appropriate, shall be installed before commencing any plugging operation. The minimum BOP requirement is a 2M system for a well not deeper than 9090 feet; a 3M system for a well not deeper than 13636 feet; and a 5M system for a well not deeper than 22727 feet.

4. Mud Requirement: Mud shall be placed between all plugs. Minimum consistency of plugging mud shall be obtained by mixing at a rate of 25 sacks (50 pounds each) of gel per 100 barrels of water. Minimum nine (9) pounds per gallon.

5. Cement Requirement: Sufficient cement shall be used to bring any required plug to the specified depth and length. Any given cement volumes on the proposed plugging procedure are merely estimates and not final. Unless specific approval is received, no plug except the surface plug shall be less than 25 sacks of cement. In lieu of a cement plug in cased hole, a bridge plug set within 50 feet to 100 feet above the perforations shall be capped with 50 feet of cement. If a bailer is used to cap this plug, 35 feet of cement shall be sufficient.

Unless otherwise specified in the approved procedure, the cement plug shall consist of either class "C" for up to 7500 feet of depth, mixed at 14.8 lbs./gal with 6.3 gallons of fresh water per sack or class "H" for deeper than 7500 feet plugs, mixed at 16.4 lbs./gal with 4.3 gallons of fresh water per sack.

6. Monument: Upon abandonment of the well, all casing shall be cut-off at the base of the cellar or 3-feet below final restored ground level (whichever is deeper). The well bore shall then be covered with a metal plate at least ¼ inch thick and welded in place. The following information shall be permanently inscribed on the dry hole marker: Well name and number, the name of the operator, the lease serial number, the surveyed location (the quarter-quarter section, township and range or other authorized survey designation acceptable to the authorized officer; such as metes and bounds).

7. Timing Limitation Lease Stipulation / Condition of Approval For Lesser Prairie-Chicken: Oil and gas activities including 3-D geophysical exploration, and drilling will not be allowed in lesser prairie-chicken habitat during the period from March 1 through June 15 annually. During that period, other activities that produce noise or involve human activity, such as the maintenance of oil and gas facilities, geophysical exploration other than 3-D seismic operations, and pipeline, road, and well pad construction, will be allowed except between 3:00 am and 9:00 am. The 3:00 am to 9:00 am restriction will not apply to normal, around-the-clock operations, such as venting, flaring, or pumping, which do not require a human presence during this period. Additionally, no new drilling will be allowed within up to 200 meters of leks known at the time of permitting. Normal vehicle use on existing roads will not be restricted. Exhaust noise from pump jack engines must be muffled or otherwise controlled so as not to exceed 75 db measured at 30 feet from the source of the noise.

8. Subsequent Plugging Reporting: Within 30 days after plugging work is completed, file one original and five copies of the Subsequent Report of Abandonment, Form 3160-5 to the BLM Roswell Field Office. The report should give in detail the manner in which the plugging work was carried out, the extent (by depths) of cement plugs placed, and the size and location (by depths) of casing left in the well. **Show date well was plugged.**

Following the submittal and approval of the Subsequent Report of Abandonment, a Notice of Intent for Final Abandonment with the proposed surface restoration procedure must be submitted for approval.