

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

OCD Hobbs
HOBBS OCD

FORM APPROVED
OMB No. 1004-0137
Expires: July 31, 2010

MAR 12 2014

SUNDRY NOTICES AND REPORTS ON WELLS
Do not use this form for proposals to drill or to re-enter and
Abandoned well. Use Form 3160-3 (APD) for such proposals

SUBMIT IN TRIPLICATE – Other instructions on page 2.

1. Type of Well

☒ Oil Well ☐ Gas Well ☐ Other

2. Name of Operator

APACHE CORPORATION <873>

3. Address

303 VETERANS AIRPARK LN, #3000
MIDLAND, TX 79705

3b. Phone No. (include area Code)

432-818-1000 / 432-818-1168

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)

UL J, SEC 3, T21S, R37E, 2410' FSL & 1950' FEL

5. Lease Serial No.

NMNM-2512

6. If Indian, Allottee or Tribe Name

7. If Unit of CA/Agreement, Name and/or No.
NE DRINKARD <NMNM072602x>

8. Well Name and No.

NORTHEAST DRINKARD UNIT 269
<22503>

9. API Well No.

30-025-41272

10. Field and Pool or Exploratory Area

EUNICE; BLI-TU-DR, N. <22900>

11. County or Parish, State

LEA COUNTY, NM

12. CHECK THE APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION			
<input type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input checked="" type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input checked="" type="checkbox"/> Other
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon	<u>DRILLING OPS:</u>
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	<u>CASING & CEMENT</u>
				<u>REPORT</u>

13. Describe Proposed or Completed Operation: Clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directional or recompleat horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attached the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports must be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 must be filed once testing has been completed. Final Abandonment Notices must be filed only after all requirements, including reclamation, have been completed and the operator has determined that the site is ready for final inspection.

Bond No: BLM-CO-1463

11/14/2013 SPUD


11/15/2013 Csg 8 5/8, Hole 11", J-55, 24# set @ 1336' Cmt with:

Lead: 270 sx Class C (13.5 PPG 1.75 yld)

Tail: 200 sx Class C (14.8 PPG 1.34 yld) Circ 106 sx
WOC.

Pressure test: 1500 PSI/30 min - ok

REPORT CONTINUED ON PAGE 2.

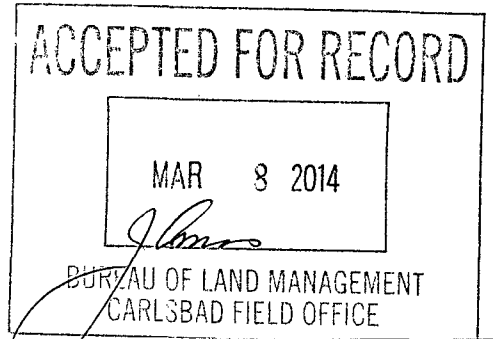

14. I hereby certify that the foregoing is true and correct.

Name (Printed/Typed)

MICHELLE COOPER

Title

DRILLING TECH

Signature

Michelle Cooper

Date

2/5/2014

THIS SPACE FOR FEDERAL OR STATE OFFICE USE

Approved by

Petroleum Engineer

Title

Date

MAR 19 2014

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Office

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Instructions on page 2)

Ka
MAR 19 2014

NORTHEAST DRINKARD UNIT 269 - Csg & Cmt End of Well Sundry

11/21/2013 Drl F/6890' – T/6971' TD. Circ and Cond Hole. RU BAKER HUGHES LOGGERS

11/22/2013 Production Csg 5.5, Hole 7.875, L-80, 17# set @ 6971' Cmt with:

Lead: 1000 sx Class C (12.6 PPG, 2.0 yld)

Tail: 325 sx Class C (14.2 PPG, 1.31 yld) WOC Circ 188 sxs

Pressure Test: 2500 PSI/30 min - ok

11/22/2013- RR