Submit I Copy To Appropriate District	State of New Mexico		Form C-103
District I - (575) 393-6161			Revised July 18, 2013
1625 N. French Dr., Hobbs, NM 88240	40		WELL API NO.
<u>District II</u> – (575) 748-1283 811 S. First St., Artesia, NM 88210	OIL CONSERVATION DIVISION		30- 025 - 25594 5. Indicate Type of Lease
District III - (505) 334-6178	1220 South St. Francis Dr.		STATE FEE
1000 Rio Brazos Rd., Aztec, NM 87410 <u>District IV</u> – (505) 476-3460	¹⁰ Santa Fe, NM 87505		6. State Oil & Gas Lease No.
1220 S. St. Francis Dr., Santa Fe, NM			
87505			B229
SUNDRY NOTICES AND REPORTS ON WELLS			7. Lease Name or Unit Agreement Name
(DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)			Arnott Ramsey NCT E.
PROPOSALS.) 1. Type of Well: Oil Well Gas Well Other HOBBS OCD			8. Well Number
2. Funde of Operator			9. OGRID Number
OXY USA Inc. 17 2014			16696
3. Address of Operator JUL 1			10. Pool name or Wildcat
P.O. Box 5	0250 Midland, TX 79710		Langlie Mattix TR Qu GB
4. Well Location		DECEIVED	
Unit Letter	1980 feet from the <u>Sout</u> Township 255 Ra	L line and L	60 feet from the east line
Section (6	Township 255 Ra	ange 37E	NMPM County Lea
	11. Elevation (Show whether DR,		
A MARKEN STRATES AND AND A MARKEN AND AND AND AND AND AND AND AND AND AN	3420_((Baskarda and Andrea States a second states and the second states of the
12. Check A	Appropriate Box to Indicate N	ature of Notice,	Report or Other Data
NOTICE OF INTENTION TO:			
PERFORM REMEDIAL WORK	PLUG AND ABANDON	REMEDIAL WOR	
		COMMENCE DRI	
PULL OR ALTER CASINGMULTIPLE COMPL CASING/CEMEN			
CLOSED-LOOP SYSTEM			
OTHER:		OTHER:	
13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date			
of starting any proposed work). SEE RULE 19.15.7.14 NMAC. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.			
TD-3700' PBTD-3320' Perfs-3382-3434' CIBP-3320'			
8-5/8" 24# csg @ 346' w/ 435sx, 12-1/4" hole, TOC-Surf-Circ			
5-1/2" 14-15.5# csg @ 3700' w/ 1375sx, 7-7/8" hole, TOC-Surf-Circ			
			1
1. RIH & tag CIBP @ 3320', M&P 25sx cmt to 3170'			
2. M&P 30sx cmt @ 2790-2590' WOC-Tag			
3. M&P 25sx cmt @ 1175-1025' WOC-Tag			
4	. M&P 55sx cmt @ 396' to surface		
	10# MLF between plugs		
Α	bove ground steel tanks will be utili	zed	
r		···-	
Spud Date:	Rig Release Da	iter	
I hereby certify that the information	above is true and complete to the be	est of my knowledge	e and belief.
1	/ /		
SIGNATURE	TITLE Sr	Regulatory Adviso	rDATE 7(15(14
SIONATORE	<u> </u>	Regulatory Auviso	
Type or print name <u>David Stewa</u>	rt E-mail address:	david_stewart@	oxy.com PHONE: <u>432-685-5717</u>
For State Use Only NA , O. P			
APPROVED BY: Malug Stown TITLE Dist Supervisor DATE 7/17/2014			
Conditions of Approval (if any):			
- V		JL	11 1 7 2014

v "

OXY USA Inc. - Proposed Arnott Ramsey NCT E #8 API No. 30-025-25596

55sx @ 396'-Surface

. -1

,r


25sx @ 1175-1025' WOC-Tag

30sx @ 2790-2590' WOC-Tag

PB-3682'

25sx @ 3320-3170'


2009-CIBP @ 3320'

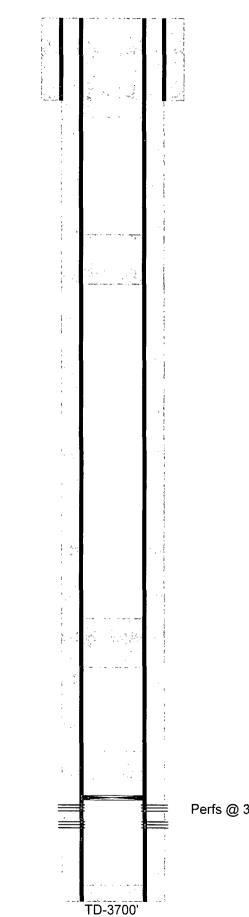

12-1/4" hole @ 346' 8-5/8" csg @ 346' w/ 435sx-TOC-Surf-Circ

Perfs @ 3382-3434'

7-7/8" hole @ 3700' 5-1/2" csg @ 3700' w/ 1375sx-TOC-Surf-Circ OXY USA Inc. - Current Arnott Ramsey NCT E #8 API No. 30-025-25596

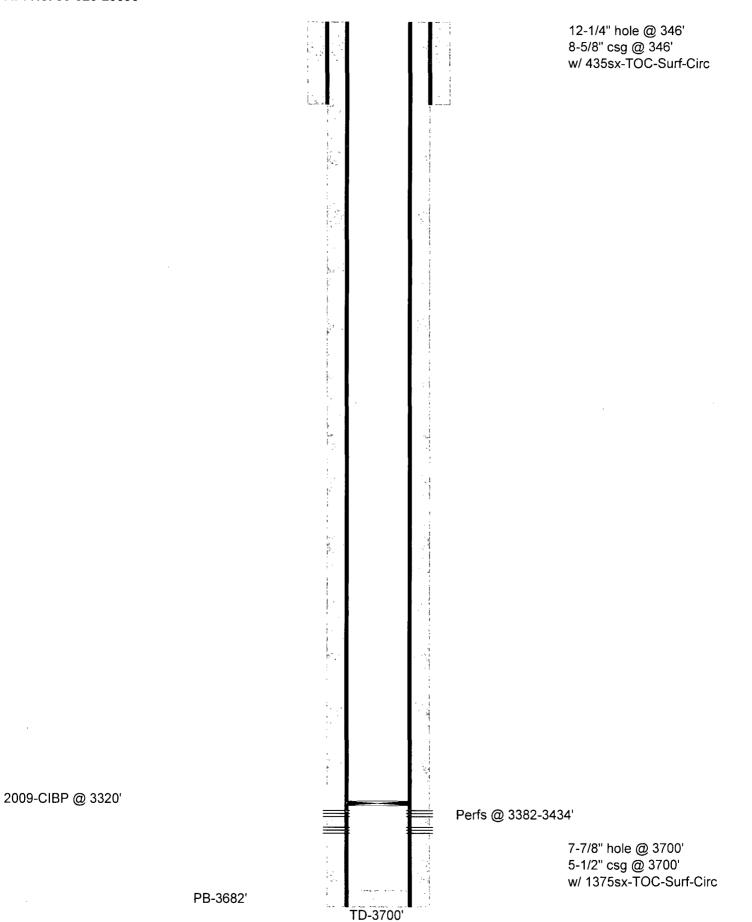

. 1