

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENTFORM APPROVED
OMB NO. 1004-0135
Expires: July 31, 2010**SUNDRY NOTICES AND REPORTS ON WELLS**
Do not use this form for proposals to drill or to re-enter an abandoned well. Use form 3160-3 (APD) for such proposals.

HOBBS OCD

MAR 30 2015

5. Lease Serial No.
NMNM125653

6. If Indian, Allottee or Tribe Name

7. If Unit or CA/Agreement, Name and/or No.

SUBMIT IN TRIPLICATE - Other instructions on reverse side.

RECEIVED

1. Type of Well

☒ Oil Well ☐ Gas Well ☐ Other

8. Well Name and No.

SALADO DRAW 29 26 33 FED COM 6H

2. Name of Operator

CHEVRON USA INCORPORATED

Contact: CINDY H MURILLO

E-Mail: CERRERAMURILLO@CHEVRON.COM

9. API Well No.

30-025-42441-00-X1

3a. Address

15 SMITH ROAD
MIDLAND, TX 79705

3b. Phone No. (include area code)

Ph: 575-263-0431
Fx: 575-263-044510. Field and Pool, or Exploratory
WC-025 G-06 S263319P

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)

Sec 29 T26S R33E NWNE 136FNL 1432FEL
32.021261 N Lat, 103.589899 W Lon

11. County or Parish, and State

LEA COUNTY, NM

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION			
<input checked="" type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input checked="" type="checkbox"/> Other
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon	Onshore Order Variance
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	

13. Describe Proposed or Completed Operation (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recompleat horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompleat in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.)

CHEVRON USA INC REQUESTS CHANGE TO THE ORIGINAL APPLICATION TO USE A CO-FLEX HOSE WITH A METAL PROTECTIVE COVERING THAT WILL BE UTILIZED BETWEEN THE BOP AND CHOKE MANIFOLD. PLEASE REFER TO THE ATTACHED TESTING AND SPECIFICATION DOCUMENTS.

SEE ATTACHED FOR
CONDITIONS OF APPROVAL

14. I hereby certify that the foregoing is true and correct.

Electronic Submission #293550 verified by the BLM Well Information System

For CHEVRON USA INCORPORATED, sent to the Hobbs

Committed to AFMSS for processing by CHRISTOPHER WALLS on 03/20/2015 (15CRW0052SE)

Name (Printed/Typed) CINDY H MURILLO

Title PERMITTING SPECIALIST

Signature (Electronic Submission)

Date 03/03/2015

THIS SPACE FOR FEDERAL OR STATE OFFICE USE

APPROVED

Approved By

Title

MAR 20 2015

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Office

/s/ Chris Walls
BUREAU OF LAND MANAGEMENT

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

BLM REVISED BLM REVISED **BLM REVISED** BLM REVISED **BLM REVISED**

MAR 21 2015

Summary of Changes to APD Submission

BOP Equipment – CoFlex Hose (Section 3 of 9 Point Drilling Plan in APD)

BOP Equipment – CoFlex Hose

Summary: Variance to use a CoFlex hose between BOP and choke manifold not requested in original submittal.

As Defined in APD:

Variance to use CoFlex hose not requested.

As Planned on Well:


Chevron requests a variance to use a CoFlex hose with a metal protective covering that will be utilized between the BOP and Choke manifold. Please refer to the attached testing and specification documents.



ContiTech

Hose Data Sheet

CRI Order No.	538332
Customer	ContiTech Oil & Marine Corp.
Customer Order No	4500412631 CBC544771, CBC544769, CBC544767, CBC544763, CBC544768, CBC544745, CBC544744, CBC544746
Item No.	1
Hose Type	Flexible Hose
Standard	API SPEC 16 C
Inside dia in inches	3
Length	45 ft
Type of coupling one end	FLANGE 4.1/16" 10KPSI API SPEC 17D SV SWIVEL FLANGE SOURC/W BX155 ST/ST INLAID R.GR.
Type of coupling other end	FLANGE 4.1/16" 10KPSI API SPEC 17D SV SWIVEL FLANGE SOURC/W BX155 ST/ST INLAID R.GR.
H2S service NACE MR0175	Yes
Working Pressure	10 000 psi
Design Pressure	10 000 psi
Test Pressure	15 000 psi
Safety Factor	2,25
Marking	USUAL PHOENIX
Cover	NOT FIRE RESISTANT
Outside protection	St steel outer wrap
Internal stripwound tube	No
Lining	OIL + GAS RESISTANT SOUR
Safety clamp	Yes
Lifting collar	Yes
Element C	Yes
Safety chain	Yes
Safety wire rope	No
Max.design temperature [°C]	100
Min.design temperature [°C]	-20
Min. Bend Radius operating [m]	0,90
Min. Bend Radius storage [m]	0,90
Electrical continuity	The Hose is electrically continuous
Type of packing	WOODEN CRATE ISPM-15



ContiTech

CONTITECH RUBBER
Industrial Kft.

No:QC-DB- 231/ 2014

Page: 10 / 119

QUALITY CONTROL INSPECTION AND TEST CERTIFICATE				CERT. N°: 594	
PURCHASER: ContiTech Oil & Marine Corp.				P.O. N°: 4500412631	
CONTITECH ORDER N°: 538332		HOSE TYPE: 3" ID Choke & Kill Hose			
HOSE SERIAL N°: 67349		NOMINAL / ACTUAL LENGTH: 13,72 m / 13,85 m			
W.P. 68,9 MPa 10000 psi		T.P. 103,4 MPa 15000 psi		Duration: 60 min.	
Pressure test with water at ambient temperature					
See attachment. (1 page)					
↑ 10 mm = 10 Min. → 10 mm = 25 MPa					
COUPLINGS Type		Serial N°		Quality	
3" coupling with 4 1/16" 10K API Swivel Flange end Hub		1435 1436		AISI 4130 AISI 4130 AISI 4130	
				Heat N° A1258U 034939 A1045N	
Not Designed For Well Testing				API Spec 16 C	
Tag No.: 66 - 1198				Temperature rate: "B"	
All metal parts are flawless					
WE CERTIFY THAT THE ABOVE HOSE HAS BEEN MANUFACTURED IN ACCORDANCE WITH THE TERMS OF THE ORDER INSPECTED AND PRESSURE TESTED AS ABOVE WITH SATISFACTORY RESULT.					
STATEMENT OF CONFORMITY: We hereby certify that the above items/equipment supplied by us are in conformity with the terms, conditions and specifications of the above Purchaser Order and that these items/equipment were fabricated inspected and tested in accordance with the referenced standards, codes and specifications and meet the relevant acceptance criteria and design requirements.					
Date: 03. April 2014.		Inspector		Quality Control ContiTech Rubber Industrial Kft. Quality Control Dept. (1) <i>[Signature]</i>	


ATTACHMENT OF QUALITY CONTROL INSPECTION AND TEST CERTIFICATE

No: 594, 596, 597

Page: 1/1

Boşanç Zorak

Genelkurum Müdür
İnşaatlar Böl.
Kalite Kontrol Dept.
(1)

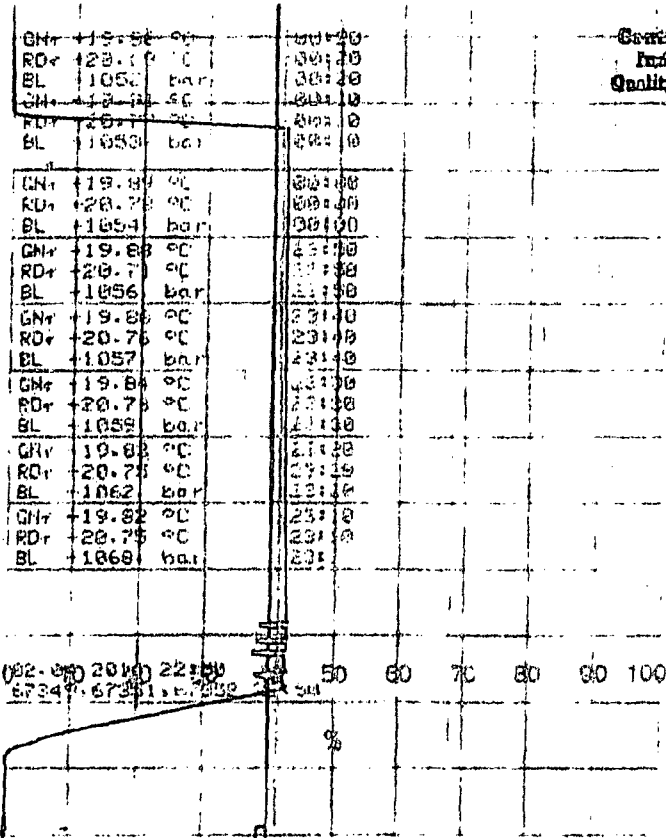

Co-Flex line
Conditions of Approval

Variance approved to use flex line from BOP to choke manifold. Check condition of flexible line from BOP to choke manifold, replace if exterior is damaged or if line fails test. Line to be as straight as possible with no hard bends and is to be anchored according to Manufacturer's requirements. The flexible hose can be exchanged with a hose of equal size and equal or greater pressure rating. **Anchor requirements, specification sheet and hydrostatic pressure test certification matching the hose in service, to be onsite for review.** If the BLM inspector questions the straightness of the hose, a BLM engineer will be contacted and will review in the field or via picture supplied by inspector to determine if changes are required (operator shall expect delays if this occurs).