Form 3160-5 (August 2007)

# **UNITED STATES** DEPARTMENT OF THE INTERIOR BUREAU OF LAND MANAGEMENT

FORM APPROVED OMB NO. 1004-0135 Expires: July 31, 2010

5. Lease Serial No. NMNM0103893

SUNDRY NOTICES AND REPORTS ON WELLS Do not use this form for proposals to drill or to re-enter an abandoned well. Use form 3160-3 (APD) for such proposals.

6. If Indian, Allottee or Tribe Name

	PLICATE - Other instruction	ne on reverse side	If Can or	Agreement, Name and/or No.	
The state of the s	FLIGHTE - Other mstruction	ILIN O O		161-	
1. Type of Well  ☑ Oil Well ☐ Gas Well ☐ Other		JUN 2 0	8. Well var ALLIED	rell No.	
Name of Operator     DUGAN PRODUCTION COR	Contact: ALI PORATIŒMail: aliph.reena@d	PH REENA RECE	9. API Well 30-025-	No. 24309-00-\$1	
		Phone No. (include area code n: 505-325-1821	e) 10. Field and Pool, or Exploratory SAWYER		
FARMINGTON, NM 87499		1. 505-525-1021			
<ol> <li>Location of Well (Footage, Sec., T Sec 24 T9S R37E NWNW 660</li> </ol>				or Parish, and State	
12. CHECK APP	ROPRIATE BOX(ES) TO IN	IDICATE NATURE OF	NOTICE, REPORT, OF	OTHER DATA	
TYPE OF SUBMISSION		ТҮРЕ О	F ACTION		
	☐ Acidize	☐ Deepen	☐ Production (Start/F	INT TO PA	
☑ Notice of Intent	☐ Alter Casing	☐ Fracture Treat	□ Reclamation	P&A NR	
☐ Subsequent Report	☐ Casing Repair	■ New Construction	☐ Recomplete	P&A R	
☐ Final Abandonment Notice	☐ Change Plans	☑ Plug and Abandon	□ Temporarily Aban		
	☐ Convert to Injection	☐ Plug Back	□ Water Disposal		
Chemical cut @ 3844'. Work hole. Couldn't get fish out of t	on tubing for 15 work days. The hole. We request to plug	6'. Tried to pull out of the Tag top of 2-3/8" tubing a and abandon the well as	t 3950' in the		
Chemical cut @ 3844'. Work hole. Couldn't get fish out of t following procedure:  1) Tag top of the fish. Set GR 2) Test casing above retainer 3900'. Pump 160 sks (190 cu + 100% excess to the top per neat above retainer. Plug 1-3) Perforate @ 2950'. Set ins 2850'-2950'.	on tubing for 15 work days. the hole. We request to plug 2 3900'. to 600 psi. Sting into retaine ft Class B neat, 1.18 cu ft/sk, foration). Spot plug with 12 s 3800'-4939'. 149 44 3904 iide/outside plug w/50 sks, 59	Tag top of 2-3/8" tubing a and abandon the well as r. Establish rate below ret 15.6#) cement below ret ks (14.2 cu ft, 1.18 cu ft/s	t 3950' in the per the  SEE ATTAC  Stainer (capapity DITION  sk) Class BUNDITION	CHED FOR IS OF APPROVAL	
Chemical cut @ 3844'. Work hole. Couldn't get fish out of t following procedure:  1) Tag top of the fish. Set GR 2) Test casing above retainer 3900'. Pump 160 sks (190 cu + 100% excess to the top per neat above retainer. Plug 1-3) Perforate @ 2950'. Set ins 2850'-2950'.	on tubing for 15 work days. the hole. We request to plug 2 3900'. to 600 psi. Sting into retaine ft Class B neat, 1.18 cu ft/sk, foration). Spot plug with 12 s 3800'-4939'. 143 44 390' iide/outside plug w/50 sks, 59	r. Establish rate below ret ks (14.2 cu ft, 1.18 cu ft/s) cu ft Class B cement. P	t 3950' in the per the  SEE ATTAC  chainer (Capacity DITION  sk) Class BUY DITION  lug II -	HED FOR IS OF APPROVAL	
Chemical cut @ 3844'. Work hole. Couldn't get fish out of t following procedure:  1) Tag top of the fish. Set GR 2) Test casing above retainer 3900'. Pump 160 sks (190 cu + 100% excess to the top per neat above retainer. Plug 1-3) Perforate @ 2950'. Set ins 2850'-2950'.	on tubing for 15 work days. The hole. We request to plug the hole. We request to plug with 2 3900'. The hole is to 600 psi. Sting into retaine ft Class B neat, 1.18 cu ft/sk, foration). Spot plug with 12 s 3800'-4939'. The hole is true and correct.  Electronic Submission #3374  For DUGAN PRODUC	Tag top of 2-3/8" tubing a and abandon the well as r. Establish rate below ret 15.6#) cement below ret ks (14.2 cu ft, 1.18 cu ft/s or higher act of the cut ft Class B cement. P	t 3950' in the per the  SEE ATTAC  etainer (Capacity DITION  lug II -  ell Information System  nt to the Hobbs	IS OF APPROVAL	
Chemical cut @ 3844'. Work hole. Couldn't get fish out of t following procedure:  1) Tag top of the fish. Set GR 2) Test casing above retainer 3900'. Pump 160 sks (190 cu + 100% excess to the top per neat above retainer. Plug 1-3) Perforate @ 2950'. Set ins 2850'-2950'.  2853-2950'.  2853-2983  Lever Praire L.  14. I hereby certify that the foregoing is	on tubing for 15 work days. the hole. We request to plug  (a) 3900'. to 600 psi. Sting into retaine ft Class B neat, 1.18 cu ft/sk, foration). Spot plug with 12 s 3800'-4939'. 143 44 390' side/outside plug w/50 sks, 59  The and correct.  Electronic Submission #3374  For DUGAN PRODUC mmitted to AFMSS for processi	Tag top of 2-3/8" tubing a and abandon the well as r. Establish rate below ret (15.6#) cement below ret (14.2 cu ft, 1.18 cu ft/s) or higher a cu ft Class B cement. P	at 3950' in the per the stainer SEE ATTAC ainer (capacity DITION) lug II - ell Information System at to the Hobbs on 04/27/2016 (16PP0590S	IS OF APPROVAL	
Chemical cut @ 3844'. Work hole. Couldn't get fish out of t following procedure:  1) Tag top of the fish. Set GR 2) Test casing above retainer 3900'. Pump 160 sks (190 cu + 100% excess to the top per neat above retainer. Plug 1-3) Perforate @ 2950'. Set ins 2850'-2950'.	on tubing for 15 work days. the hole. We request to plug  (a) 3900'. to 600 psi. Sting into retaine ft Class B neat, 1.18 cu ft/sk, foration). Spot plug with 12 s 3800'-4939'. 143 44 390' side/outside plug w/50 sks, 59  The and correct.  Electronic Submission #3374  For DUGAN PRODUC mmitted to AFMSS for processi	Tag top of 2-3/8" tubing a and abandon the well as r. Establish rate below ret (15.6#) cement below ret (14.2 cu ft, 1.18 cu ft/s) or higher a cu ft Class B cement. P	t 3950' in the per the  SEE ATTAC  etainer (Capacity DITION  lug II -  ell Information System  nt to the Hobbs	IS OF APPROVAL	
Chemical cut @ 3844'. Work hole. Couldn't get fish out of t following procedure:  1) Tag top of the fish. Set GR 2) Test casing above retainer 3900'. Pump 160 sks (190 cu + 100% excess to the top per neat above retainer. Plug 1-3) Perforate @ 2950'. Set ins 2850'-2950'.  2853-2950'.  2853-2983  Lever Praire L.  14. I hereby certify that the foregoing is	on tubing for 15 work days. The hole. We request to plug the hole. We request to plug with 2 may be a structure and correct.  Electronic Submission #3374  For DUGAN PRODUC mmitted to AFMSS for procession in hole. We request to plug with 12 structure and correct.  Electronic Submission #3374  For DUGAN PRODUC mmitted to AFMSS for procession in the hole. We request the hole. The hole in the hole. We request the hole in the h	Tag top of 2-3/8" tubing a and abandon the well as r. Establish rate below ret (15.6#) cement below ret (14.2 cu ft, 1.18 cu ft/s) or higher a cu ft Class B cement. P	t 3950' in the per the  SEE ATTAC  elainer (Capacity DITION  lug II -  ell Information System  nt to the Hobbs on 04/27/2016 (16PP0590S  UCTION ENGINEER	IS OF APPROVAL	
Chemical cut @ 3844'. Work hole. Couldn't get fish out of t following procedure:  1) Tag top of the fish. Set GR 2) Test casing above retainer 3900'. Pump 160 sks (190 cu + 100% excess to the top per neat above retainer. Plug 1-3) Perforate @ 2950'. Set ins 2850'-2950'.  2853-2950'.  14. I hereby certify that the foregoing is Con Name (Printed/Typed) ALIPH RE	on tubing for 15 work days. The hole. We request to plug the hole. We request to plug with 2 may be a strue and correct.  Electronic Submission #3374  For DUGAN PRODUC nmitted to AFMSS for procession)	Tag top of 2-3/8" tubing a and abandon the well as r. Establish rate below ret 15.6#) cement below ret ks (14.2 cu ft, 1.18 cu ft/s or higher action country of the BLM Westion Corporation, seing by PRISCILLA PEREZ of Title PROD	t 3950' in the per the  SEE ATTAC  Stainer (Capacity DITION  Sk) Class B N DITION  lug II -  Bill Information System of to the Hobbs on 04/27/2016 (16PP0590S)  UCTION ENGINEER	IS OF APPROVAL	
Chemical cut @ 3844'. Work hole. Couldn't get fish out of t following procedure:  1) Tag top of the fish. Set GR 2) Test casing above retainer 3900'. Pump 160 sks (190 cu + 100% excess to the top per neat above retainer. Plug 1-3) Perforate @ 2950'. Set ins 2850'-2950'. 2950'. 2950'. 2950'. 14. I hereby certify that the foregoing is Con Name (Printed/Typed) ALIPH RESignature (Electronic Standard Control of Control	on tubing for 15 work days. The hole. We request to plug the hole. We request to plug with 2 may be a strue and correct.  Electronic Submission #3374  For DUGAN PRODUC nmitted to AFMSS for procession)	Tag top of 2-3/8" tubing a and abandon the well as r. Establish rate below ret 15.6#) cement below ret ks (14.2 cu ft, 1.18 cu ft/s of the cu ft Class B cement. P cu ft Class B cement. P Title PROD	t 3950' in the per the  SEE ATTAC  Stainer (Capacity DITION  Sk) Class B N DITION  lug II -  Bill Information System of to the Hobbs on 04/27/2016 (16PP0590S)  UCTION ENGINEER	IS OF APPROVAL	
Chemical cut @ 3844'. Work hole. Couldn't get fish out of t following procedure:  1) Tag top of the fish. Set GR 2) Test casing above retainer 3900'. Pump 160 sks (190 cu + 100% excess to the top per neat above retainer. Plug 1-3) Perforate @ 2950'. Set ins 2850'-2950'. 2950'. 2950'. 2950'. 14. I hereby certify that the foregoing is Con Name (Printed/Typed) ALIPH RESignature (Electronic set)	on tubing for 15 work days. the hole. We request to plug the hole. We request to plug with 2 s 3900'. The foliation of the company of the com	Tag top of 2-3/8" tubing a and abandon the well as r. Establish rate below ref. 15.6#) cement below ref. (14.2 cu ft, 1.18 cu ft/s) or higher a cu ft Class B cement. P. Cu ft Class B cement. P. Title PROD.  Date 04/26/5  FEDERAL OR STATE  Title Warrant or	t 3950' in the per the  SEE ATTAC  Stainer (Capacity DITION  Sk) Class B N DITION  lug II -  Bill Information System of to the Hobbs on 04/27/2016 (16PP0590S)  UCTION ENGINEER	D Date	

MW/OCD 6/28/2016


### Additional data for EC transaction #337485 that would not fit on the form

### 32. Additional remarks, continued

4) Perforate @ 2440'. Set inside/outside plug w/50 sks, 59 cu ft Class B cement. Plug III - 2340'-2440'. 2320 - 2440'. 5) Perforate @ 410'. Establish circulation to surface. Circulate cement to surface from 410' to surface w/120 sks (142 cu ft) Class B cement (surface-410').
6) Tag TOC @ surface. Fill cement in case it is needed. Cut wellhead.
7) Install dry hole marker. Clean location.

### Planned P & A Schematic

Allied 93 # 1, San Andres 30-025-24309 660' FNL & 660' FWL D S24 T9S R37E

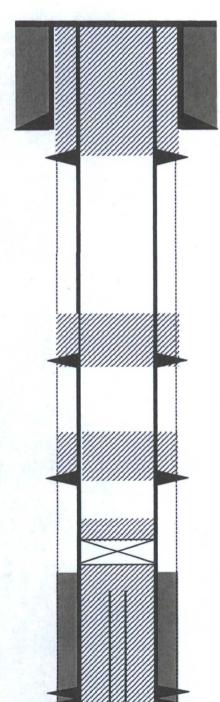

708 Sait: 2395 Yates: 2933

8 5/8" J-55 28.5# casing @ 360'. Cement to surface w/ 275 sks Class C w/ 2% cement.

Perforate @ 410'. Pump cement to surface w/ 120 sks Class B neat (142 cu.ft) (Surface '-410).

2445

Perforate @ 2440'. Inside/outside plug with 50 sks Class B, 59 Cu.ft (2340'-2440') 749

2320-2445

2983

Perforate @ 2950'. Inside/outside plug with 50 sacks Class B, 59 Cu.ft (2850'-2950').

2853-2983

Set GR @ 3900'. Pump 160 sks, 189 cu.ft Class B below retainer. Spot 12 sks, 14.2 cu.ft above retainer. (3900'-4939')

Top of the fish at 3950'

Cemented with 250 sks Class C with 2% gel. Calculated TOC @ 3943' w/ 75% Volume.

San Andres Perforated @ 4939' - 5031'

4 1/2" 9.5 # casing @ 5072'. PBTD @ 5047'

5071

23" tubing to 5039



# United States Department of the Interior

#### BUREAU OF LAND MANAGEMENT

Carlsbad Field Office 620 E. Greene St. Carlsbad, New Mexico 88220-6292 www.blm.gov/nm



In Reply Refer To: 1310

### Reclamation Objectives and Procedures

Reclamation Objective: Oil and gas development is one of many uses of the public lands and resources. While development may have a short- or long-term effect on the land, successful reclamation can ensure the effect is not permanent. During the life of the development, all disturbed areas not needed for active support of production operations should undergo "interim" reclamation in order to minimize the environmental impacts of development on other resources and uses. At final abandonment, well locations, production facilities, and access roads must undergo "final" reclamation so that the character and productivity of the land and water are restored.

The long-term objective of final reclamation is to set the course for eventual ecosystem restoration, including the restoration of the natural vegetation community, hydrology, and wildlife habitats. In most cases this means returning the land to a condition approximating or equal to that which existed prior to the disturbance. The final goal of reclamation is to restore the character of the land and water to its predisturbance condition. The operator is generally not responsible for achieving full ecological restoration of the site. Instead, the operator must achieve the short-term stability, visual, hydrological, and productivity objectives of the surface management agency and take steps necessary to ensure that long-term objectives will be reached through natural processes.

To achieve these objectives, remove any and all contaminants, scrap/trash, equipment, pipelines and powerlines. Strip and remove caliche, contour the location to blend with the surrounding landscape, redistribute the native soils, provide erosion control as needed, rip and seed as specified in the original APD COA. This will apply to well pads, facilities, and access roads. Barricade access road at the starting point. If reserve pits have not reclaimed due to salts or other contaminants, submit a plan for approval, as to how you propose to provide adequate restoration of the pit area.

- The Application for Permit to Drill or Reenter (APD, Form 3160-3), Surface Use Plan of
  Operations must include adequate measures for stabilization and reclamation of disturbed lands.
  Oil and Gas operators must plan for reclamation, both interim and final, up front in the APD
  process as per Onshore Oil and Gas Order No. 1.
- 2. For wells and/or access roads not having an approved plan, or an inadequate plan for surface reclamation (either interim or final reclamation), the operator must submit a proposal describing the procedures for reclamation. For interim reclamation, the appropriate time for submittal would be when filing the Well Completion or Recompletion Report and Log (Form 3160-4). For final reclamation, the appropriate time for submittal would be when filing the Notice of Intent, or the Subsequent Report of Abandonment, Sundry Notices and Reports on Wells (Form 3160-5). Interim reclamation is to be completed within 6 months of well completion, and final reclamation is to be completed within 6 months of well abandonment.
- 3. The operator must file a Subsequent Report Plug and Abandonment (Form 3160-5) following the plugging of a well.

- 4. Previous instruction had you waiting for a BLM specialist to inspect the location and provide you with reclamation requirements. If you have an approved Surface Use Plan of Operation and/or an approved Sundry Notice, you are free to proceed with reclamation as per approved APD. If you have issues or concerns, contact a BLM specialist to assist you. It would be in your interest to have a BLM specialist look at the location and access road prior to the removal of reclamation equipment to ensure that it meets BLM objectives. Upon conclusion submit a Form 3160-5, Subsequent Report of Reclamation. This will prompt a specialist to inspect the location to verify work was completed as per approved plans.
- 5. The approved Subsequent Report of Reclamation will be your notice that the native soils, contour and seedbed have been reestablished. If the BLM objectives have not been met the operator will be notified and corrective actions may be required.
- 6. It is the responsibility of the operator to monitor these locations and/or access roads until such time as the operator feels that the BLM objective has been met. If after two growing seasons the location and/or access roads are not showing the potential for successful revegetation, additional actions may be needed. When you feel the BLM objectives have been met submit a Final Abandonment Notice (FAN), Form 3160-5, stating that all reclamation requirements have been achieved and the location and/or access road is ready for a final abandonment inspection.
- 7. At this time the BLM specialist will inspect the location and/or access road. If the native soils and contour have been restored, and the revegetation is successful, the FAN will be approved, releasing the operator of any further liability of the location and/or access road. If the location and/or access road have not achieved the objective, you will be notified as to additional work needed or additional time being needed to achieve the objective.

If there are any questions, please feel free to contact any of the following specialists:

Jim Amos Supervisory Petroleum Engineering Tech 575-234-5909, 575-361-2648 (Cell)

Arthur Arias Environmental Protection Specialist 575-234-6230

Linda Denniston Environmental Protection Specialist 575-234-5974

Henryetta Price Environmental Protection Specialist 575-234-5951

Dara Glass Environmental Protection Specialist 575-234-5924

Shelly Tucker Environmental Protection Specialist 575-234-5979

## BUREAU OF LAND MANAGEMENT Carlsbad Field Office 620 East Greene Street Carlsbad, New Mexico 88220 575-234-5972

### Permanent Abandonment of Federal Wells Conditions of Approval (LPC Habitat)

Failure to comply with the following Conditions of Approval may result in a Notice of Incidents of Noncompliance (INC) in accordance with 43 CFR 3163.1.

1. Plugging operations shall commence within <u>ninety (90)</u> days from the approval date of this Notice of Intent to Abandon.

If you are unable to plug the well by the 90<sup>th</sup> day provide this office, prior to the 90<sup>th</sup> day, with the reason for not meeting the deadline and a date when we can expect the well to be plugged. Failure to do so will result in enforcement action.

The rig used for the plugging procedure cannot be released and moved off without the prior approval of the authorized officer. Failure to do so may result in enforcement action.

- 2. <u>Notification:</u> Contact the appropriate BLM office at least 24 hours prior to the commencing of any plugging operations. For wells in Chaves and Roosevelt County, call 575-627-0272; Eddy County, call 575-361-2822; Lea County, call 575-393-3612.
- 3. <u>Blowout Preventers</u>: A blowout preventer (BOP), as appropriate, shall be installed before commencing any plugging operation. The BOP must be installed and maintained as per API and manufacturer recommendations. The minimum BOP requirement is a 2M system for a well not deeper than 9,090 feet; a 3M system for a well not deeper than 13,636 feet; and a 5M system for a well not deeper than 22,727 feet.
- 4. <u>Mud Requirement:</u> Mud shall be placed between all plugs. Minimum consistency of plugging mud shall be obtained by mixing at the rate of 25 sacks (50 pounds each) of gel per 100 barrels of **brine** water. Minimum nine (9) pounds per gallon.
- 5. <u>Cement Requirement</u>: Sufficient cement shall be used to bring any required plug to the specified depth and length. Any given cement volumes on the proposed plugging procedure are merely estimates and are not final. Unless specific approval is received, no plug except the surface plug shall be less than 25 sacks of cement. Any plug that requires a tag will have a minimum WOC time of 4 hours.

In lieu of a cement plug across perforations in a cased hole (not for any other plugs), a bridge plug set within 50 feet to 100 feet above the perforations shall be capped with 25 sacks of cement. If a bailer is used to cap this plug, 35 feet of cement shall be sufficient. Before pumping or bailing cement on top of CIBP, tag will be required to verify depth. Based on depth, a tag of the cement may be deemed necessary.

Unless otherwise specified in the approved procedure, the cement plug shall consist of either Neat Class "C", for up to 7,500 feet of depth or Neat Class "H", for deeper than 7,500 feet plugs.

6. Below Ground Level Cap (Lesser Prairie-Chicken Habitat): All casing shall be cut-off at the base of the cellar or 3 feet below final restored ground level (whichever is deeper). The BLM is to be notified a minimum of 4 hours prior to the wellhead being cut off to verify that cement is to surface in the casing and all annuluses. Wellhead cut off shall commence within ten (10) calendar days of the well being plugged. If the cut off cannot be done by the 10<sup>th</sup> day, the BLM is to be contacted with justification to receive an extension for completing the cut off. Upon the plugging and subsequent abandonment of wells that are located in lesser prairie-chicken habitat, the casings shall be cut-off at the base of the cellar or 3 feet below final restored ground level (whichever is deeper). The well bore shall then be covered with a metal plate at least ¼ inch thick and welded in place. A weep hole shall be left in the plate and/or casing.

NMOCD also requires the operator to notify NMOCD when this type of dry hole marker is used. This can be done on the subsequent report of abandonment which is submitted to the BLM after the well is plugged. State that a below ground cap was installed as required in the COA's from the BLM.

- 7. <u>Subsequent Plugging Reporting:</u> Within 30 days after plugging work is completed, file one original and three copies of the Subsequent Report of Abandonment, Form 3160-5 to BLM. The report should give in detail the manner in which the plugging work was carried out, the extent (by depths) of cement plugs placed, and the size and location (by depths) of casing left in the well. **Show date well was plugged.**
- 8. <u>Trash</u>: All trash, junk and other waste material shall be contained in trash cages or bins to prevent scattering and will be removed and deposited in an approved sanitary landfill. Burial on site is not permitted.

Following the submission and approval of the Subsequent Report of Abandonment, surface restoration will be required. See attached reclamation objectives.

<u>Timing Limitation Stipulation/ Condition of Approval for Lesser Prairie-Chicken:</u>
From March 1<sup>st</sup> through June 15<sup>th</sup> annually, abandonment activities will be allowed except between the hours from 3:00 am and 9:00 am. Normal vehicle use on existing roads will not be restricted