

Form 3160-3
(March 2012)

HOBBS OC

AUG 16 2018

RECEIVED

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

APPLICATION FOR PERMIT TO DRILL OR REENTER

FORM APPROVED
OMB No. 1004-0137
Expires October 31, 2014

5. Lease Serial No.
NMNM0000082

6. If Indian, Allottee or Tribe Name

7. If Unit or CA Agreement, Name and No.

8. Lease Name and Well No. (32258)
LITTLE BEAR FEDERAL COM 7H

9. API Well No.
30-025-45103

10. Field and Pool, or Exploratory
WILDCAT / WOLFCAMP

11. Sec., T. R. M. or Blk. and Survey or Area
SEC 33 / T20S / R34E / NMP

1a. Type of work: ☒ DRILL ☐ REENTER

1b. Type of Well: ☒ Oil Well ☐ Gas Well ☐ Other ☐ Single Zone ☒ Multiple Zone

2. Name of Operator
COG OPERATING LLC (229137)

3a. Address
600 West Illinois Ave Midland TX 79701

3b. Phone No. (include area code)
(432)683-7443

4. Location of Well (Report location clearly and in accordance with any State requirements.)
At surface SWSE / 696 FSL / 2137 FEL / LAT 32.524238 / LONG -103.563575
At proposed prod. zone NWSE / 2440 FSL / 1650 FEL / LAT 32.543555 / LONG -103.562019

14. Distance in miles and direction from nearest town or post office*
14 miles

12. County or Parish
LEA

13. State
NM

15. Distance from proposed*
location to nearest
property or lease line, ft.
(Also to nearest drg. unit line, if any)
200 feet

16. No. of acres in lease
600

17. Spacing Unit dedicated to this well
240

18. Distance from proposed location*
to nearest well, drilling, completed, 2935 feet
applied for, on this lease, ft.

19. Proposed Depth
11620 feet / 19108 feet

20. BLM/BIA Bond No. on file
FED: NMB000215

21. Elevations (Show whether DF, KDB, RT, GL, etc.)
3806 feet

22. Approximate date work will start*
07/01/2018

23. Estimated duration
30 days

24. Attachments

The following, completed in accordance with the requirements of Onshore Oil and Gas Order No. 1, must be attached to this form:

1. Well plat certified by a registered surveyor.
2. A Drilling Plan.
3. A Surface Use Plan (if the location is on National Forest System Lands, the SUPO must be filed with the appropriate Forest Service Office).
4. Bond to cover the operations unless covered by an existing bond on file (see Item 20 above).
5. Operator certification
6. Such other site specific information and/or plans as may be required by the BLM.

25. Signature
(Electronic Submission)

Name (Printed/Typed)
Mayte Reyes / Ph: (575)748-6945

Date
04/19/2018

Title
Regulatory Analyst

Approved by (Signature)
(Electronic Submission)

Name (Printed/Typed)
Christopher Walls / Ph: (575)234-2234

Date
08/07/2018

Title
Petroleum Engineer

Office
CARLSBAD

Application approval does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.
Conditions of approval, if any, are attached.

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Continued on page 2)

*(Instructions on page 2)

GCP Rec 08/16/18

APPROVED WITH CONDITIONS

Approval Date: 08/07/2018

KZ
08/16/18

DS

INSTRUCTIONS

GENERAL: This form is designed for submitting proposals to perform certain well operations, as indicated on Federal and Indian lands and leases for action by appropriate Federal agencies, pursuant to applicable Federal laws and regulations. Any necessary special instructions concerning the use of this form and the number of copies to be submitted, particularly with regard to local, area, or regional procedures and practices, either are shown below or will be issued by, or may be obtained from local Federal offices.

ITEM 1: If the proposal is to redrill to the same reservoir at a different subsurface location or to a new reservoir, use this form with appropriate notations. Consult applicable Federal regulations concerning subsequent work proposals or reports on the well.

ITEM 4: Locations on Federal or Indian land should be described in accordance with Federal requirements. Consult local Federal offices for specific instructions.

ITEM 14: Needed only when location of well cannot readily be found by road from the land or lease description. A plat, or plats, separate or on the reverse side, showing the roads to, and the surveyed location of, the well, and any other required information, should be furnished when required by Federal agency offices.

ITEMS 15 AND 18: If well is to be, or has been directionally drilled, give distances for subsurface location of hole in any present or objective productive zone.

ITEM 22: Consult applicable Federal regulations, or appropriate officials, concerning approval of the proposal before operations are started.

NOTICES

The Privacy Act of 1974 and regulation in 43 CFR 2.48(d) provide that you be furnished the following information in connection with information required by this application.

AUTHORITY: 30 U.S.C. 181 et seq., 25 U.S.C. 396; 43 CFR 3160

PRINCIPAL PURPOSES: The information will be used to: (1) process and evaluate your application for a permit to drill a new oil, gas, or service well or to reenter a plugged and abandoned well; and (2) document, for administrative use, information for the management, disposal and use of National Resource Lands and resources including (a) analyzing your proposal to discover and extract the Federal or Indian resources encountered; (b) reviewing procedures and equipment and the projected impact on the land involved; and (c) evaluating the effects of the proposed operation on the surface and subsurface water and other environmental impacts.

ROUTINE USE: Information from the record and/or the record will be transferred to appropriate Federal, State, and local or foreign agencies, when relevant to civil, criminal or regulatory investigations or prosecution, in connection with congressional inquiries and for regulatory responsibilities.

EFFECT OF NOT PROVIDING INFORMATION: Filing of this application and disclosure of the information is mandatory only if you elect to initiate a drilling or reentry operation on an oil and gas lease.

The Paperwork Reduction Act of 1995 requires us to inform you that:

The BLM collects this information to allow evaluation of the technical, safety, and environmental factors involved with drilling for oil and/or gas on Federal and Indian oil and gas leases. This information will be used to analyze and approve applications.

Response to this request is mandatory only if the operator elects to initiate drilling or reentry operations on an oil and gas lease.

The BLM would like you to know that you do not have to respond to this or any other Federal agency-sponsored information collection unless it displays a currently valid OMB control number.

BURDEN HOURS STATEMENT: Public reporting burden for this form is estimated to average 8 hours per response, including the time for reviewing instructions, gathering and maintaining data, and completing and reviewing the form. Direct comments regarding the burden estimate or any other aspect of this form to U.S. Department of the Interior, Bureau of Land Management (1004-0137), Bureau Information Collection Clearance Officer (WO-630), 1849 C Street, N.W., Mail Stop 401 LS, Washington, D.C. 20240.

Additional Operator Remarks

Location of Well

1. SHL: SWSE / 696 FSL / 2137 FEL / TWSP: 20S / RANGE: 34E / SECTION: 33 / LAT: 32.524238 / LONG: -103.563575 (TVD: 0 feet, MD: 0 feet)
PPP: SWNE / 2640 FNL / 1650 FEL / TWSP: 20S / RANGE: 34E / SECTION: 33 / LAT: 32.529587 / LONG: -103.561993 (TVD: 11515 feet, MD: 14400 feet)
PPP: SWSE / 330 FSL / 1650 FEL / TWSP: 20S / RANGE: 34E / SECTION: 33 / LAT: 32.523233 / LONG: -103.561993 (TVD: 5164 feet, MD: 5200 feet)
BHL: NWSE / 2440 FSL / 1650 FEL / TWSP: 20S / RANGE: 34E / SECTION: 28 / LAT: 32.543555 / LONG: -103.562019 (TVD: 11620 feet, MD: 19108 feet)

BLM Point of Contact

Name: Priscilla Perez

Title: Legal Instruments Examiner

Phone: 5752345934

Email: pperez@blm.gov

CONFIDENTIAL

Review and Appeal Rights

A person contesting a decision shall request a State Director review. This request must be filed within 20 working days of receipt of the Notice with the appropriate State Director (see 43 CFR 3165.3). The State Director review decision may be appealed to the Interior Board of Land Appeals, 801 North Quincy Street, Suite 300, Arlington, VA 22203 (see 43 CFR 3165.4). Contact the above listed Bureau of Land Management office for further information.

CONFIDENTIAL

Operator Name: COG OPERATING LLC

Well Name: LITTLE BEAR FEDERAL COM

Well Number: 7H

Describe other minerals:

Is the proposed well in a Helium production area? N

Use Existing Well Pad? NO

New surface disturbance?

Type of Well Pad: MULTIPLE WELL

Multiple Well Pad Name:
LITTLE BEAR FEDERAL COM

Number: 3H, 7H AND 8H

Well Class: HORIZONTAL

Number of Legs:

Well Work Type: Drill

Well Type: OIL WELL

Describe Well Type:

Well sub-Type: EXPLORATORY (WILDCAT)

Describe sub-type:

Distance to town: 14 Miles

Distance to nearest well: 2935 FT

Distance to lease line: 200 FT

Reservoir well spacing assigned acres Measurement: 240 Acres

Well plat: COG_Little_Bear_7H_C102_20180417151404.pdf

Well work start Date: 07/01/2018

Duration: 30 DAYS

Section 3 - Well Location Table

Survey Type: RECTANGULAR

Describe Survey Type:

Datum: NAD83

Vertical Datum: NAVD88

Survey number:

	NS-Foot	NS Indicator	EW-Foot	EW Indicator	Twsp	Range	Section	Aliquot/Lot/Tract	Latitude	Longitude	County	State	Meridian	Lease Type	Lease Number	Elevation	MD	TVD
SHL Leg #1	696	FSL	213 7	FEL	20S	34E	33	Aliquot SWSE	32.52423 8	- 103.5635 75	LEA	NEW MEXI CO	NEW MEXI CO	F	NMNM 000008 2	380 6	0	0
KOP Leg #1	696	FSL	213 7	FEL	20S	34E	33	Aliquot SWSE	32.52423 8	- 103.5635 75	LEA	NEW MEXI CO	NEW MEXI CO	F	NMNM 000008 2	380 6	0	0
PPP Leg #1	330	FSL	165 0	FEL	20S	34E	33	Aliquot SWSE	32.52323 3	- 103.5619 93	LEA	NEW MEXI CO	NEW MEXI CO	F	NMNM 000008 2	- 135 8	520 0	516 4



U.S. Department of the Interior
BUREAU OF LAND MANAGEMENT

Application Data Report

08/08/2018

APD ID: 10400029541

Submission Date: 04/19/2018

Operator Name: COG OPERATING LLC

Well Name: LITTLE BEAR FEDERAL COM

Well Number: 7H

Well Type: OIL WELL

Well Work Type: Drill



[Show Final Text](#)

Section 1 - General

APD ID: 10400029541

Tie to previous NOS?

Submission Date: 04/19/2018

BLM Office: CARLSBAD

User: Mayte Reyes

Title: Regulatory Analyst

Federal/Indian APD: FED

Is the first lease penetrated for production Federal or Indian? FED

Lease number: NMNM0000082

Lease Acres: 600

Surface access agreement in place?

Allotted?

Reservation:

Agreement in place? NO

Federal or Indian agreement:

Agreement number:

Agreement name:

Keep application confidential? YES

Permitting Agent? NO

APD Operator: COG OPERATING LLC

Operator letter of designation:

Operator Info

Operator Organization Name: COG OPERATING LLC

Operator Address: 600 West Illinois Ave

Zip: 79701

Operator PO Box:

Operator City: Midland

State: TX

Operator Phone: (432)683-7443

Operator Internet Address: RODOM@CONCHO.COM

Section 2 - Well Information

Well in Master Development Plan? NO

Master Development Plan name:

Well in Master SUPO? NO

Master SUPO name:

Well in Master Drilling Plan? NO

Master Drilling Plan name:

Well Name: LITTLE BEAR FEDERAL COM

Well Number: 7H

Well API Number:

Field/Pool or Exploratory? Field and Pool

Field Name: WILDCAT

Pool Name: WOLFCAMP

Is the proposed well in an area containing other mineral resources? USEABLE WATER,POTASH



U.S. Department of the Interior
BUREAU OF LAND MANAGEMENT

Drilling Plan Data Report

08/08/2018

APD ID: 10400029541

Submission Date: 04/19/2018

Operator Name: COG OPERATING LLC

Well Name: LITTLE BEAR FEDERAL COM

Well Number: 7H

Well Type: OIL WELL

Well Work Type: Drill



[Show Final Text](#)

Section 1 - Geologic Formations

Formation ID	Formation Name	Elevation	True Vertical Depth	Measured Depth	Lithologies	Mineral Resources	Producing Formation
1	QUATERNARY	3806	0	0		NONE	No
2	RUSTLER	1994	1812	1812		NONE	No
3	TOP SALT	1914	1892	1892	SALT	NONE	No
4	BASE OF SALT	265	3541	3541	ANHYDRITE	NONE	No
5	YATES	124	3682	3682	LIMESTONE	OTHER : Salt Water	No
6	CAPITAN REEF	-139	3945	3945		OTHER : Salt Water	No
7	CANYON	-1842	5648	5648		NATURAL GAS,OIL	No
8	BRUSHY CANYON	-3235	7041	7041		NATURAL GAS,OIL	Yes
9	BONE SPRING LIME	-4976	8782	8782		NATURAL GAS,OIL	No
10	UPPER AVALON SHALE	-5297	9103	9103		NATURAL GAS,OIL	No
11	---	-5365	9171	9171		NATURAL GAS,OIL	No
12	BONE SPRING 1ST	-6006	9812	9812		NATURAL GAS,OIL	No
13	BONE SPRING 2ND	-6555	10361	10361	SANDSTONE	NATURAL GAS,OIL	No
14	BONE SPRING 3RD	-7342	11148	11148		NATURAL GAS,OIL	No
15	WOLFCAMP	-7691	11497	11497		NATURAL GAS,OIL	Yes

Section 2 - Blowout Prevention

Operator Name: COG OPERATING LLC

Well Name: LITTLE BEAR FEDERAL COM

Well Number: 7H

Pressure Rating (PSI): 3M

Rating Depth: 5675

Equipment: Annular. Accessories to the BOP equipment will include a Kelly cock and floor safety valve (inside BOP) and choke lines and choke manifold.

Requesting Variance? YES

Variance request: A variance is requested for the use of a flexible choke line from the BOP to the choke manifold. See attached for specs and hydrostatic test chart.

Testing Procedure: BOP/BOPE will be tested by an independent service company to 250 psi low and the high pressure indicated above per Onshore Order 2 requirements. The System may be upgraded to a higher pressure but still tested to the working pressure listed in the table above. If the system is upgraded all the components installed will be functional and tested. Pipe rams will be operationally checked each 24 hour period. Blind rams will be operationally checked on each trip out of the hole. These checks will be noted on the daily tour sheets.

Choke Diagram Attachment:

COG_Little_Bear_7H_3M_Choke_20180418070003.pdf

BOP Diagram Attachment:

COG_Little_Bear_7H_3M_BOP_20180418070015.pdf

COG_Little_Bear_7H_Flex_Hose_20180418070024.pdf

Pressure Rating (PSI): 5M

Rating Depth: 11620

Equipment: Annular, Blind Ram, Pipe Ram. Other accessories to the BOP equipment will include a Kelly cock and floor safety valve (inside BOP) and choke lines and choke manifold

Requesting Variance? YES

Variance request: A variance is requested for the use of a flexible choke line from the BOP to the choke manifold. See attached for specs and hydrostatic test chart.

Testing Procedure: BOP/BOPE will be tested by an independent service company to 250 psi low and the high pressure indicated above per Onshore Order 2 requirements. The System may be upgraded to a higher pressure but still tested to the working pressure listed in the table above. If the system is upgraded all the components installed will be functional and tested. Pipe rams will be operationally checked each 24 hour period. Blind rams will be operationally checked on each trip out of the hole. These checks will be noted on the daily tour sheets.

Choke Diagram Attachment:

COG_Little_Bear_7H_5M_Choke_20180418070054.pdf

BOP Diagram Attachment:

COG_Little_Bear_7H_5M_BOP_20180418070104.pdf

COG_Little_Bear_7H_Flex_Hose_20180418070111.pdf

Operator Name: COG OPERATING LLC

Well Name: LITTLE BEAR FEDERAL COM

Well Number: 7H

Section 3 - Casing

Casing ID	String Type	Hole Size	Csg Size	Condition	Standard	Tapered String	Top Set MD	Bottom Set MD	Top Set TVD	Bottom Set TVD	Top Set MSL	Bottom Set MSL	Calculated casing length MD	Grade	Weight	Joint Type	Collapse SF	Burst SF	Joint SF Type	Joint SF	Body SF Type	Body SF
1	SURFACE	17.5	13.375	NEW	API	N	0	1840	0	1840	-6999	-7974	1840	J-55	54.5	STC	1.34	4.23	DRY	5.13	DRY	5.13
2	INTERMEDIATE	12.25	9.625	NEW	API	N	0	5675	0	5675	-6999	-18749	5675	L-80	40	LTC	1.2	1.18	DRY	3.2	DRY	3.2
3	PRODUCTION	8.75	5.5	NEW	API	N	0	19108	0	19108	-6999	-24211	19108	P-110	17	LTC	1.24	2.18	DRY	2.25	DRY	2.25

Casing Attachments

Casing ID: 1 **String Type:** SURFACE

Inspection Document:

Spec Document:

Tapered String Spec:

Casing Design Assumptions and Worksheet(s):

COG_Little_Bear_7H_Casing_Rpt_20180418070242.pdf

Operator Name: COG OPERATING LLC

Well Name: LITTLE BEAR FEDERAL COM

Well Number: 7H

Casing Attachments

Casing ID: 2 String Type: INTERMEDIATE

Inspection Document:

Spec Document:

Tapered String Spec:

Casing Design Assumptions and Worksheet(s):

COG_Little_Bear_7H_Casing_Rpt_20180418070325.pdf

Casing ID: 3 String Type: PRODUCTION

Inspection Document:

Spec Document:

Tapered String Spec:

Casing Design Assumptions and Worksheet(s):

COG_Little_Bear_7H_Casing_Rpt_20180418070416.pdf

Section 4 - Cement

String Type	Lead/Tail	Stage Tool Depth	Top MD	Bottom MD	Quantity(sx)	Yield	Density	Cu Ft	Excess%	Cement type	Additives
SURFACE	Lead		0	1840	800	2	12.7	1600	50	Lead: 35:65:6 C Blend	As needed
SURFACE	Tail		0	1840	250	1.34	14.8	335	50	Class C	2% CaCl2
INTERMEDIATE	Lead		0	5675	310	1.98	12.7	613	50	Lead: 35:65:6 C Blend	As needed
INTERMEDIATE	Tail		0	5675	200	1.34	14.8	268	50	Tail: Class C	2% CaCl
PRODUCTION	Lead		0	1889 0	1340	2.5	11.9	3425	35	50:50:10 H Blend	As needed

Operator Name: COG OPERATING LLC

Well Name: LITTLE BEAR FEDERAL COM

Well Number: 7H

String Type	Lead/Tail	Stage Tool Depth	Top MD	Bottom MD	Quantity(sx)	Yield	Density	Cu Ft	Excess%	Cement type	Additives
PRODUCTION	Tail		0	1889 0	2200	1.24	14.4	2728	35	50:50:2 Class H Blend	As needed

Section 5 - Circulating Medium

Mud System Type: Closed

Will an air or gas system be Used? NO

Description of the equipment for the circulating system in accordance with Onshore Order #2:

Diagram of the equipment for the circulating system in accordance with Onshore Order #2:

Describe what will be on location to control well or mitigate other conditions: Sufficient mud materials to maintain mud properties and meet minimum lost circulation and weight increase requirements will be kept on location at all times.

Describe the mud monitoring system utilized: PVT/Pason/Visual Monitoring

Circulating Medium Table

Top Depth	Bottom Depth	Mud Type	Min Weight (lbs/gal)	Max Weight (lbs/gal)	Density (lbs/cu ft)	Gel Strength (lbs/100 sqft)	PH	Viscosity (CP)	Salinity (ppm)	Filtration (cc)	Additional Characteristics
1840	5675	OTHER : Saturated Brine	9.8	10.2							Saturated Brine
0	1840	OTHER : FW Gel	8.6	8.8							FW Gel
5675	1910 8	OTHER : Cut Brine	8.6	10							Cut Brine

Operator Name: COG OPERATING LLC

Well Name: LITTLE BEAR FEDERAL COM

Well Number: 7H

Section 6 - Test, Logging, Coring

List of production tests including testing procedures, equipment and safety measures:

None planned

List of open and cased hole logs run in the well:

CNL,GR

Coring operation description for the well:

None planned

Section 7 - Pressure

Anticipated Bottom Hole Pressure: 6045

Anticipated Surface Pressure: 3488.6

Anticipated Bottom Hole Temperature(F): 170

Anticipated abnormal pressures, temperatures, or potential geologic hazards? NO

Describe:

Contingency Plans geohazards description:

Contingency Plans geohazards attachment:

Hydrogen Sulfide drilling operations plan required? YES

Hydrogen sulfide drilling operations plan:

COG_Little_Bear_7H_H2S_Schem_20180418070724.pdf

COG_Little_Bear_7H_H2S_SUP_20180418070731.pdf

Section 8 - Other Information

Proposed horizontal/directional/multi-lateral plan submission:

COG_Little_Bear_7H_AC_Report_20180418070806.pdf

COG_Little_Bear_7H_Direct_Rpt_20180418070814.pdf

Other proposed operations facets description:


Other proposed operations facets attachment:


COG_Little_Bear_7H_GCP_20180418070752.pdf

COG_Little_Bear_7H_Drill_Prog_20180717141542.pdf


Other Variance attachment:

3M Choke Manifold Equipment (WITH MGS + CLOSED LOOP)

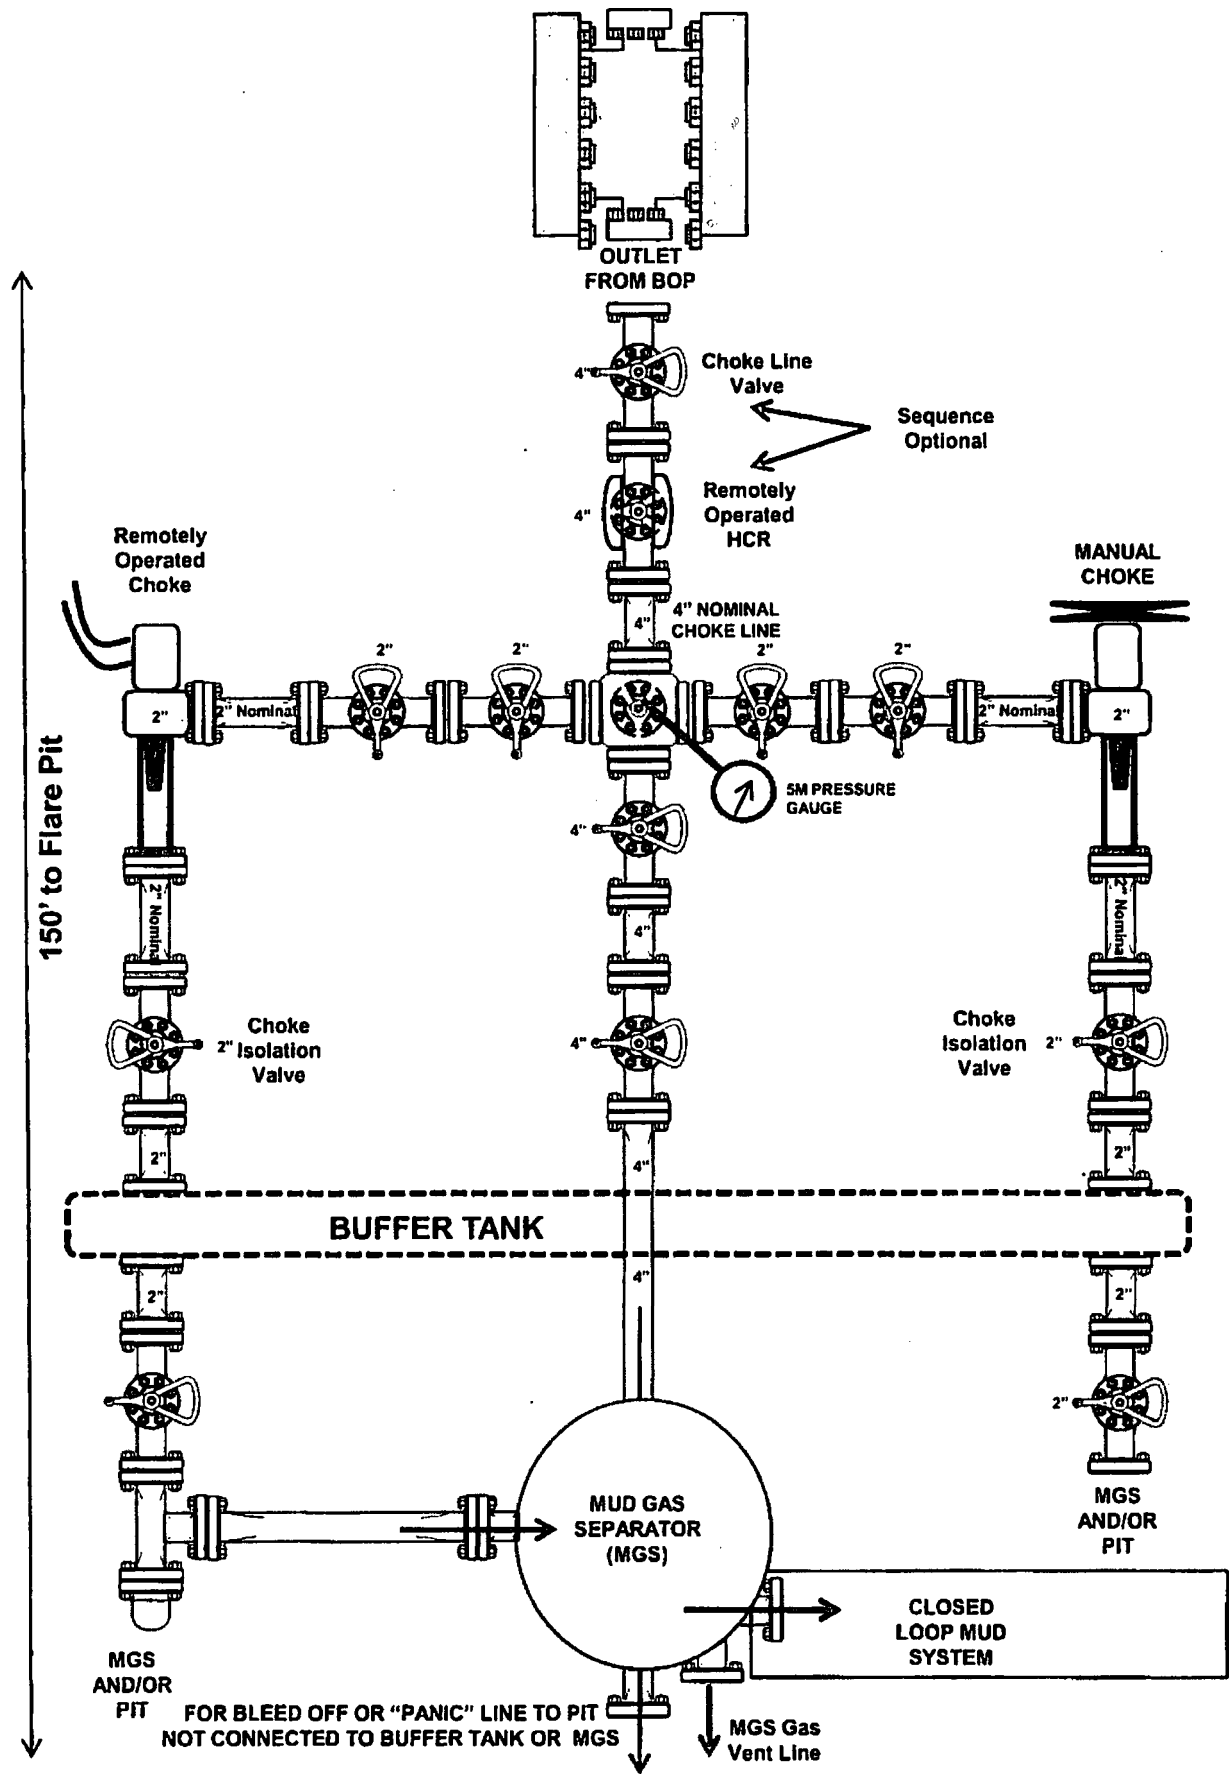


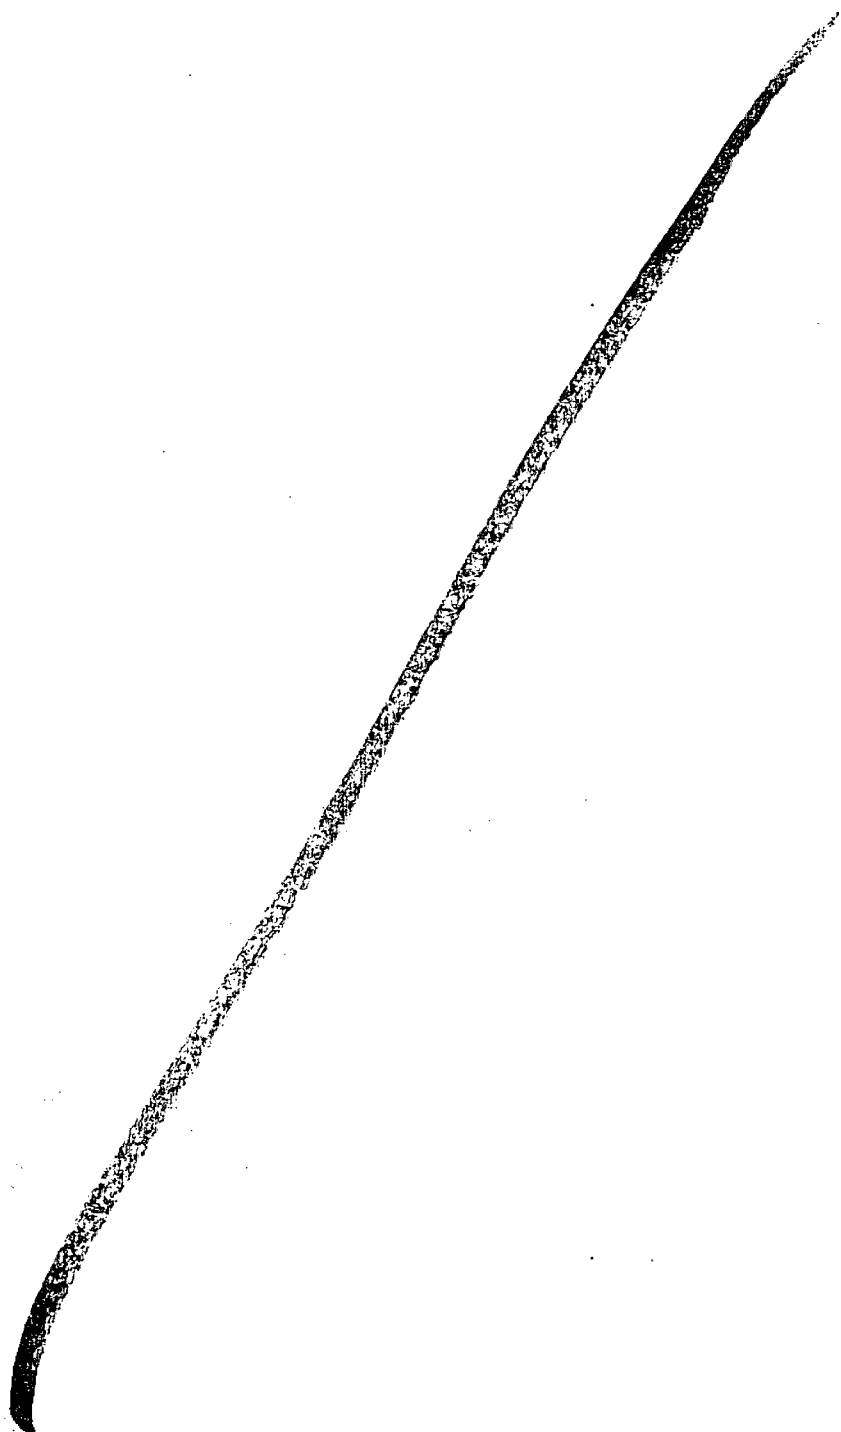

5M Choke Manifold Equipment (WITH MGS + CLOSED LOOP)

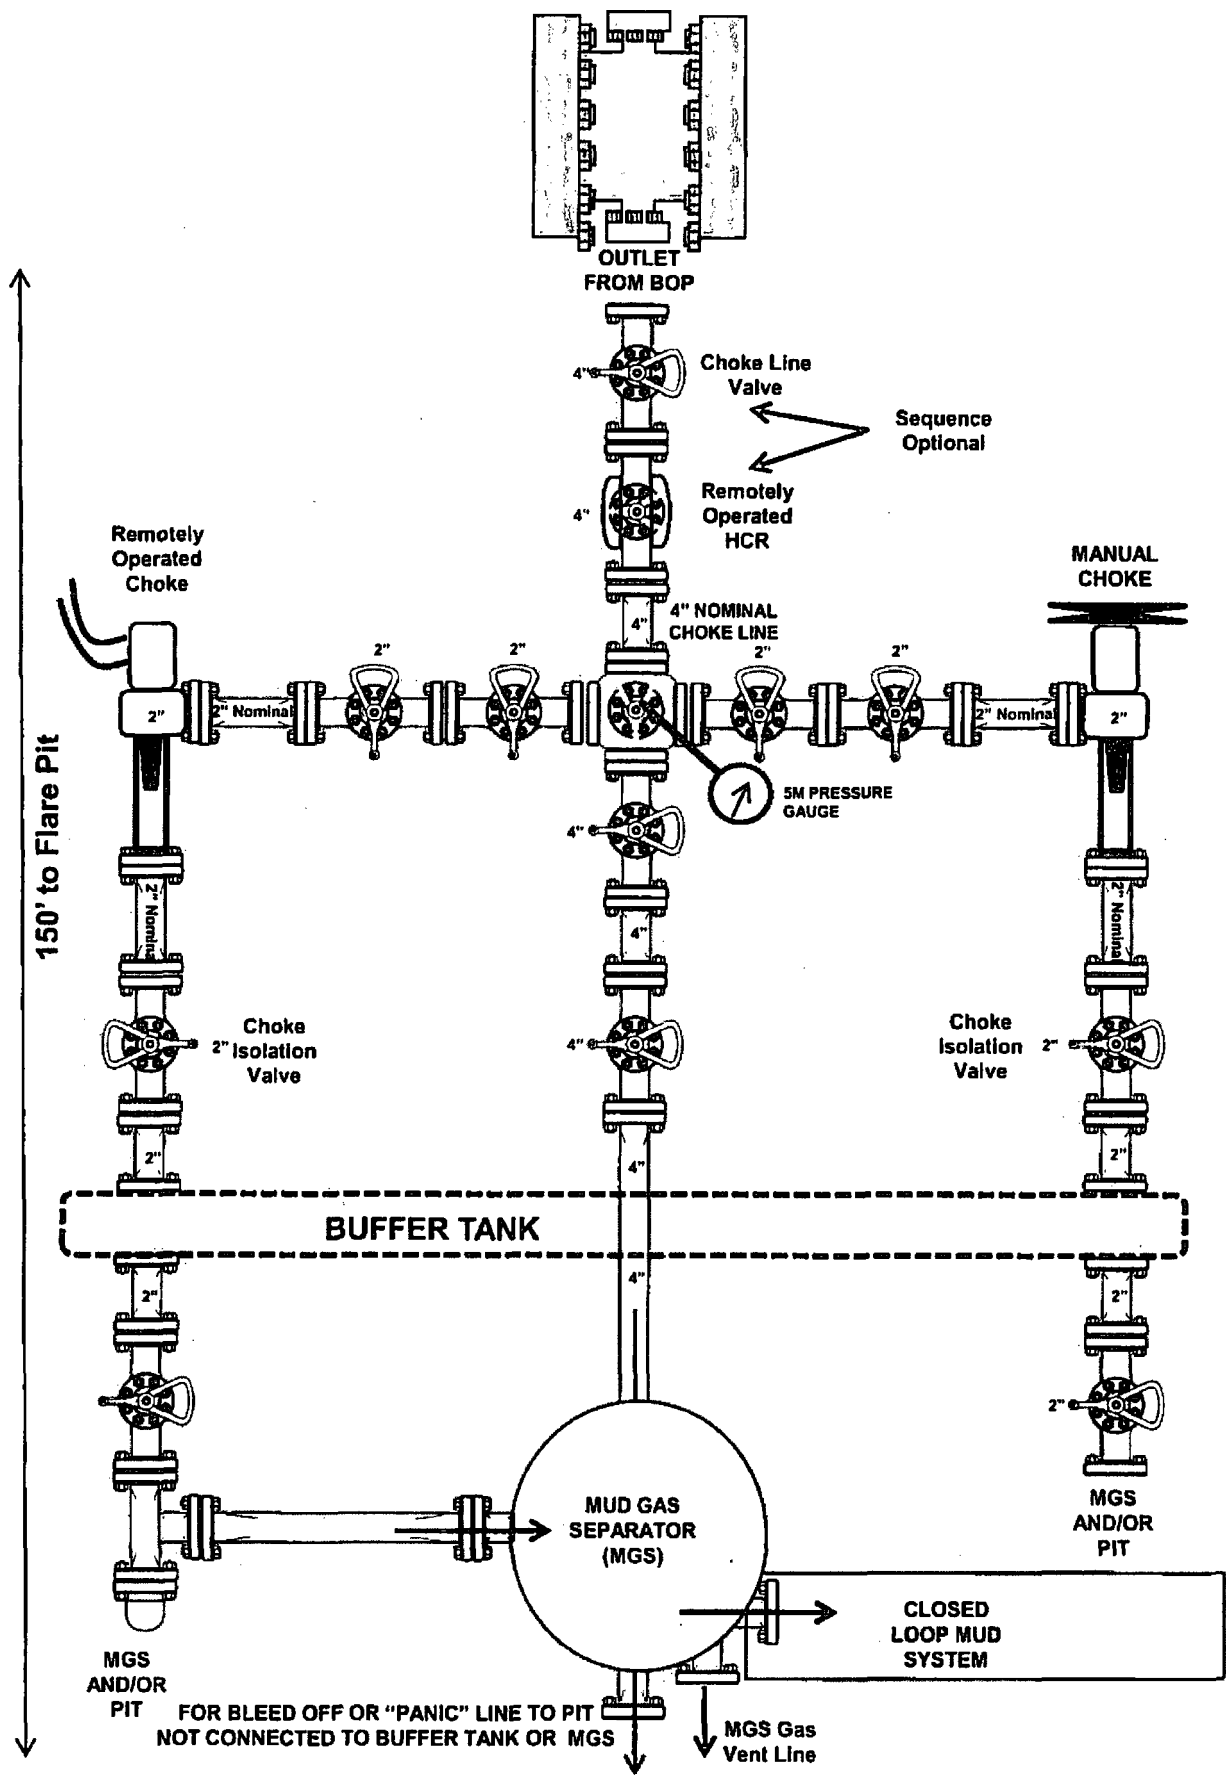

3,000 psi BOP Schematic

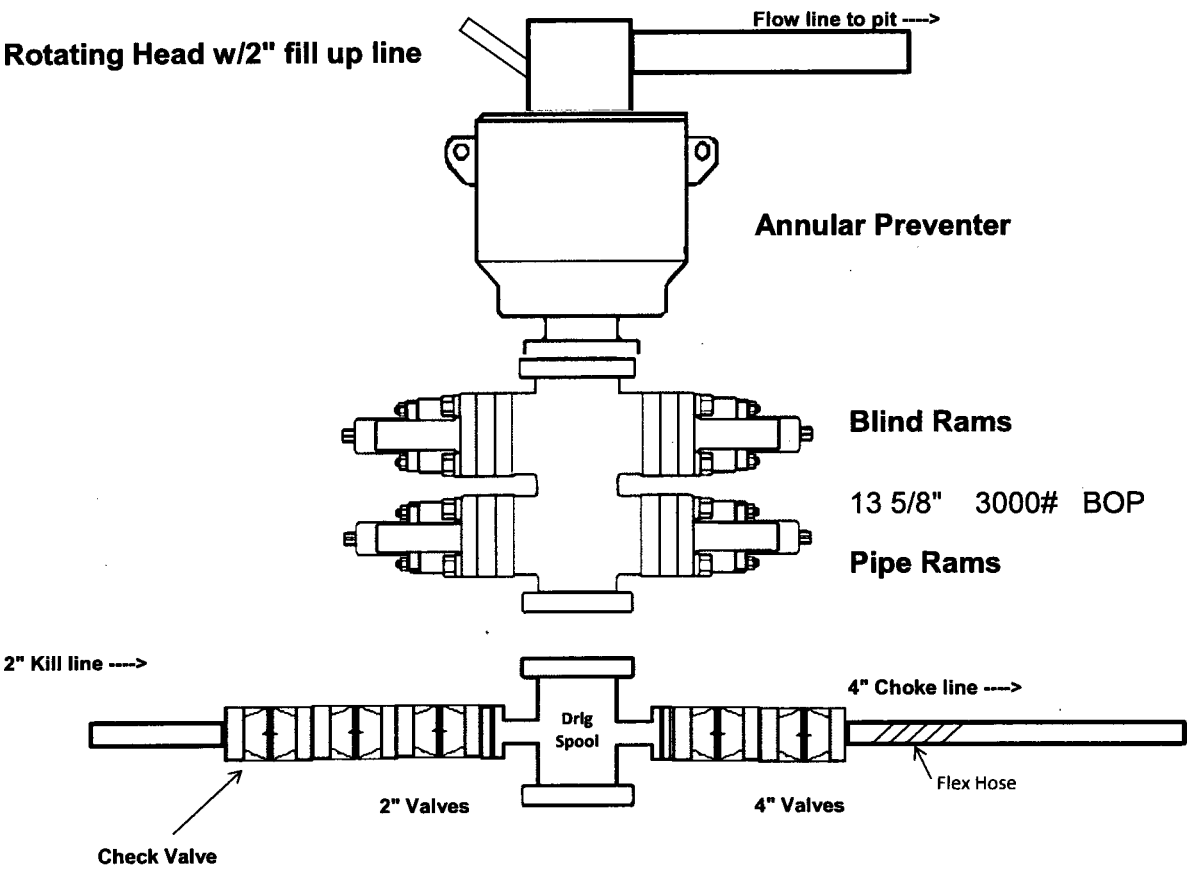



Midwest Hose
& Specialty, Inc.

Internal Hydrostatic Test Certificate

General Information		Hose Specifications	
Customer	Hobbs	Hose Assembly Type	Rotary/Vibrator
MWH Sales Representative	Ryan Rynolds	Certification	API 7K/FSL Level 2
Date Assembled	11/19/2015	Hose Grade	D
Location Assembled	OKC	Hose Working Pressure	5000
Sales Order #	271739	Hose Lot # and Date Code	11834 11/14
Customer Purchase Order #	302337	Hose I.D. (Inches)	3.5"
Assembly Serial # (Pick Ticket #)	326000	Hose O.D. (Inches)	4.89"
Hose Assembly Length	25'	Armor (yes/no)	No
Fittings			
End A		End B	
Stem (Part and Revision #)	R3.5X64WB	Stem (Part and Revision #)	R3.5X64WB
Stem (Heat #)	A144783	Stem (Heat #)	A144783
Ferrule (Part and Revision #)	RF3.5	Ferrule (Part and Revision #)	RF3.5
Ferrule (Heat #)	J1628	Ferrule (Heat #)	J1628
Connection . Flange Hammer Union Part	4-1/16 5000	Connection (Part #)	4-1/16 5000
Connection (Heat #)	14032501	Connection (Heat #)	1404H321
Nut (Part #)	N/A	Nut (Part #)	N/A
Nut (Heat #)	N/A	Nut (Heat #)	N/A
Dies Used	5.49"	Dies Used	5.49"
Hydrostatic Test Requirements			
Test Pressure (psi)	10,000	Hose assembly was tested with ambient water temperature.	
Test Pressure Hold Time (minutes)	11 1/2		
Date Tested	Tested By	Approved By	
11/19/2015			



Midwest Hose
& Specialty, Inc.

Certificate of Conformity

Customer: **Hobbs**

Customer P.O.# **302337**

Sales Order # **271739**

Date Assembled: **11/19/2015**

Specifications

Hose Assembly Type: **Rotary/Vibrator**

Assembly Serial # **326000**

Hose Lot # and Date Code **11834 11/14**

Hose Working Pressure (psi) **5000**

Test Pressure (psi) **10000**

We hereby certify that the above material supplied for the referenced purchase order to be true according to the requirements of the purchase order and current industry standards.

Supplier:

Midwest Hose & Specialty, Inc.

3312 S I-35 Service Rd

Oklahoma City, OK 73129

Comments:

Approved By

Date

Kim Thomas

11/19/2015



Midwest Hose
& Specialty, Inc.

Internal Hydrostatic Test Graph

November 19, 2015

Customer: Hobbs

Pick Ticket #: 326000

Hose Specifications

Hose Type

D

L.D.

3.5"

Length

25'

O.D.

4.89"

Working Pressure

5000 PSI

Burst Pressure

Standard Safety Multiplier Applies

Verification

Type of Fitting

4 1/16 5K

Die Size

5.49"

Hose Serial

11834

Coupling Method


Swage

Final O.D.

5.50"

Hose Assembly Serial

326000

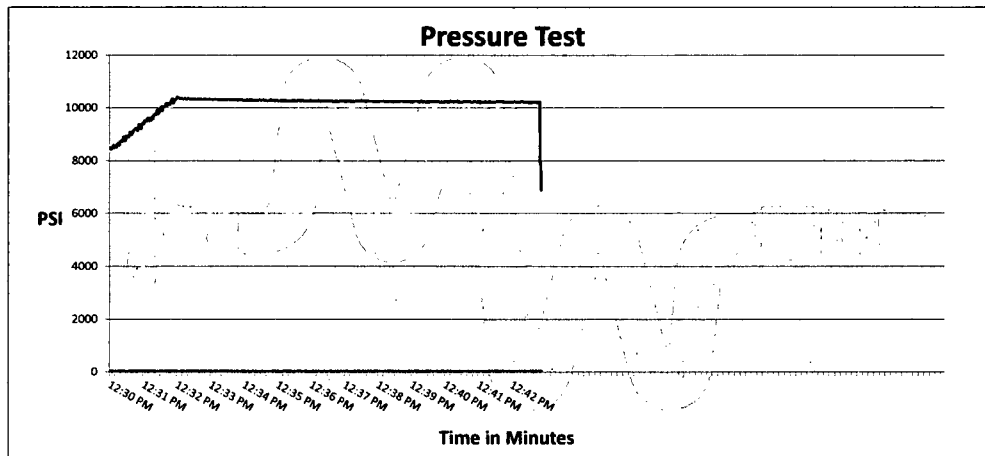

Test Pressure
10000 PSI

Time Held at Test Pressure
11 2/4 Minutes

Actual Burst Pressure

Peak Pressure
10473 PSI

Comments: Hose assembly pressure tested with water at ambient temperature.

Tested By: James Hawkins

Approved By: Kim Thomas

X _____

X _____

Hose Assembly & Test Report

General Information		Hose Specifications	
Customer	Hobbs	Hose Assembly Type	choke + K11
Date Assembled	6-26-14	Certification	APETK
Location Assembled	Dick	Hose Grade	D
Sales Order #	216297	Hose Working Pressure	5,000
Customer Purchase Order #	237512	Hose Lot #	B309
Hose Assembly Serial #	26022	Hose Date Code	04/12
Pick Ticker Line Item	0010	Hose I.D. (Inches)	3.5 inches
Hose Assembly Length (Feet and Inches)	50 feet	Hose O.D. (Inches)	5.49
Contact Information Phone #		Armor (yes/no)	yes

Fittings			
End A		End B	
Stem (Part and Revision #)	R3.5 x 64 WD	Stem (Part and Revision #)	R3.5 x 64 WD
Stem (Heat #)	13114030225	Stem (Heat #)	13114030225
Stem (Rockwell Hardness HRB #)	—	Stem (Rockwell Hardness HRB #)	—
Ferrule (Part and Revision #)	RF 3.5	Ferrule (Part and Revision #)	RF 3.5
Ferrule (Heat #)	126151	Ferrule (Heat #)	37211Y
Ferrule (Rockwell Hardness HRB #)	—	Ferrule (Rockwell Hardness HRB #)	—
Connection (Part #)	4 1/16 SK	Connection (Part #)	4 1/16 SK
Connection (Heat #)	U3360	Connection (Heat #)	U3360
Connection (Brinell Hardness HB #)	—	Connection (Brinell Hardness HB #)	—
Stress Relief #	17614	Stress Relief #	17614
Welding #	MKR	Welding #	MKR
X-ray #	—	X-ray #	—


Assembly Information			
End A		End B	
Skive O.D. (Inches)	5.04	Skive O.D. (Inches)	4.92
Swager Dies (1st pass)	5.12	Swager Dies (1st pass)	5.53
Swager Dies (2nd pass)	—	Swager Dies (2nd pass)	—
Final Swage O.D. (Inches)	5.14	Final Swage O.D. (Inches)	4.98
Compression % (See Crimp Calculator)	24%	Compression % (See Crimp Calculator)	22%
Swaged By: Charles H.			

Hydrostatic Test Requirements			
Test Pressure (psi)	10,000	Hold Time (minutes)	13 1/4
Tested By	Charles H.	Date Tested	6-26-14

This is to certify that the above Hose Assembly has been satisfactorily tested in accordance with MHSI procedure 8.2.4.2

Final Verification			
Third Party Witness 	<input checked="" type="checkbox"/> No	Hammer Unions	Yes <input checked="" type="checkbox"/> No
	<input checked="" type="checkbox"/> No	Safety Clamps	Yes <input checked="" type="checkbox"/> No
Customer or Third Party Witnessed By:			



5,000 psi BOP Schematic

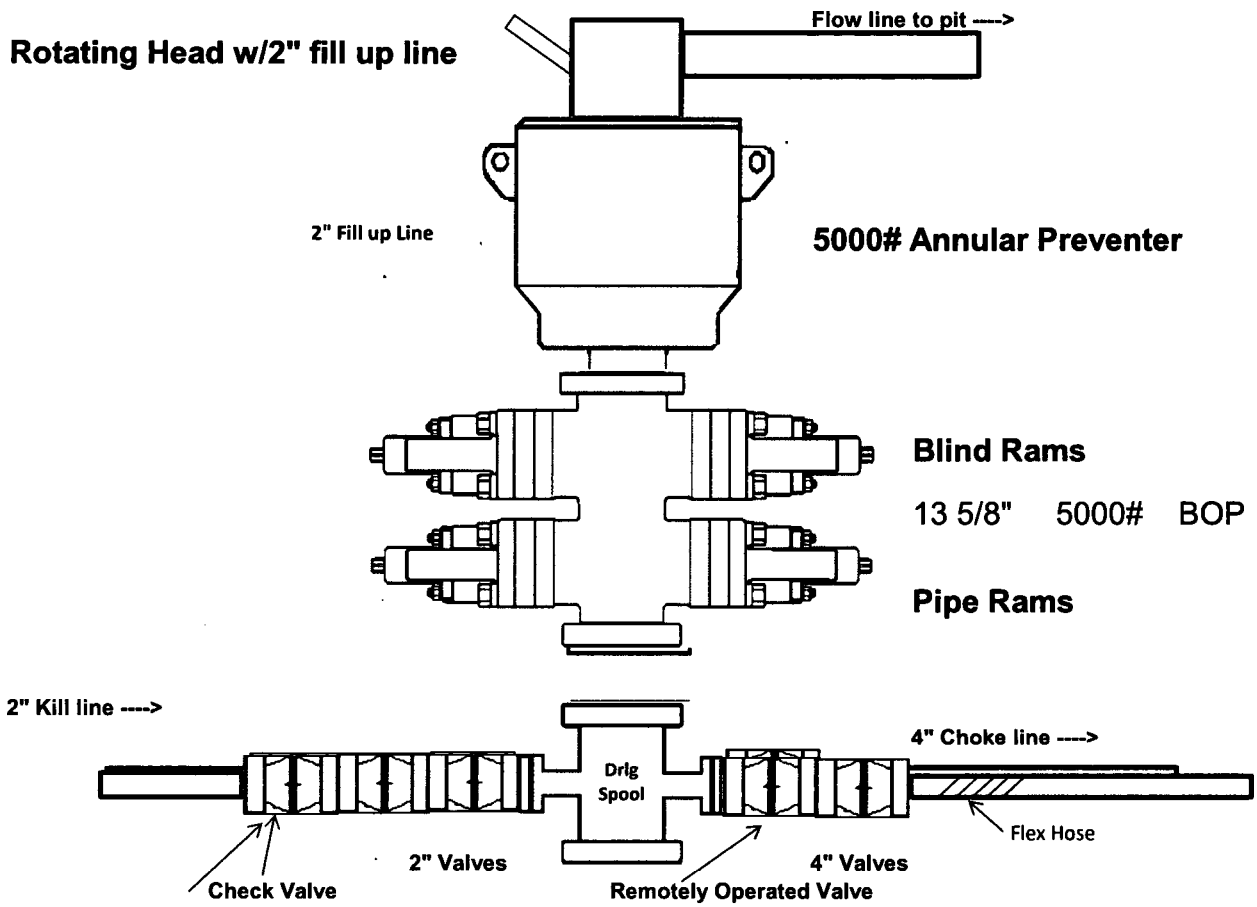



Midwest Hose
& Specialty, Inc.

Internal Hydrostatic Test Certificate

General Information		Hose Specifications	
Customer	Hobbs	Hose Assembly Type	Rotary/Vibrator
MWH Sales Representative	Ryan Rynolds	Certification	API 7K/FSL Level 2
Date Assembled	11/19/2015	Hose Grade	D
Location Assembled	OKC	Hose Working Pressure	5000
Sales Order #	271739	Hose Lot # and Date Code	11834 11/14
Customer Purchase Order #	302337	Hose I.D. (Inches)	3.5"
Assembly Serial # (Pick Ticket #)	326000	Hose O.D. (Inches)	4.89"
Hose Assembly Length	25'	Armor (yes/no)	No
Fittings			
End A		End B	
Stem (Part and Revision #)	R3.5X64WB	Stem (Part and Revision #)	R3.5X64WB
Stem (Heat #)	A144783	Stem (Heat #)	A144783
Ferrule (Part and Revision #)	RF3.5	Ferrule (Part and Revision #)	RF3.5
Ferrule (Heat #)	J1628	Ferrule (Heat #)	J1628
Connection . Flange Hammer Union Part	4-1/16 5000	Connection (Part #)	4-1/16 5000
Connection (Heat #)	14032501	Connection (Heat #)	1404H321
Nut (Part #)	N/A	Nut (Part #)	N/A
Nut (Heat #)	N/A	Nut (Heat #)	N/A
Dies Used	5.49"	Dies Used	5.49"
Hydrostatic Test Requirements			
Test Pressure (psi)	10,000	Hose assembly was tested with ambient water temperature.	
Test Pressure Hold Time (minutes)	11 1/2		
Date Tested	Tested By	Approved By	
11/19/2015			



Midwest Hose
& Specialty, Inc.

Certificate of Conformity

Customer: **Hobbs**

Customer P.O.# **302337**

Sales Order # **271739**

Date Assembled: **11/19/2015**

Specifications

Hose Assembly Type: **Rotary/Vibrator**

Assembly Serial # **326000**

Hose Lot # and Date Code **11834 11/14**

Hose Working Pressure (psi) **5000**

Test Pressure (psi) **10000**

We hereby certify that the above material supplied for the referenced purchase order to be true according to the requirements of the purchase order and current industry standards.

Supplier:

Midwest Hose & Specialty, Inc.

3312 S I-35 Service Rd

Oklahoma City, OK 73129

Comments:

Approved By

Kim Thomas

Date

11/19/2015



Internal Hydrostatic Test Graph

November 19, 2015

Customer: Hobbs


Pick Ticket #: 326000

Hose Specifications

Hose Type	Length
D	25'
I.D.	O.D.
3.5"	4.89"
Working Pressure	Burst Pressure
5000 PSI	Standard Safety Multiplier Applies

Verification

Type of Fitting	Coupling Method
4 1/16 SK	Swage
Die Size	Final O.D.
5.49"	5.50"
Hose Serial #	Hose Assembly Serial #
11834	326000

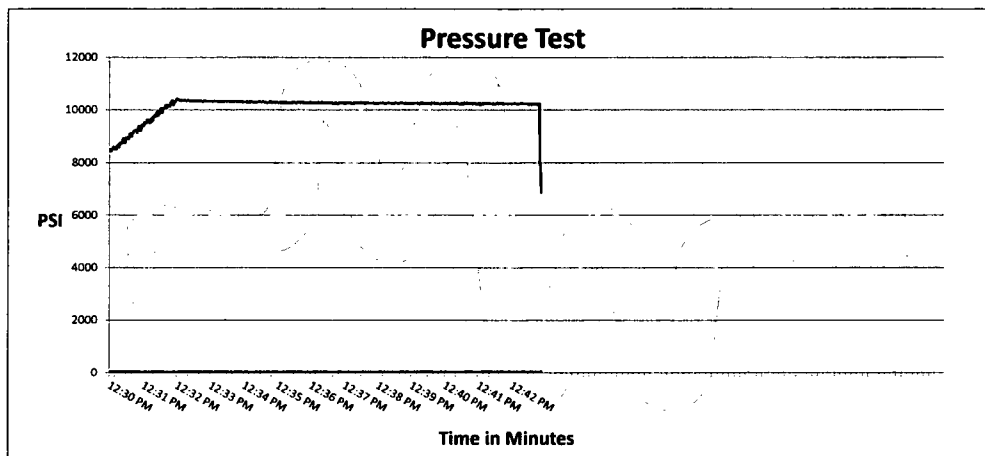

Test Pressure
10000 PSI

Time Held at Test Pressure
11 2/4 Minutes

Actual Burst Pressure

Peak Pressure
10473 PSI

Comments: Hose assembly pressure tested with water at ambient temperature.

Tested By: James Hawkins

Approved By: Kim Thomas

X

X

Hose Assembly & Test Report

General Information		Hose Specifications	
Customer	Hobbs	Hose Assembly Type	choke + K-11
Date Assembled	6-26-14	Certification	AP7K
Location Assembled	Dick	Hose Grade	D
Sales Order #	216297	Hose Working Pressure	5,000
Customer Purchase Order #	237512	Hose Lot #	B309
Hose Assembly Serial #	26022	Hose Date Code	04/12
Pick Ticket Line Item	0010	Hose I.D. (Inches)	3.5 inches
Hose Assembly Length (Feet and Inches)	50 feet	Hose O.D. (Inches)	5.49
Contact Information Phone #		Armor (yes/no)	yes

Fittings			
End A		End B	
Stem (Part and Revision #)	R3.5 x 64 WD	Stem (Part and Revision #)	R3.5 x 64 WD
Stem (Heat #)	13114030225	Stem (Heat #)	13114030225
Stem (Rockwell Hardness HRB #)	—	Stem (Rockwell Hardness HRB #)	—
Ferrule (Part and Revision #)	RF3.5	Ferrule (Part and Revision #)	RF3.5
Ferrule (Heat #)	126151	Ferrule (Heat #)	372114
Ferrule (Rockwell Hardness HRB #)	—	Ferrule (Rockwell Hardness HRB #)	—
Connection (Part #)	4 1/16 SK	Connection (Part #)	4 1/16 SK
Connection (Heat #)	U3360	Connection (Heat #)	U3360
Connection (Brinell Hardness HB #)	—	Connection (Brinell Hardness HB #)	—
Stress Relief #	17611	Stress Relief #	17614
Welding #	MKR	Welding #	MKR
X-ray #	—	X-ray #	—

Assembly Information			
End A		End B	
Skive O.D. (Inches)	5.04	Skive O.D. (Inches)	4.92
Swager Dies (1st pass)	5.62	Swager Dies (1st pass)	5.53
Swager Dies (2nd pass)	—	Swager Dies (2nd pass)	—
Final Swage O.D. (Inches)	5.64	Final Swage O.D. (Inches)	4.98
Compression % (See Crimp Calculator)	24%	Compression % (See Crimp Calculator)	22%
Swaged By	Charles Huh		

Hydrostatic Test Requirements			
Test Pressure (psi)	10,000	Hold Time (minutes)	13 1/4
Tested By	Charles Huh	Date Tested	6-26-14

This is to certify that the above Hose Assembly has been satisfactorily tested in accordance with MHSI procedure 8.2.4.2

Final Verification			
Third Party Witness	<input checked="" type="checkbox"/> No	Hammer Unions	Yes <input checked="" type="checkbox"/> No <input checked="" type="checkbox"/>
	<input checked="" type="checkbox"/> No	Safety Clamps	Yes <input checked="" type="checkbox"/> No <input checked="" type="checkbox"/>
Customer or Third Party Witnessed By:			

COG Operating, LLC - Little Bear Federal Com 7H

1. Geologic Formations

TVD of target	11,620' EOL	Pilot hole depth	NA
MD at TD:	19,108'	Deepest expected fresh water:	702'

Formation	Depth (TVD) from KB	Water/Mineral Bearing/ Target Zone?	Hazards*
Quaternary Fill	Surface	Water	
Rustler	1812	Water	
Top of Salt	1892	Salt	
Base of Salt	3541	Salt	
Yates	3682	Salt Water	
Capitan Reef	3945	Salt Water	
Base of Reef/ CYCN	5648	Oil/Gas	
Brushy Canyon	7041	Oil/Gas	
Bone Spring Lime	8782	Oil/Gas	
U. Avalon Shale	9103	Oil/Gas	
L. Avalon Shale	9171	Oil/Gas	
1st Bone Spring Sand	9812	Oil/Gas	
2nd Bone Spring Sand	10361	Oil/Gas	
3rd Bone Spring Sand	11148	Oil/Gas	
Wolfcamp	11497	Target Oil/Gas	

2. Casing Program

Hole Size	Casing Interval		Csg. Size	Weight (lbs)	Grade	Conn.	SF Collapse	SF Burst	SF Tension
	From	To							
17.5"	0	1840	13.375"	54.5	J55	STC	1.34	4.23	5.13
12.25"	0	5675	9.625"	40	L80	LTC	1.20	1.18	3.20
8.75"	0	19,108	5.5"	17	P110	LTC	1.24	2.18	2.25
BLM Minimum Safety Factor							1.125	1	1.6 Dry 1.8 Wet

Intermediate casing will be kept at least 1/3 full while running casing to mitigate collapse. Intermediate burst based on 0.7 frac gradient at the shoe with Gas Gradient 0.1 psi/ft to surface.

All casing strings will be tested in accordance with Onshore Oil and Gas Order #2 III.B.1.h

Casing Program

Hole Size	Casing Interval		Csg. Size	Weight (lbs)	Grade	Conn.	SF Collapse	SF Burst	SF Body
	From	To							
13.5"	0	975	10.75"	45.5	N80	BTC	5.54	1.20	23.44
9.875"	0	11750	7.625"	29.7	P110	BTC	1.29	1.11	3.11
6.75"	0	11250	5.5"	23	P110	BTC	1.95	2.04	3.25
6.75"	11250	17,212	5"	18	P110	BTC	1.95	2.04	3.25
BLM Minimum Safety Factor							1.125	1	1.6 Dry 1.8 Wet

Intermediate casing will be kept at least 1/3 full while running casing to mitigate collapse. Surface burst based on 0.7 frac gradient at the shoe with Gas Gradient 0.1 psi/ft to surface and
All casing strings will be tested in accordance with Onshore Oil and Gas Order #2 III.B.1.h

The 5" casing will be run back 500' into the intermediate casing to ensure the coupling OD clearance is greater than .422" for the cement bond tie in.

Casing Program

Hole Size	Casing		Csg. Size	Weight (lbs)	Grade	Conn.	SF Collapse	SF Burst	SF Tension
	From	To							
17.5"	0	875	13.375"	54.5	J55	STC	2.82	1.27	10.78
12.25"	0	4000	9.625"	40	J55	LTC	1.22	1.00	3.25
12.25"	4000	4875	9.625"	40	L80	LTC	1.21	1.45	5.73
8.75"	0	14,768	5.5"	17	P110	LTC	1.50	2.69	2.54
BLM Minimum Safety Factor							1.125	1	1.6 Dry 1.8 Wet

Intermediate casing will be kept at least 1/3 full while running casing to mitigate collapse. Intermediate burst based on 0.7 frac gradient at the shoe with Gas Gradient 0.1 psi/ft to surface.
All casing strings will be tested in accordance with Onshore Oil and Gas Order #2 III.B.1.h

Casing Program

Hole Size	Casing Interval		Csg. Size	Weight (lbs)	Grade	Conn.	SF Collapse	SF Burst	SF Tension
	From	To							
17.5"	0	1840	13.375"	54.5	J55	STC	1.34	4.23	5.13
12.25"	0	5675	9.625"	40	L80	LTC	1.20	1.18	3.20
8.75"	0	19,108	5.5"	17	P110	LTC	1.24	2.18	2.25
BLM Minimum Safety Factor							1.125	1	1.6 Dry 1.8 Wet

Intermediate casing will be kept at least 1/3 full while running casing to mitigate collapse. Intermediate burst based on 0.7 frac gradient at the shoe with Gas Gradient 0.1 psi/ft to surface.
All casing strings will be tested in accordance with Onshore Oil and Gas Order #2 III.B.1.h

Casing Program

Hole Size	Casing Interval		Csg. Size	Weight (lbs)	Grade	Conn.	SF Collapse	SF Burst	SF Tension
	From	To							
17.5"	0	1840	13.375"	54.5	J55	STC	1.34	4.23	5.13
12.25"	0	5675	9.625"	40	L80	LTC	1.20	1.18	3.20
8.75"	0	19,108	5.5"	17	P110	LTC	1.24	2.18	2.25
BLM Minimum Safety Factor							1.125	1	1.6 Dry 1.8 Wet

Intermediate casing will be kept at least 1/3 full while running casing to mitigate collapse. Intermediate burst based on 0.7 frac gradient at the shoe with Gas Gradient 0.1 psi/ft to surface.
All casing strings will be tested in accordance with Onshore Oil and Gas Order #2 III.B.1.h


Casing Program

Hole Size	Casing Interval		Csg. Size	Weight (lbs)	Grade	Conn.	SF Collapse	SF Burst	SF Tension
	From	To							
17.5"	0	1840	13.375"	54.5	J55	STC	1.34	4.23	5.13
12.25"	0	5675	9.625"	40	L80	LTC	1.20	1.18	3.20
8.75"	0	19,108	5.5"	17	P110	LTC	1.24	2.18	2.25
BLM Minimum Safety Factor							1.125	1	1.6 Dry 1.8 Wet

Intermediate casing will be kept at least 1/3 full while running casing to mitigate collapse. Intermediate burst based on 0.7 frac gradient at the shoe with Gas Gradient 0.1 psi/ft to surface.
All casing strings will be tested in accordance with Onshore Oil and Gas Order #2 III.B.1.h

COG Operating LLC
H₂S Equipment Schematic
Terrain: Shinnery sand hills.

Well pad will be 400' x 400'
with cellar in center of pad

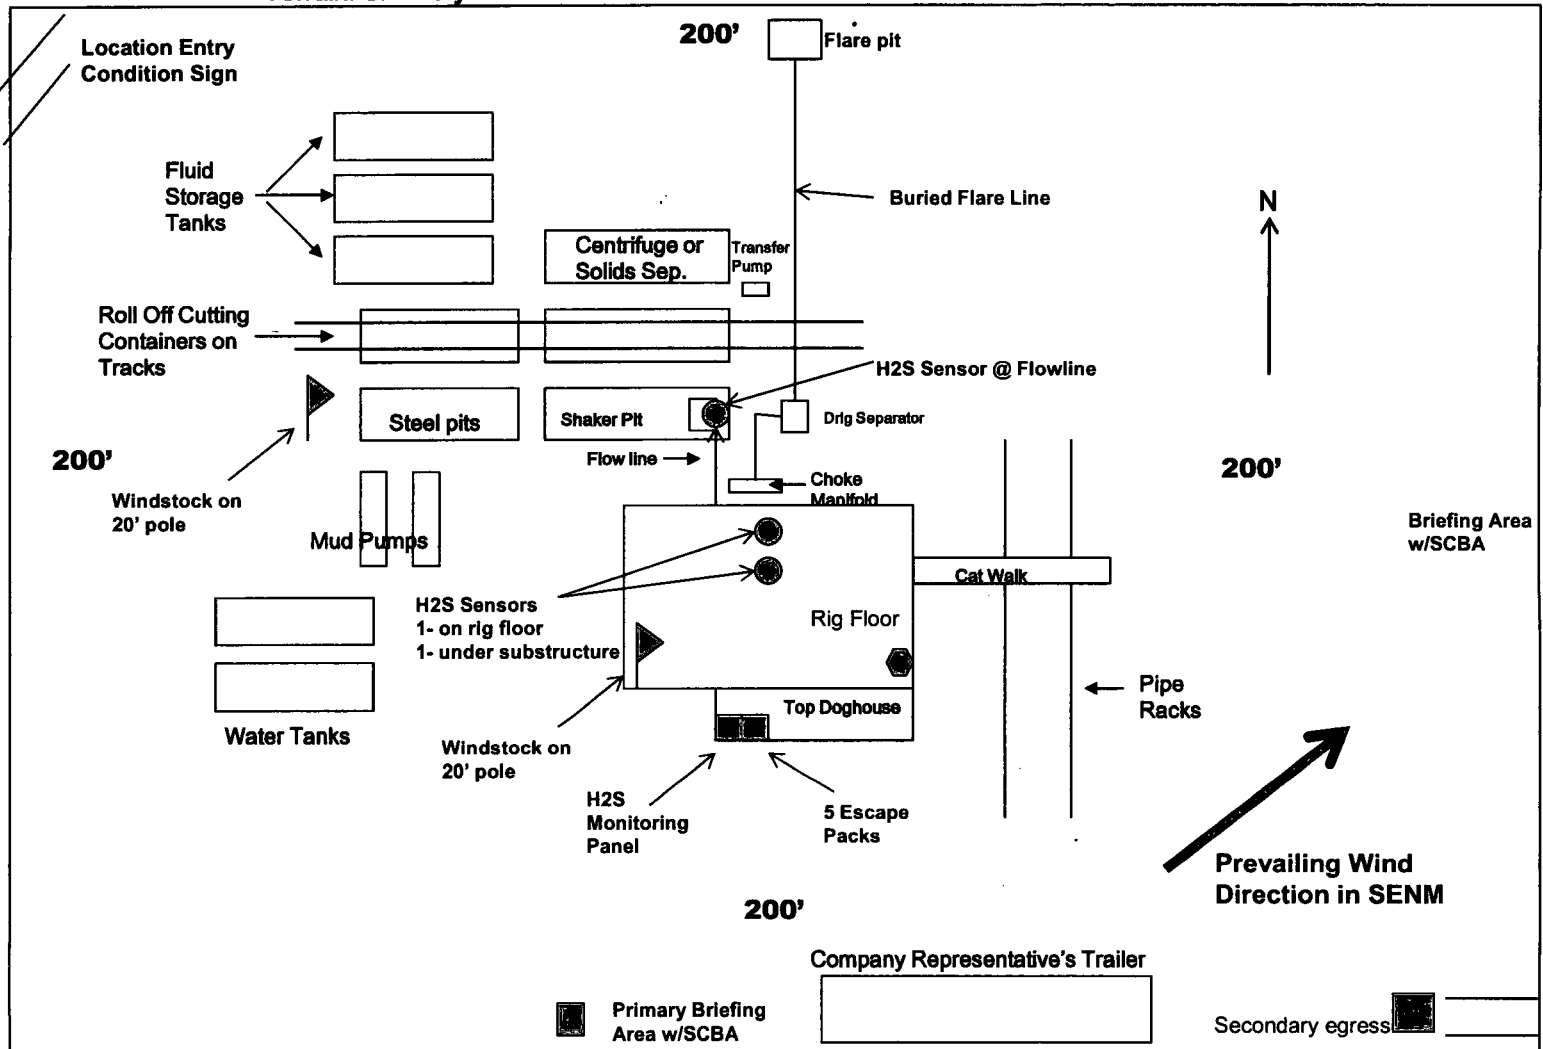

COG Operating, LLC - Little Bear Federal Com 7H

	Y or N
Is casing new? If used, attach certification as required in Onshore Order #1	Y
Does casing meet API specifications? If no, attach casing specification sheet.	Y
Is premium or uncommon casing planned? If yes attach casing specification sheet.	N
Does the above casing design meet or exceed BLM's minimum standards? If not provide justification (loading assumptions, casing design criteria).	Y
Will the intermediate pipe be kept at a minimum 1/3 fluid filled to avoid approaching the collapse pressure rating of the casing?	Y
Is well located within Capitan Reef?	Y
If yes, does production casing cement tie back a minimum of 50' above the Reef?	Y
Is well within the designated 4 string boundary?	N
Is well located in SOPA but not in R-111-P?	N
If yes, are the first 2 strings cemented to surface and 3 rd string cement tied back 500' into previous casing?	
Is well located in R-111-P and SOPA?	Y
If yes, are the first three strings cemented to surface?	Y
Is 2 nd string set 100' to 600' below the base of salt?	N
Is well located in high Cave/Karst?	N
If yes, are there two strings cemented to surface?	
(For 2 string wells) If yes, is there a contingency casing if lost circulation occurs?	
Is well located in critical Cave/Karst?	N
If yes, are there three strings cemented to surface?	

3. Cementing Program

Casing	# Sks	Wt. lb/ gal	Yld ft3/ sack	H ₂ O gal/sk	500# Comp. Strength (hours)	Slurry Description
Surf.	800	12.7	2.0	9.6	16	Lead: 35:65:6 C Blend
	250	14.8	1.34	6.34	8	Tail: Class C + 2% CaCl
Inter., Stage 1	310	12.7	1.98	10.6	16	Lead: 35:65:6 C Blend
	200	14.8	1.34	6.34	8	Tail: Class C + 2% CaCl
DV/ECP @ 3830						
Inter., Stage 2	680	12.7	2.0	10.6	16	Lead: Class C + 4% Gel + 1% CaCl ₂
	200	14.8	1.35	6.34	8	Tail: Class C + 2% CaCl
5.5 Prod	1370	11.9	2.5	19	72	Lead: 50:50:10 H Blend
	2200	14.4	1.24	5.7	19	Tail: 50:50:2 Class H Blend

Volumes Subject to Observed Hole Conditions and/or Fluid Caliper Results

Lab reports with the 500 psi compressive strength time for the cement will be onsite for review.

Casing String	TOC	% Excess
Surface	0'	50%
1 st Intermediate	0'	50%
Production	0'	35% OH in Lateral (KOP to EOL) – 40% OH in Vertical

COG Operating, LLC - Little Bear Federal Com 7H

4. Pressure Control Equipment

N	A variance is requested for the use of a diverter on the surface casing. See attached for schematic.
----------	---

BOP Installed and tested before drilling which hole?	Size?	Min. Required WP	Type	x	Tested to:
12-1/4"	13-5/8"	3M	Annular	x	1500 psi
			Blind Ram	X	3M
			Pipe Ram	X	
			Double Ram		
			Other*		
8-3/4"	13-5/8"	5M	Annular	x	50% testing pressure
			Blind Ram	x	5M
			Pipe Ram	x	
			Double Ram		
			Other*		

BOP/BOPE will be tested by an independent service company to 250 psi low and the high pressure indicated above per Onshore Order 2 requirements. The System may be upgraded to a higher pressure but still tested to the working pressure listed in the table above. If the system is upgraded all the components installed will be functional and tested.

Pipe rams will be operationally checked each 24 hour period. Blind rams will be operationally checked on each trip out of the hole. These checks will be noted on the daily tour sheets. Other accessories to the BOP equipment will include a Kelly cock and floor safety valve (inside BOP) and choke lines and choke manifold. See attached schematics.

X	Formation integrity test will be performed per Onshore Order #2. On Exploratory wells or on that portion of any well approved for a 5M BOPE system or greater, a pressure integrity test of each casing shoe shall be performed. Will be tested in accordance with Onshore Oil and Gas Order #2 III.B.1.i.
Y	A variance is requested for the use of a flexible choke line from the BOP to Choke Manifold. See attached for specs and hydrostatic test chart.
	N Are anchors required by manufacturer?
N	A multibowl wellhead is being used. The BOP will be tested per Onshore Order #2 after installation on the surface casing which will cover testing requirements for a maximum of 30 days. If any seal subject to test pressure is broken the system must be tested.

5. Mud Program

Depth		Type	Weight (ppg)	Viscosity	Water Loss
From	To				
0	Surf. Shoe	FW Gel	8.6 - 8.8	28-34	N/C
Surf csg	9-5/8" Int shoe	Saturated Brine	9.8 - 10.2	28-34	N/C
9-5/8" Int shoe	Lateral TD	Cut Brine	8.6 - 10	28-34	N/C

Sufficient mud materials to maintain mud properties and meet minimum lost circulation and weight increase requirements will be kept on location at all times.

What will be used to monitor the loss or gain of fluid?	PVT/Pason/Visual Monitoring
---	-----------------------------

6. Logging and Testing Procedures

Logging, Coring and Testing.

Y	Will run GR/CNL from TD to surface (horizontal well – vertical portion of hole). Stated logs run will be in the Completion Report and submitted to the BLM.
Y	No Logs are planned based on well control or offset log information.
N	Drill stem test? If yes, explain.
N	Coring? If yes, explain.

Additional logs planned		Interval
N	Resistivity	Pilot Hole TD to ICP
N	Density	Pilot Hole TD to ICP
Y	CBL	Production casing (If cement not circulated to surface)
Y	Mud log	Intermediate shoe to TD
N	PEX	

COG Operating, LLC - Little Bear Federal Com 7H

7. Drilling Conditions

Condition	Specify what type and where?
BH Pressure at deepest TVD	6045 psi at 11620' TVD
Abnormal Temperature	NO 170 Deg. F.

No abnormal pressure or temperature conditions are anticipated. Sufficient mud materials to maintain mud properties and weight increase requirements will be kept on location at all times.

Sufficient supplies of Paper/LCM for periodic sweeps to control seepage and losses will be maintained on location.

Hydrogen Sulfide (H₂S) monitors will be installed prior to drilling out the surface shoe. If H₂S is detected in concentrations greater than 100 ppm, the operator will comply with the provisions of Onshore Oil and Gas Order #6. If Hydrogen Sulfide is encountered, measured values and formations will be provided to the BLM.

N H₂S is present

Y H₂S Plan attached

8. Other Facets of Operation

Y	Is it a walking operation?
N	Is casing pre-set?

x	H ₂ S Plan.
x	BOP & Choke Schematics.
x	Directional Plan



U.S. Department of the Interior
BUREAU OF LAND MANAGEMENT

SUPO Data Report

08/08/2018

APD ID: 10400029541

Submission Date: 04/19/2018



Operator Name: COG OPERATING LLC

Well Name: LITTLE BEAR FEDERAL COM

Well Number: 7H

[Show Final Text](#)

Well Type: OIL WELL

Well Work Type: Drill

Section 1 - Existing Roads

Will existing roads be used? YES

Existing Road Map:

COG_Little_Bear_7H_Exist_Rd_20180417151420.pdf

Existing Road Purpose: ACCESS

Row(s) Exist? NO

ROW ID(s)

ID:

Do the existing roads need to be improved? NO

Existing Road Improvement Description:

Existing Road Improvement Attachment:

Section 2 - New or Reconstructed Access Roads

Will new roads be needed? YES

New Road Map:

COG_Little_Bear_7H_MapsPlats_20180417151433.pdf

New road type: TWO-TRACK

Length: 1584.4 Feet Width (ft.): 30

Max slope (%): 33 Max grade (%): 1

Army Corp of Engineers (ACOE) permit required? NO

ACOE Permit Number(s):

New road travel width: 14

New road access erosion control: Water will be diverted where necessary to avoid ponding, prevent erosion, maintain good drainage, and to be consistent with local drainage patterns.

New road access plan or profile prepared? NO

New road access plan attachment:

Access road engineering design? NO

Access road engineering design attachment:

Operator Name: COG OPERATING LLC

Well Name: LITTLE BEAR FEDERAL COM

Well Number: 7H

Access surfacing type: OTHER

Access topsoil source: ONSITE

Access surfacing type description: Caliche

Access onsite topsoil source depth: 6

Offsite topsoil source description:

Onsite topsoil removal process: Blading

Access other construction information: No turnouts are planned. Re-routing access road around proposed well location.

Access miscellaneous information:

Number of access turnouts:

Access turnout map:

Drainage Control

New road drainage crossing: OTHER

Drainage Control comments: None necessary.

Road Drainage Control Structures (DCS) description: None needed.

Road Drainage Control Structures (DCS) attachment:

Access Additional Attachments

Additional Attachment(s):

Section 3 - Location of Existing Wells

Existing Wells Map? YES

Attach Well map:

COG_Little_Bear_7H_1Mile_Data_20180417151447.pdf

Existing Wells description:

Section 4 - Location of Existing and/or Proposed Production Facilities

Submit or defer a Proposed Production Facilities plan? SUBMIT

Production Facilities description: Production will be sent to the proposed Little Bear Bone Spring Central Tank Battery. A tank battery and facilities will be constructed adjacent to the north side of the Little Bear Federal Com 3H, 7H and 8H as shown on the production facility layout. The tank battery and facilities will be installed according to API specifications. No flow lines are anticipated at this time.

Production Facilities map:

COG_Little_Bear_7H_Prod_Facility_20180419094534.pdf

COG_Little_Bear_7H_CTB_20180419094547.pdf

Operator Name: COG OPERATING LLC

Well Name: LITTLE BEAR FEDERAL COM

Well Number: 7H

Section 5 - Location and Types of Water Supply

Water Source Table

Water source use type: INTERMEDIATE/PRODUCTION CASING

Water source type: OTHER

Describe type: Brine H2O

Source latitude:

Source longitude:

Source datum:

Water source permit type: PRIVATE CONTRACT

Source land ownership: COMMERCIAL

Water source transport method: TRUCKING

Source transportation land ownership: COMMERCIAL

Water source volume (barrels): 22500

Source volume (acre-feet): 2.9000947

Source volume (gal): 945000

Water source use type: STIMULATION, SURFACE CASING

Water source type: OTHER

Describe type: Fresh H2O

Source latitude:

Source longitude:

Source datum:

Water source permit type: PRIVATE CONTRACT

Source land ownership: PRIVATE

Water source transport method: PIPELINE

Source transportation land ownership: PRIVATE

Water source volume (barrels): 337500

Source volume (acre-feet): 43.50142

Source volume (gal): 14175000

Water source and transportation map:

COG_Little_Bear_7H_Brine_H2O_20180419094630.pdf

COG_Little_Bear_7H_Fresh_H2O_20180419094641.pdf

Water source comments: Fresh water will be obtained from Berry Ranch/GWWS water well located in Section 34. T20S. R34E. Brine water will be obtained from the Salty Dog Brine station in Section 5. T19S. R36E.

New water well? NO

New Water Well Info

Well latitude:

Well Longitude:

Well datum:

Well target aquifer:

Est. depth to top of aquifer(ft):

Est thickness of aquifer:

Aquifer comments:

Operator Name: COG OPERATING LLC

Well Name: LITTLE BEAR FEDERAL COM

Well Number: 7H

Aquifer documentation:

Well depth (ft):

Well casing type:

Well casing outside diameter (in.):

Well casing inside diameter (in.):

New water well casing?

Used casing source:

Drilling method:

Drill material:

Grout material:

Grout depth:

Casing length (ft.):

Casing top depth (ft.):

Well Production type:

Completion Method:

Water well additional information:

State appropriation permit:

Additional information attachment:

Section 6 - Construction Materials

Construction Materials description: Caliche will be obtained from the actual well site if available. If not available onsite, or is not plentiful from the well site, caliche will be obtained from Danny Berry caliche pit located in Section 28, T20S, R34E.

Construction Materials source location attachment:

Section 7 - Methods for Handling Waste

Waste type: DRILLING

Waste content description: Drilling fluids and produced oil and water during drilling and completion operations

Amount of waste: 6000 barrels

Waste disposal frequency : One Time Only

Safe containment description: All drilling waste will be stored safely and disposed of properly

Safe containmant attachment:

Waste disposal type: HAUL TO COMMERCIAL FACILITY **Disposal location ownership:** COMMERCIAL

Disposal type description:

Disposal location description: Trucked to an approved disposal facility

Waste type: SEWAGE

Waste content description: Human waste and gray water

Amount of waste: 250 gallons

Waste disposal frequency : Weekly

Safe containment description: Waste will be properly contained and disposed of properly at a state approved disposal facility

Safe containmant attachment:

Operator Name: COG OPERATING LLC

Well Name: LITTLE BEAR FEDERAL COM

Well Number: 7H

Waste disposal type: HAUL TO COMMERCIAL FACILITY **Disposal location ownership:** COMMERCIAL

Disposal type description:

Disposal location description: Trucked to an approved disposal facility

Waste type: GARBAGE

Waste content description: Garbage and trash produced during drilling and completion operations

Amount of waste: 125 pounds

Waste disposal frequency : Weekly

Safe containment description: Garbage and trash produced during drilling and completion operations will be collected in a trash container and disposed of properly at a state approved disposal facility

Safe containmant attachment:

Waste disposal type: HAUL TO COMMERCIAL FACILITY **Disposal location ownership:** COMMERCIAL

Disposal type description:

Disposal location description: Trucked to an approved disposal facility

Reserve Pit

Reserve Pit being used? NO

Temporary disposal of produced water into reserve pit?

Reserve pit length (ft.) **Reserve pit width (ft.)**

Reserve pit depth (ft.) **Reserve pit volume (cu. yd.)**

Is at least 50% of the reserve pit in cut?

Reserve pit liner

Reserve pit liner specifications and installation description

Cuttings Area

Cuttings Area being used? NO

Are you storing cuttings on location? YES

Description of cuttings location Roll off cuttings containers on tracks

Cuttings area length (ft.) **Cuttings area width (ft.)**

Cuttings area depth (ft.) **Cuttings area volume (cu. yd.)**

Is at least 50% of the cuttings area in cut?

WCuttings area liner

Cuttings area liner specifications and installation description

Operator Name: COG OPERATING LLC

Well Name: LITTLE BEAR FEDERAL COM

Well Number: 7H

Section 8 - Ancillary Facilities

Are you requesting any Ancillary Facilities?: NO

Ancillary Facilities attachment:

Comments:

Section 9 - Well Site Layout

Well Site Layout Diagram:

COG_Little_Bear_7H_Prod_Facility_20180419094657.pdf

COG_Little_Bear_7H_CTB_20180419094706.pdf

Comments: Production will be sent to the proposed Little Bear Bone Spring Central Tank Battery. A tank battery and facilities will be constructed adjacent to the north side of the Little Bear Federal Com 3H, 7H and 8H as shown on the production facility layout. The tank battery and facilities will be installed according to API specifications. No flow lines are anticipated at this time.

Section 10 - Plans for Surface Reclamation

Type of disturbance: New Surface Disturbance

Multiple Well Pad Name: LITTLE BEAR FEDERAL COM

Multiple Well Pad Number: 3H, 7H AND 8H

Recontouring attachment:

Drainage/Erosion control construction: Approximately 400' of straw waddles will be placed on the North side to reduce sediment impacts to fragile/sensitive soils.

Drainage/Erosion control reclamation: Reclaim west side 80' and south side 80'

Well pad proposed disturbance (acres): 3.67	Well pad interim reclamation (acres): 0.15	Well pad long term disturbance (acres): 2.35
Road proposed disturbance (acres): 0.51	Road interim reclamation (acres): 0.51	Road long term disturbance (acres): 0.51
Powerline proposed disturbance (acres): 0	Powerline interim reclamation (acres): 0	Powerline long term disturbance (acres): 0
Pipeline proposed disturbance (acres): 0	Pipeline interim reclamation (acres): 0	Pipeline long term disturbance (acres): 0
Other proposed disturbance (acres): 0	Other interim reclamation (acres): 0	Other long term disturbance (acres): 0
Total proposed disturbance: 4.18	Total interim reclamation: 0.66	Total long term disturbance: 2.86

Disturbance Comments:

Reconstruction method: New construction of pad.

Topsoil redistribution: Reclaim west side 80' and south side 80'

Soil treatment: None

Operator Name: COG OPERATING LLC

Well Name: LITTLE BEAR FEDERAL COM

Well Number: 7H

Existing Vegetation at the well pad: Shinnery Oak/Mesquite grassland

Existing Vegetation at the well pad attachment:

Existing Vegetation Community at the road: Shinnery Oak/Mesquite grassland

Existing Vegetation Community at the road attachment:

Existing Vegetation Community at the pipeline: Shinnery Oak/Mesquite grassland

Existing Vegetation Community at the pipeline attachment:

Existing Vegetation Community at other disturbances: N/A

Existing Vegetation Community at other disturbances attachment:

Non native seed used? NO

Non native seed description:

Seedling transplant description:

Will seedlings be transplanted for this project? NO

Seedling transplant description attachment:

Will seed be harvested for use in site reclamation? NO

Seed harvest description:

Seed harvest description attachment:

Seed Management

Seed Table

Seed type:

Seed source:

Seed name:

Source name:

Source address:

Source phone:

Seed cultivar:

Seed use location:

PLS pounds per acre:

Proposed seeding season:

Seed Summary

Total pounds/Acre:

Seed Type	Pounds/Acre
-----------	-------------

Operator Name: COG OPERATING LLC

Well Name: LITTLE BEAR FEDERAL COM

Well Number: 7H

Seed reclamation attachment:

Operator Contact/Responsible Official Contact Info

First Name: Rand

Last Name: French

Phone: (432)254-5556

Email: rfrench@concho.com

Seedbed prep:

Seed BMP:

Seed method:

Existing invasive species? NO

Existing invasive species treatment description:

Existing invasive species treatment attachment:

Weed treatment plan description: N/A

Weed treatment plan attachment:

Monitoring plan description: N/A

Monitoring plan attachment:

Success standards: N/A

Pit closure description: N/A

Pit closure attachment:

COG_Little_Bear_7H_Closed_Loop_20180417151519.pdf

Section 11 - Surface Ownership

Disturbance type: WELL PAD

Describe:

Surface Owner: BUREAU OF LAND MANAGEMENT

Other surface owner description:

BIA Local Office:

BOR Local Office:

COE Local Office:

DOD Local Office:

NPS Local Office:

State Local Office:

Military Local Office:

Operator Name: COG OPERATING LLC

Well Name: LITTLE BEAR FEDERAL COM

Well Number: 7H

USFWS Local Office:

Other Local Office:

USFS Region:

USFS Forest/Grassland:

USFS Ranger District:

Section 12 - Other Information

Right of Way needed? NO

Use APD as ROW?

ROW Type(s):

ROW Applications

SUPO Additional Information:

Use a previously conducted onsite? YES

Previous Onsite information: Onsite completed on 2/18/2018 by Rand French (COG) and Jeff Robertson (BLM).

Other SUPO Attachment

COG_Little_Bear_7H_Certification_20180417151533.pdf

Surface Use Plan
COG Operating LLC
Little Bear Federal Com 7H
SHL: 696' FSL & 2137' FEL UL O
Section 33, T20S, R34E
BHL: 2440' FSL & 1650' FEL UL J
Section 28, T20S, R34E
Lea County, New Mexico

OPERATOR CERTIFICATION

I hereby certify that I, or persons under my direct supervision, have inspected the drill site and access road proposed herein; that I am familiar with the conditions that presently exist; that I have full knowledge of State and Federal laws applicable to this operation; that the statements made in this APD package are, to the best of my knowledge, true and correct; and that the work associated with the operations proposed herein will be performed in conformity with this APD package and the terms and conditions under which it is approved. I also certify that I, or COG Operating LLC, am responsible for the operations conducted under this application. These statements are subject to the provisions of 18 U.S.C. 1001 for the filing of false statements. Executed this 4th day of April, 2018.

Signed: Mayte Reyes

Printed Name: Mayte Reyes

Position: Regulatory Analyst

Address: 2208 W. Main Street, Artesia, NM 88210

Telephone: (575) 748-6945

E-mail: mreyes1@concho.com

Field Representative (if not above signatory): Rand French

Telephone: (575) 748-6940. E-mail: rfrench@concho.com



U.S. Department of the Interior
BUREAU OF LAND MANAGEMENT

PWD Data Report

08/08/2018

Section 1 - General

Would you like to address long-term produced water disposal? NO

Section 2 - Lined Pits

Would you like to utilize Lined Pit PWD options? NO

Produced Water Disposal (PWD) Location:

PWD surface owner:

PWD disturbance (acres):

Lined pit PWD on or off channel:

Lined pit PWD discharge volume (bbl/day):

Lined pit specifications:

Pit liner description:

Pit liner manufacturers information:

Precipitated solids disposal:

Describe precipitated solids disposal:

Precipitated solids disposal permit:

Lined pit precipitated solids disposal schedule:

Lined pit precipitated solids disposal schedule attachment:

Lined pit reclamation description:

Lined pit reclamation attachment:

Leak detection system description:

Leak detection system attachment:

Lined pit Monitor description:

Lined pit Monitor attachment:

Lined pit: do you have a reclamation bond for the pit?

Is the reclamation bond a rider under the BLM bond?

Lined pit bond number:

Lined pit bond amount:

Additional bond information attachment:

Section 3 - Unlined Pits

Would you like to utilize Unlined Pit PWD options? NO

Produced Water Disposal (PWD) Location:

PWD surface owner:

PWD disturbance (acres):

Unlined pit PWD on or off channel:

Unlined pit PWD discharge volume (bbl/day):

Unlined pit specifications:

Precipitated solids disposal:

Describe precipitated solids disposal:

Precipitated solids disposal permit:

Unlined pit precipitated solids disposal schedule:

Unlined pit precipitated solids disposal schedule attachment:

Unlined pit reclamation description:

Unlined pit reclamation attachment:

Unlined pit Monitor description:

Unlined pit Monitor attachment:

Do you propose to put the produced water to beneficial use?

Beneficial use user confirmation:

Estimated depth of the shallowest aquifer (feet):

Does the produced water have an annual average Total Dissolved Solids (TDS) concentration equal to or less than that of the existing water to be protected?

TDS lab results:

Geologic and hydrologic evidence:

State authorization:

Unlined Produced Water Pit Estimated percolation:

Unlined pit: do you have a reclamation bond for the pit?

Is the reclamation bond a rider under the BLM bond?

Unlined pit bond number:

Unlined pit bond amount:

Additional bond information attachment:

Section 4 - Injection

Would you like to utilize Injection PWD options? NO

Produced Water Disposal (PWD) Location:

PWD surface owner:

PWD disturbance (acres):

Injection PWD discharge volume (bbl/day):

Injection well mineral owner:

Injection well type:

Injection well number:

Injection well name:

Assigned injection well API number?

Injection well API number:

Injection well new surface disturbance (acres):

Minerals protection information:

Mineral protection attachment:

Underground Injection Control (UIC) Permit?

UIC Permit attachment:

Section 5 - Surface Discharge

Would you like to utilize Surface Discharge PWD options? NO

Produced Water Disposal (PWD) Location:

PWD surface owner:

PWD disturbance (acres):

Surface discharge PWD discharge volume (bbl/day):

Surface Discharge NPDES Permit?

Surface Discharge NPDES Permit attachment:

Surface Discharge site facilities information:

Surface discharge site facilities map:

Section 6 - Other

Would you like to utilize Other PWD options? NO

Produced Water Disposal (PWD) Location:

PWD surface owner:

PWD disturbance (acres):

Other PWD discharge volume (bbl/day):

Other PWD type description:

Other PWD type attachment:

Have other regulatory requirements been met?

Other regulatory requirements attachment:



**U.S. Department of the Interior
BUREAU OF LAND MANAGEMENT**

Bond Info Data Report

08/08/2018

Bond Information

Federal/Indian APD: FED

BLM Bond number: NMB000215

BIA Bond number:

Do you have a reclamation bond? NO

Is the reclamation bond a rider under the BLM bond?

Is the reclamation bond BLM or Forest Service?

BLM reclamation bond number:

Forest Service reclamation bond number:

Forest Service reclamation bond attachment:

Reclamation bond number:

Reclamation bond amount:

Reclamation bond rider amount:

Additional reclamation bond information attachment:

Operator Name: COG OPERATING LLC

Well Name: LITTLE BEAR FEDERAL COM

Well Number: 7H

	NS-Foot	NS Indicator	EW-Foot	EW Indicator	Twsp	Range	Section	Aliquot/Lot/Tract	Latitude	Longitude	County	State	Meridian	Lease Type	Lease Number	Elevation	MD	TVD
PPP Leg #1	264 0	FNL	165 0	FEL	20S	34E	33	Aliquot SWNE	32.52958 7	- 103.5619 93	LEA	NEW MEXI CO	NEW MEXI CO	F	NMNM 128368	- 770 9	144 00	115 15
EXIT Leg #1	231 0	FSL	165 0	FEL	20S	34E	28	Aliquot NWSE	32.54319 7	- 103.5620 18	LEA	NEW MEXI CO	NEW MEXI CO	F	NMNM 003925 6	- 757 2	189 98	113 78
BHL Leg #1	244 0	FSL	165 0	FEL	20S	34E	28	Aliquot NWSE	32.54355 5	- 103.5620 19	LEA	NEW MEXI CO	NEW MEXI CO	F	NMNM 003925 6	- 781 4	191 08	116 20



U.S. Department of the Interior
BUREAU OF LAND MANAGEMENT

Operator Certification Data Report

08/08/2018

Operator Certification

I hereby certify that I, or someone under my direct supervision, have inspected the drill site and access route proposed herein; that I am familiar with the conditions which currently exist; that I have full knowledge of state and Federal laws applicable to this operation; that the statements made in this APD package are, to the best of my knowledge, true and correct; and that the work associated with the operations proposed herein will be performed in conformity with this APD package and the terms and conditions under which it is approved. I also certify that I, or the company I represent, am responsible for the operations conducted under this application. These statements are subject to the provisions of 18 U.S.C. 1001 for the filing of false statements.

NAME: Mayte Reyes

Signed on: 04/17/2018

Title: Regulatory Analyst

Street Address: 2208 W Main Street

City: Artesia

State: NM

Zip: 88210

Phone: (575)748-6945

Email address: Mreyes1@concho.com

Field Representative

Representative Name: Rand French

Street Address: 2208 West Main Street

City: Artesia

State: NM

Zip: 88210

Phone: (575)748-6940

Email address: rfrench@concho.com