

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

Oil Co. Division
6226 N. French Dr.
Albuquerque, NM 88240

FORM APPROVED
Budget Bureau No. 1004-0135
Expires: March 31, 1993

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or to deepen or reentry to a different reservoir.
Use "APPLICATION FOR PERMIT-" for such proposals

SUBMIT IN TRIPLICATE

1. Type of Well

☒ Oil Well ☐ Gas Well ☐ Other

2. Name of Operator

Nearburg Producing Company

3. Address and Telephone No.

3300 North A Street, Building 2, Suite 120, Midland, Texas 79705 (915) 686-8235

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)

855' FSL and 1650' FEL, Section 3, T20S, R33E

5. Lease Designation and Serial No.
NM 17238

6. If Indian, Allottee or Tribe Name

7. If Unit or CA, Agreement Designation

8. Well Name and No.

Python 3 Federal #2

9. API Well No.

30 025 34913

10. Field and Pool, or Exploratory Area

Teas Bone Spring

11. County or Parish, State

Lea County, New Mexico

12. CHECK APPROPRIATE BOX(s) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION

- ☐ Notice of Intent
☒ Subsequent Report
☐ Final Abandonment Notice

TYPE OF ACTION


- ☐ Abandonment
☐ Recompletion
☐ Plugging Back
☐ Casing Repair
☐ Altering Casing
☒ Other Surface casing and cement
☐ Change of Plans
☐ New Construction
☐ Non-Routine Fracturing
☐ Water Shut-Off
☐ Conversion to Injection
☐ Dispose Water

(Note: Report results of multiple completion on Well Completion or Recompletion Report and Log form.)

13. Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

Spud well at 1530 hrs on 02/10/00.

02/12/00: Drilled to 1,304'. C&C hole. RU csg crew and ran 31 jts of 11-3/4" 65#, S95, BTC casing to 1,304'. Cement casing using 665 sx cement + additives. Circ 200 sx to surface. WOC 18 hrs. Cut off csg and weld on wellhead. NU BOPE and test.

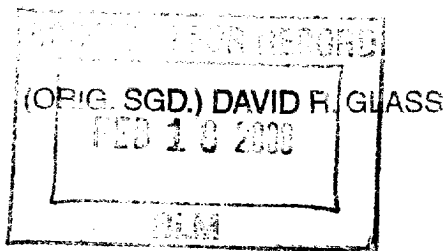

14. I hereby certify that the foregoing is true and correct

Signed Kim Stewart

Title Regulatory Analyst

Date 02/15/00

(This space for Federal or State office use)

Approved by ORIGINAL SIGNED BY CHRIS WILLIAMS
Conditions of approval, if any

Title

Date

62-111747-1