


NEW MEXICO OIL CONSERVATION COMMISSION
Santa Fe, New Mexico

DUPLICATE

MISCELLANEOUS REPORTS ON WELLS

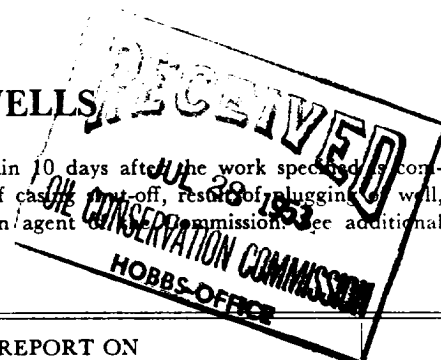

Submit this report in TRIPLICATE to the District Office, Oil Conservation Commission, within 10 days after the work specified is completed. It should be signed and filed as a report on Beginning Drilling Operations, Results of test of casing shut-off, results of plugging of well, result of well repair, and other important operations, even though the work was witnessed by an agent of the Commission. See additional instructions in the Rules and Regulations of the Commission.

Indicate Nature of Report by Checking Below

REPORT ON BEGINNING DRILLING OPERATIONS		REPORT ON RESULT OF TEST OF CASING SHUT-OFF		REPORT ON REPAIRING WELL	
REPORT ON RESULT OF PLUGGING WELL		REPORT ON RECOMPLETION OPERATION		REPORT ON (Other)	
				ACIDIZE	X

July 28, 1953
(Date)

Hobbs, New Mexico
(Place)

Following is a report on the work done and the results obtained under the heading noted above at the

Gulf Oil Corporation

(Company or Operator)

Harry Leonard "A"

(Lease)

Frank Wood Associates

(Contractor)

Well No. 30 in the NE 1/4 SW 1/4 of Sec. 33

T. 24-S, R. 38-E, NMPM., Dollarhide-West Drinkard Pool, Lea County.

The Dates of this work were as follows: July 26, 1953

Notice of intention to do the work (X) (was not) submitted on Form C-102 on _____, 19____,
(Cross out incorrect words)

and approval of the proposed plan (X) (was not) obtained.

DETAILED ACCOUNT OF WORK DONE AND RESULTS OBTAINED

Treated with 8000 gals 15% NE acid by Cardinal Chemical. 1st stage w/2000 gals. Pkrs. at 6840-6755', inj rate 84 gpm. Tubing pressure 2500#, Csg pkr 300#. Flushed w/27 bbls oil. 2nd stage w/2000 gals. pkrs at 6755-6670'. inj rate 95 gpm. Tubing pressure 2000#. Pkr 500#. Flushed w/27 bbls oil. 3rd stage w/2000 gals. pkrs 6670-6585' inj rate 85 gpm. Tubing pressure 1700#. csg pkr 500#. Flushed w/27 bbls oil. 4th stage w/2000 gals with packers at 6585-6500'. Inj rate 85 gpm. Tubing pressure 1600#. Csg pkr 500#. Flushed with 27 bbls oil.

Swabbed 27 bbls oil. Kicked off and flowed 96 bbls oil, 10 bbls acid water thru 2-3/8" tubing 3/4" choke.

Witnessed by J. F. Combs
(Name)

Gulf Oil Corporation
(Company)

Drilling Foreman
(Title)

Approved:

OIL CONSERVATION COMMISSION

I hereby certify that the information given above is true and complete to the best of my knowledge.

Name Roy J. G. Thompson

Position Asst. Area Prod. Supt.

Representing Gulf Oil Corporation

Address Box 2167, Hobbs, New Mexico

Roy J. G. Thompson
(Name)
Oil & Gas Inspector
(Title)

JUL 28 1953
(Date)