

District I

1625 N. French Dr., Hobbs, NM 88240
Phone:(575) 393-6161 Fax:(575) 393-0720

District II

811 S. First St., Artesia, NM 88210
Phone:(575) 748-1283 Fax:(575) 748-9720

District III

1000 Rio Brazos Rd., Aztec, NM 87410
Phone:(505) 334-6178 Fax:(505) 334-6170

District IV

1220 S. St Francis Dr., Santa Fe, NM 87505
Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

Form C-101
August 1, 2011

Permit 290639

APPLICATION FOR PERMIT TO DRILL, RE-ENTER, DEEPEN, PLUGBACK, OR ADD A ZONE

1. Operator Name and Address EOG RESOURCES INC P.O. Box 2267 Midland, TX 79702		2. OGRID Number 7377
		3. API Number 30-025-48243
4. Property Code 321651	5. Property Name SAVAGE 2 STATE COM	6. Well No. 745H

7. Surface Location

UL - Lot B	Section 2	Township 25S	Range 32E	Lot Idn 2	Feet From 533	N/S Line N	Feet From 2269	E/W Line E	County Lea
---------------	--------------	-----------------	--------------	--------------	------------------	---------------	-------------------	---------------	---------------

8. Proposed Bottom Hole Location

UL - Lot P	Section 2	Township 25S	Range 32E	Lot Idn P	Feet From 100	N/S Line S	Feet From 430	E/W Line E	County Lea
---------------	--------------	-----------------	--------------	--------------	------------------	---------------	------------------	---------------	---------------

9. Pool Information

WC-025 G-09 S253309P;UPR WOLFCAMP	98180
-----------------------------------	-------

Additional Well Information

11. Work Type New Well	12. Well Type OIL	13. Cable/Rotary	14. Lease Type State	15. Ground Level Elevation 3529
16. Multiple N	17. Proposed Depth 18014	18. Formation Upper Bone Spring	19. Contractor	20. Spud Date 1/15/2021
Depth to Ground water		Distance from nearest fresh water well		Distance to nearest surface water

☒ We will be using a closed-loop system in lieu of lined pits

21. Proposed Casing and Cement Program

Type	Hole Size	Casing Size	Casing Weight/ft	Setting Depth	Sacks of Cement	Estimated TOC
Surf	12.25	9.625	40	1005	390	0
Int1	8.75	7.625	29.7	11200	1670	0
Prod	6.75	5.5	17	18014	630	10700

Casing/Cement Program: Additional Comments

As a contingency EOG respectfully requests the option to use the casing and cement program described in Design B of the drill plan. The NMOCD will be notified of EOG's election at spud.

22. Proposed Blowout Prevention Program

Type	Working Pressure	Test Pressure	Manufacturer
Double Ram	5000	3000	

23. I hereby certify that the information given above is true and complete to the best of my knowledge and belief. I further certify I have complied with 19.15.14.9 (A) NMAC ☒ and/or 19.15.14.9 (B) NMAC ☒ if applicable.	OIL CONSERVATION DIVISION	
Signature:		
Printed Name: Electronically filed by Kay Maddox	Approved By: Paul F Kautz	
Title: Regulatory Agent	Title: Geologist	
Email Address: kay_maddox@eogresources.com	Approved Date: 12/28/2020	Expiration Date: 12/28/2022
Date: 12/28/2020	Phone: 432-686-3658	Conditions of Approval Attached

District I
1625 N. French Dr., Hobbs, NM 88240
Phone: (575) 393-6161 Fax: (575) 393-0720
District II
811 S. First St., Artesia, NM 88210
Phone: (575) 748-1283 Fax: (575) 748-9720
District III
1000 Rio Brazos Road, Aztec, NM 87410
Phone: (505) 334-6178 Fax: (505) 334-6170
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505
Phone: (505) 476-3460 Fax: (505) 476-3462

State of New Mexico
Energy, Minerals & Natural Resources
Department
OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

FORM C-102

Revised August 1, 2011

Submit one copy to appropriate

District Office

☐ AMENDED REPORT

WELL LOCATION AND ACREAGE DEDICATION PLAT

¹ API Number 30-025-	² Pool Code 98180	³ Pool Name WC-025 G-09 S253309P; Upper Wolfcamp
⁴ Property Code 321651	⁵ Property Name SAVAGE 2 STATE COM	⁶ Well Number 745H
⁷ OGRID No. 7377	⁸ Operator Name EOG RESOURCES, INC.	⁹ Elevation 3529'

¹⁰Surface Location


UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
2	2	25-S	32-E	-	533'	NORTH	2269'	EAST	LEA

¹¹Bottom Hole Location If Different From Surface

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
P	2	25-S	32-E	-	100'	SOUTH	430'	EAST	LEA

¹² Dedicated Acres 320.67	¹³ Joint or Infill	¹⁴ Consolidation Code	¹⁵ Order No.
--	-------------------------------	----------------------------------	-------------------------

No allowable will be assigned to this completion until all interests have been consolidated or a non-standard unit has been approved by the division.

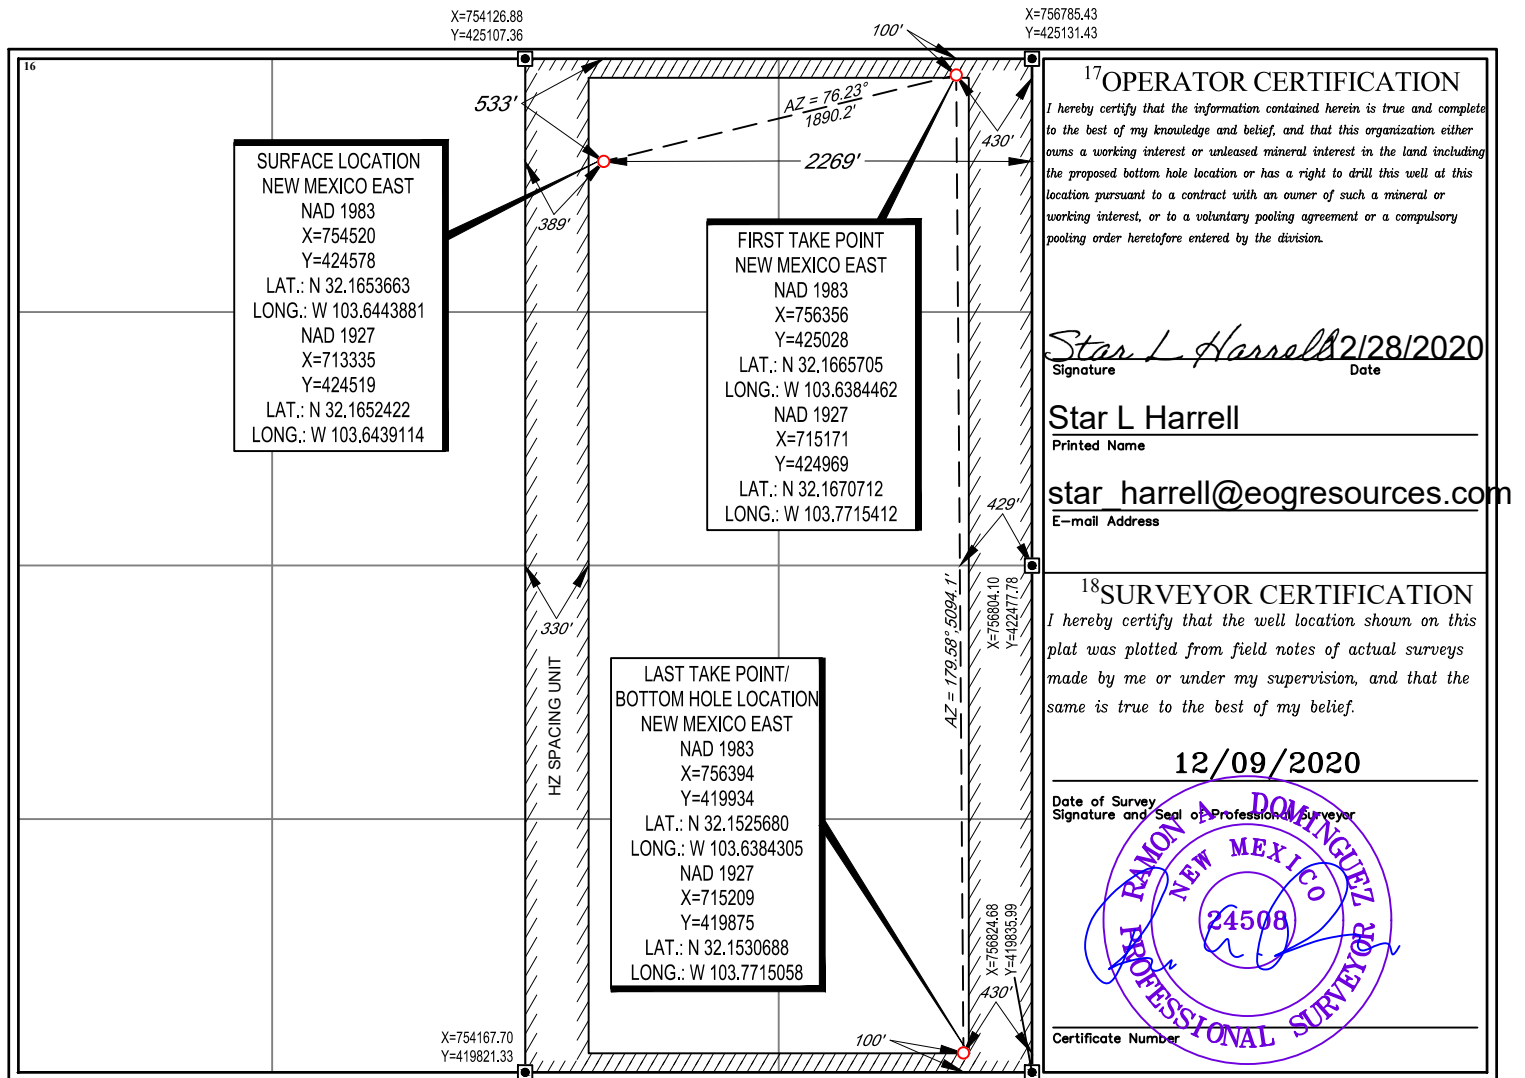

District I

1625 N. French Dr., Hobbs, NM 88240
Phone:(575) 393-6161 Fax:(575) 393-0720

District II

811 S. First St., Artesia, NM 88210
Phone:(575) 748-1283 Fax:(575) 748-9720

District III

1000 Rio Brazos Rd., Aztec, NM 87410
Phone:(505) 334-6178 Fax:(505) 334-6170

District IV

1220 S. St Francis Dr., Santa Fe, NM 87505
Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

GAS CAPTURE PLAN

Date: 12/28/2020

☒ Original

Operator & OGRID No.: [7377] EOG RESOURCES INC

☐ Amended - Reason for
Amendment:

This Gas Capture Plan outlines actions to be taken by the Operator to reduce well/production facility flaring/venting for new completion (new drill, recomplete to new zone, re-frac) activity.

Note: Form C-129 must be submitted and approved prior to exceeding 60 days allowed by Rule (Subsection A of 19.15.18.12 NMAC).

Well(s)/Production Facility – Name of facility

The well(s) that will be located at the production facility are shown in the table below.

Well Name	API	Well Location (ULSTR)	Footages	Expected MCF/D	Flared or Vented	Comments
SAVAGE 2 STATE COM #745H	30-025-48243	B-2-25S-32E	0533N 2269E	1	None	CTB already exist to EOG low pressure gathering system. MMCF/D is +/- EOG Resources, Inc. to Red Hills Compressor Station

Gathering System and Pipeline Notification

Well(s) will be connected to a production facility after flowback operations are complete, if gas transporter system is in place. The gas produced from production facility is dedicated to EOG RESOURCES INC and will be connected to EOG RESOURCES INC Low Pressure gathering system located in Lea County, New Mexico. It will require 0' of pipeline to connect the facility to Low Pressure gathering system. EOG RESOURCES INC provides (periodically) to EOG RESOURCES INC a drilling, completion and estimated first production date for wells that are scheduled to be drilled in the foreseeable future. In addition, EOG RESOURCES INC and EOG RESOURCES INC have periodic conference calls to discuss changes to drilling and completion schedules. Gas from these wells will be processed at EOG RESOURCES INC Processing Plant located in Sec. 13, Twn. 24S, Rng. 33E, Lea County, New Mexico. The actual flow of the gas will be based on compression operating parameters and gathering system pressures.

Flowback Strategy

After the fracture treatment/completion operations, well(s) will be produced to temporary production tanks and gas will be flared or vented. During flowback, the fluids and sand content will be monitored. When the produced fluids contain minimal sand, the wells will be turned to production facilities. Gas sales should start as soon as the wells start flowing through the production facilities, unless there are operational issues on EOG RESOURCES INC system at that time. Based on current information, it is EOG RESOURCES INC's belief the system can take this gas upon completion of the well(s).

Safety requirements during cleanout operations from the use of underbalanced air cleanout systems may necessitate that sand and non-pipeline quality gas be vented and/or flared rather than sold on a temporary basis.

Alternatives to Reduce Flaring

Below are alternatives considered from a conceptual standpoint to reduce the amount of gas flared.

- Power Generation – On lease
 - Only a portion of gas is consumed operating the generator, remainder of gas will be flared
- Compressed Natural Gas – On lease
 - Gas flared would be minimal, but might be uneconomical to operate when gas volume declines
- NGL Removal – On lease
 - Plants are expensive, residue gas is still flared, and uneconomical to operate when gas volume declines

District I
1625 N. French Dr., Hobbs, NM 88240
Phone:(575) 393-6161 Fax:(575) 393-0720

District II
811 S. First St., Artesia, NM 88210
Phone:(575) 748-1283 Fax:(575) 748-9720

District III
1000 Rio Brazos Rd., Aztec, NM 87410
Phone:(505) 334-6178 Fax:(505) 334-6170

District IV
1220 S. St Francis Dr., Santa Fe, NM 87505
Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

Form APD Comments

Permit 290639

PERMIT COMMENTS

Operator Name and Address: EOG RESOURCES INC [7377] P.O. Box 2267 Midland, TX 79702		API Number: 30-025-48243
		Well: SAVAGE 2 STATE COM #745H

Created By	Comment	Comment Date
------------	---------	--------------

District I

1625 N. French Dr., Hobbs, NM 88240
 Phone:(575) 393-6161 Fax:(575) 393-0720

District II

811 S. First St., Artesia, NM 88210
 Phone:(575) 748-1283 Fax:(575) 748-9720

District III

1000 Rio Brazos Rd., Aztec, NM 87410
 Phone:(505) 334-6178 Fax:(505) 334-6170

District IV

1220 S. St Francis Dr., Santa Fe, NM 87505
 Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

Form APD Conditions

Permit 290639

PERMIT CONDITIONS OF APPROVAL

Operator Name and Address: EOG RESOURCES INC [7377] P.O. Box 2267 Midland, TX 79702	API Number: 30-025-48243
	Well: SAVAGE 2 STATE COM #745H

OCD Reviewer	Condition
pkautz	Notify OCD 24 hours prior to casing & cement
pkautz	Will require a File As Drilled C-102 and a Directional Survey with the C-104
pkautz	1) SURFACE & INTERMEDIATE CASING - Cement must circulate to surface -- 2) PRODUCTION CASING - Cement must tie back into intermediate casing --
pkautz	If cement does not circulate to surface, must run temperature survey or other log to determine top of cement
pkautz	Surface casing must be set 25' below top of Rustler Anhydrite in order to seal off protectable water
pkautz	1)- The Operator is to notify NMOCD by sundry (Form C-103) within ten (10) days of the well being spud 2)- Drilling Sundries Form C-103 (Casing and Cement test are to be submitted within 10 days 3)- Completion Reports & Logs are to be submitted within 45 days 4)- Deviation / Directional Drill Survey are to be filed with or prior to C-104
pkautz	It is the operator's responsibility to monitor cancellation dates of approved APDs. APD's are good for 2 years and may be extended for one year. Only one 1 year extension will be granted if submitted by C-103 before expiration date. After expiration date or after a 1 year extension must submit new APD. If an APD expires and if site construction has occurred, site remediation is required.
pkautz	Stage Tool 1) Must notify OCD Hobbs Office prior to running Stage Tool at 5753703186 2) If using Stage Tool on Surface casing, Stage Tool must be set greater than 350' from surface and a minimum of 200 feet above surface shoe. 3) When using a Stage Tool on Intermediate or Production Casing Stage must be a minimum of 50 feet below previous casing shoe.

533' FSL
2269' FEL
Section 2
T-25-S, R-32-E

Savage 2 State Com #745H
Lea County, New Mexico

KB: 3,554'
GL: 3,529'

Proposed Wellbore
Design A

API: 30-025-*****

Bit Size: 12-1/4"


9-5/8", 40#, J-55, LTC 0' - 1,005'

Bit Size: 8-3/4"

7-5/8", 29.7#, HCP-110 , FXL @ 0' - 11,200'

Bit Size: 6-3/4"

5-1/2", 17#, HCP-110, LTC @ 0' - 18,014'

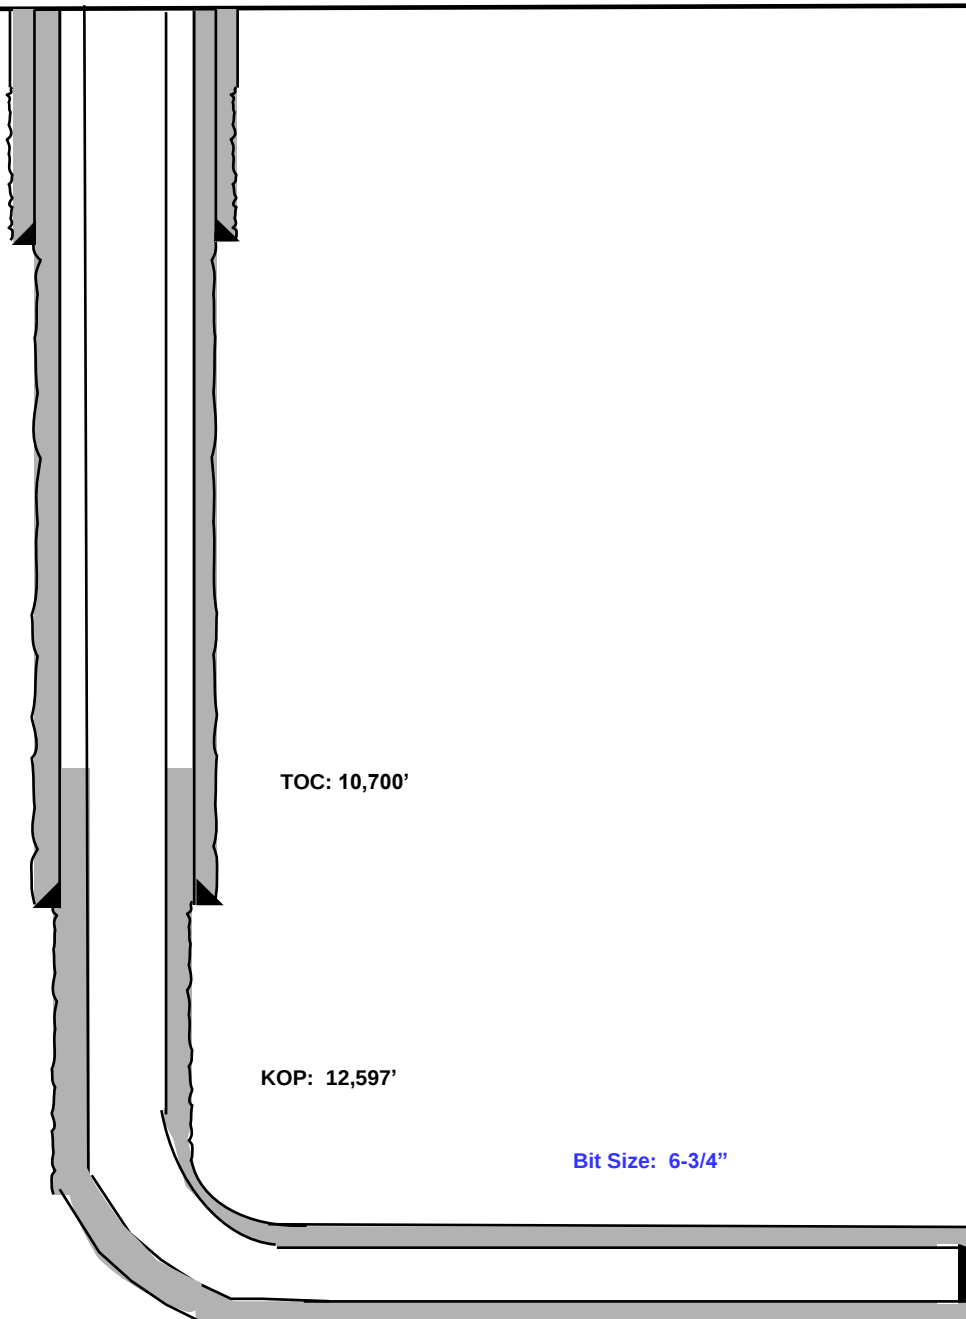

Lateral: 18,014' MD, 12,864' TVD
BH Location: 100' FSL & 430' FEL
Section 2
T-25-S, R-32-E


533' FSL
2269' FEL
Section 2
T-25-S, R-32-E

EOG RESOURCES, INC.
SAVAGE 2STATE COM #745H

KB: 3,554'
GL: 3,529'

Proposed Wellbore
Design B

API: 30-025-*****

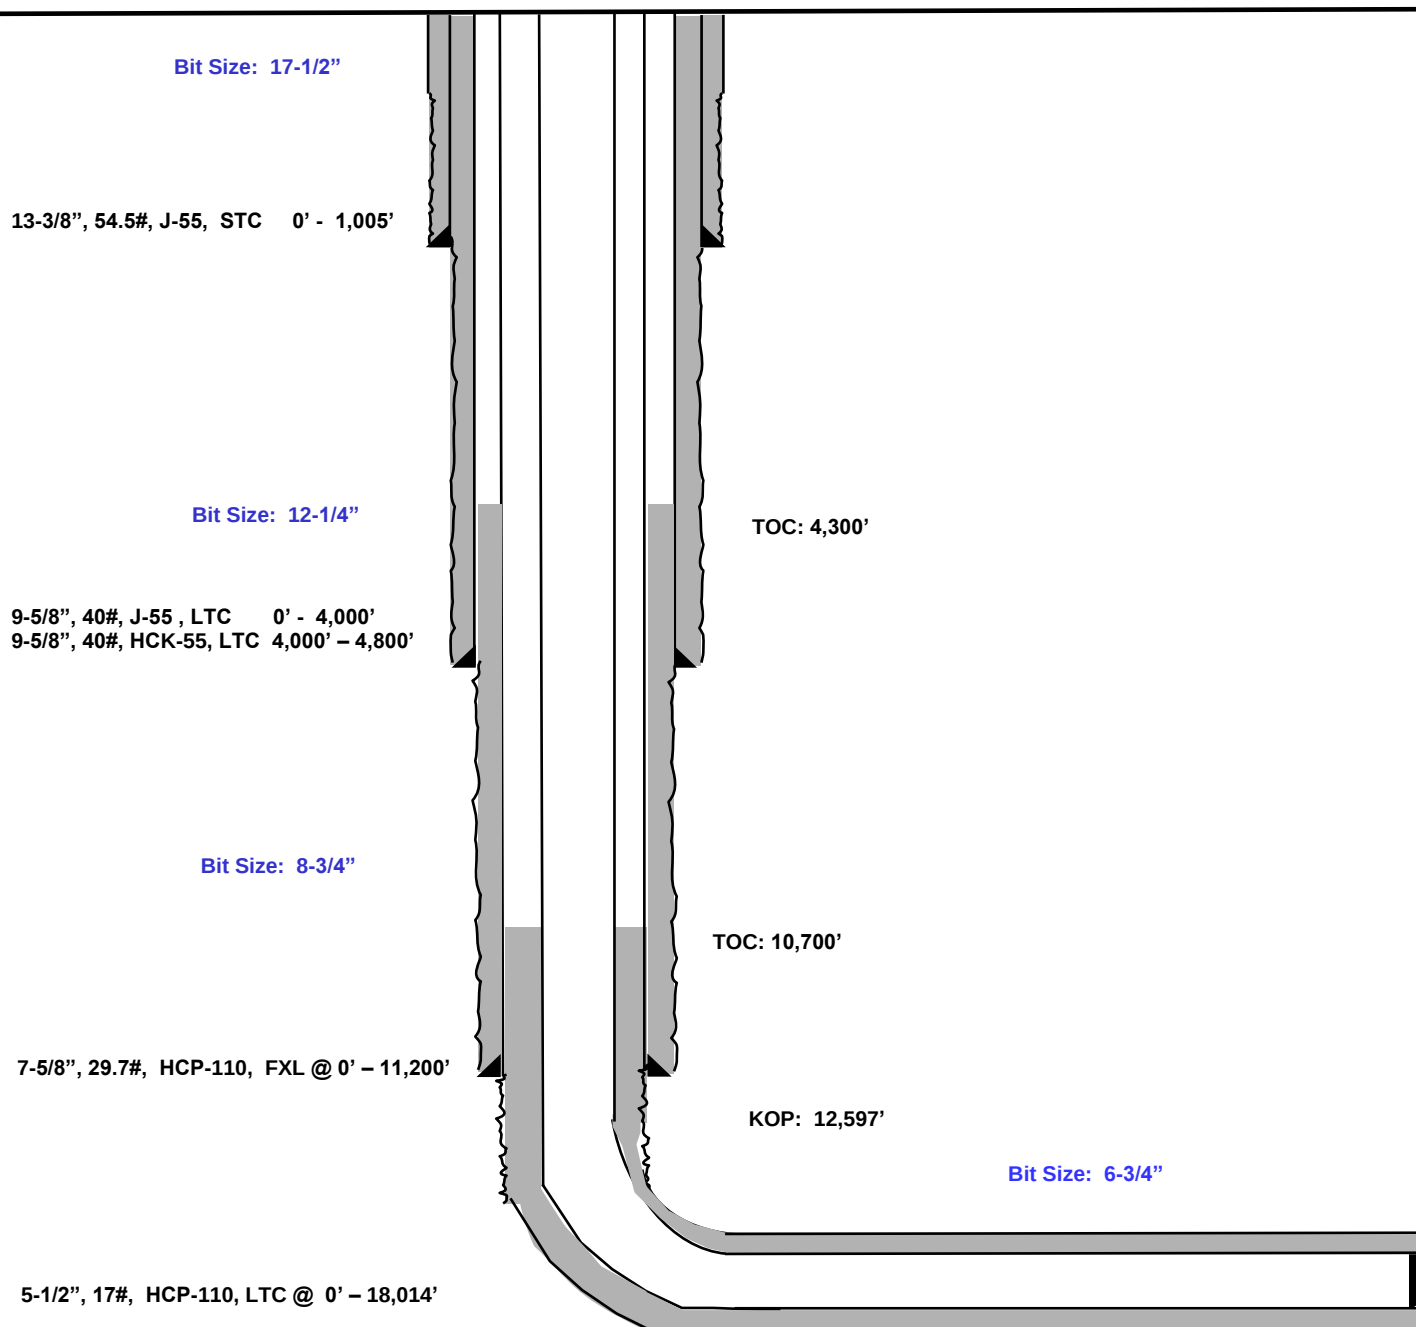

Lateral: 18,014' MD, 12,864' TVD
BH Location: 100' FSL & 430' FEL
Section 2
T-25-S, R-32-E

**EOG RESOURCES, INC.
SAVAGE 2STATE COM #745H**

Permit Information:

Well Name: Savage 2 State Com #745H

Location:

SHL: 533' FNL & 2269' FEL, Section 2, T-25-S, R-32-E, Lea Co., N.M.

BHL: 100' FSL & 430' FEL, Section 2, T-25-S, R-32-E, Lea Co., N.M.

Design A

Casing Program:

Hole Size	Interval	Csg OD	Weight	Grade	Conn	DF _{min} Collapse	DF _{min} Burst	DF _{min} Tension
12.25"	0 – 1,005'	9.625"	40#	J-55	LTC	1.125	1.25	1.60
8.75"	0' – 11,200'	7.625"	29.7#	HCP-110	FXL	1.125	1.25	1.60
6.75"	0'-18,014'	5.5"	17#	HCP-110	LTC	1.125	1.25	1.60

Cement Program:

Depth	No. Sacks	Wt. ppg	Yld Ft ³ /sk	Slurry Description
1,005'	290	13.5	1.73	Class C + 4.0% Bentonite + 0.6% CD-32 + 0.5% CaCl ₂ + 0.25 lb/sk Cello-Flake (TOC @ Surface)
	100	14.8	1.34	Class C + 0.6% FL-62 + 0.25 lb/sk Cello-Flake + 0.2% Sodium Metasilicate
11,200'	480	14.2	1.11	1 st Stage (Tail): Class C + 5% Salt + (TOC @ 7,100')
	1,190	14.8	1.5	2 nd Stage (Bradenhead squeeze): Class C + 3% Salt + 1% PreMag-M + 6% Bentonite Gel (TOC @ surface)
18,014'	630	14.2	1.31	Class H + 0.1% C-20 + 0.05% CSA-1000 + 0.20% C-49 + 0.40% C-17 (TOC @ 10,700')

Mud Program:

Depth	Type	Weight (ppg)	Viscosity	Water Loss
0 – 1,005'	Fresh - Gel	8.6-8.8	28-34	N/c
1,005' – 11,200'	Brine	8.8-10.0	28-34	N/c
11,200' – 12,597'	Oil Base	10.0-11.5	58-68	3 - 6
12,597' – 18,014' Lateral	Oil Base	10.0-11.5	58-68	3 - 6

**EOG RESOURCES, INC.
SAVAGE 2STATE COM #745H**

Design B**Casing Program:**

Hole Size	Interval	Csg OD	Weight	Grade	Conn	DF _{min} Collapse	DF _{min} Burst	DF _{min} Tension
17.5"	0 – 1,005'	13.375"	54.5#	J-55	STC	1.125	1.25	1.60
12.25"	0-4,000'	9.625"	40#	J-55	LTC	1.125	1.25	1.60
12.25"	4,000' – 4,800'	9.625"	40#	HCK-55	LTC	1.125	1.25	1.60
8.75"	0 – 11,200'	7.625"	29.7#	HCP-110	FXL	1.125	1.25	1.60
6.75"	0'–18,014'	5.5"	17#	HCP-110	LTC	1.125	1.25	1.60

Cement Program:

Depth	No. Sacks	Wt. lb/gal	Yld Ft ³ /sk	Slurry Description
1,005'	440	13.5	1.74	Lead: Class 'C' + 4.00% Bentonite + 2.00% CaCl ₂ (TOC @ Surface)
	150	14.8	1.35	Tail: Class 'C' + 0.6% FL-62 + 0.25 lb/sk Cello-Flake + 0.2% Sodium Metasilicate + 2.0% KCl (1.06 lb/sk)
4,800'	700	12.7	2.22	Lead: Class C + 0.15% C-20 + 11.63 pps Salt + 0.1% C-51 + 0.75% C-41P (TOC @ Surface)
	300	14.8	1.32	Tail: Class C + 0.13% C-20
11,200'	200	10.8	3.67	Lead: Class C + 0.40% D013 + 0.20% D046 + 0.10% D065 + 0.20% D167 (TOC @ 4,300')
	100	14.8	2.38	Tail: Class H + 94.0 pps D909 + 0.25% D065 + 0.30% D167 + 0.02% D208 + 0.15% D800
18,014'	630	14.8	1.31	Class H + 0.1% C-20 + 0.05% CSA-1000 + 0.20% C-49 + 0.40% C-17 (TOC @ 10,700')

As a contingency, EOG requests to pump a two stage cement job on the 7-5/8" intermediate casing string with the first stage being pumped conventionally with the calculated top of cement at the Brushy Canyon (7,312') and the second stage performed as a bradenhead squeeze with planned cement from the Brushy Canyon to surface. If necessary, a top out consisting of 1,000 sacks of Class C cement + 3% Salt + 1% PreMag-M + 6% Bentonite Gel (1.5 yld, 14.8 ppg) will be executed.

Mud Program:

Depth	Type	Weight (ppg)	Viscosity	Water Loss
0 – 1,005'	Fresh - Gel	8.6-8.8	28-34	N/c
1,005' – 4,800'	Brine	10.0-10.2	28-34	N/c
4,800' – 11,200'	Oil Base	8.7-9.4	58-68	N/c - 6
11,200' – 18,014' Lateral	Oil Base	10.0-11.5	58-68	3 - 6

**EOG RESOURCES, INC.
SAVAGE 2STATE COM #745H**

Hydrogen Sulfide Plan Summary

- A. All personnel shall receive proper H₂S training in accordance with Onshore Order III.C.3.a.
- B. Briefing Area: two perpendicular areas will be designated by signs and readily accessible.
- C. Required Emergency Equipment:

- Well control equipment
 - a. Flare line 150' from wellhead to be ignited by flare gun.
 - b. Choke manifold with a remotely operated choke.
 - c. Mud/gas separator

- Protective equipment for essential personnel.

Breathing apparatus:

- a. Rescue Packs (SCBA) — 1 unit shall be placed at each breathing area, 2 shall be stored in the safety trailer.
- b. Work/Escapes packs — 4 packs shall be stored on the rig floor with sufficient air hose not to restrict work activity.
- c. Emergency Escape Packs — 4 packs shall be stored in the doghouse for emergency evacuation.

Auxiliary Rescue Equipment:

- a. Stretcher
- b. Two OSHA full body harness
- c. 100 ft 5/8 inch OSHA approved rope
- d. 1-20# class ABC fire extinguisher

- H₂S detection and monitoring equipment:

The stationary detector with three sensors will be placed in the upper dog house if equipped, set to visually alarm @ 10 ppm and audible @ 14 ppm. Calibrate a minimum of every 30 days or as needed. The sensors will be placed in the following places: Rig floor / Bell nipple / End of flow line or where well bore fluid is being discharged.

(Gas sample tubes will be stored in the safety trailer)

- Visual warning systems.
 - a. One color code condition sign will be placed at the entrance to the site reflecting the possible conditions at the site.
 - b. A colored condition flag will be on display, reflecting the current condition at the site at the time.
 - c. Two wind socks will be placed in strategic locations, visible from all angles.

EOG RESOURCES, INC.
SAVAGE 2STATE COM #745H

- **Mud program:**
The mud program has been designed to minimize the volume of H₂S circulated to surface. The operator will have the necessary mud products to minimize hazards while drilling in H₂S bearing zones.
- **Metallurgy:**
All drill strings, casings, tubing, wellhead, blowout preventer, drilling spool, kill lines, choke manifold and lines, and valves shall be suitable for H₂S service.
- **Communication:**
Communication will be via cell phones and land lines where available.

**EOG RESOURCES, INC.
SAVAGE 2STATE COM #745H**

Emergency Assistance Telephone List

PUBLIC SAFETY: **911 or**

Lea County Sheriff's Department	(575) 396-3611
Rod Coffman	
Fire Department:	
Carlsbad	(575) 885-3125
Artesia	(575) 746-5050
Hospitals:	
Carlsbad	(575) 887-4121
Artesia	(575) 748-3333
Hobbs	(575) 392-1979
Dept. of Public Safety/Carlsbad	(575) 748-9718
Highway Department	(575) 885-3281
New Mexico Oil Conservation	(575) 476-3440
U.S. Dept. of Labor	(575) 887-1174

EOG Resources, Inc.

EOG / Midland	Office (432) 686-3600
---------------	-----------------------

Company Drilling Consultants:

David Dominique	Cell	(985) 518-5839
Mike Vann	Cell	(817) 980-5507

Drilling Engineer

Steve Munsell	Office	(432) 686-3609
	Cell	(432) 894-1256

Drilling Manager

Aj Dach	Office	(432) 686-3751
	Cell	(817) 480-1167

Drilling Superintendent

Jason Townsend	Office	(432) 848-9209
	Cell	(210) 776-5131

H&P Drilling

H&P Drilling	Office	(432) 563-5757
H&P 651 Drilling Rig	Rig	(903) 509-7131

Tool Pusher:

Johnathan Craig	Cell	(817) 760-6374
Brad Garrett		

Safety

Brian Chandler (HSE Manager)	Office	(432) 686-3695
	Cell	(817) 239-0251



EOG Resources - Midland

Lea County, NM (NAD 83 NME)

Savage 2 State Com

#745H

OH

Plan: Plan #1

Standard Planning Report

23 December, 2020



EOG Resources

Planning Report

Database:	EDM	Local Co-ordinate Reference:	Well #745H
Company:	EOG Resources - Midland	TVD Reference:	kb = 25' @ 3554.0usft
Project:	Lea County, NM (NAD 83 NME)	MD Reference:	kb = 25' @ 3554.0usft
Site:	Savage 2 State Com	North Reference:	Grid
Well:	#745H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OH		
Design:	Plan #1		

Project	Lea County, NM (NAD 83 NME)		
Map System:	US State Plane 1983	System Datum:	Mean Sea Level
Geo Datum:	North American Datum 1983		
Map Zone:	New Mexico Eastern Zone		

Site		Savage 2 State Com			
Site Position:		Northing:	424,469.00 usft	Latitude:	32° 9' 54.412 N
From:	Map	Easting:	751,845.00 usft	Longitude:	103° 39' 10.929 W
Position Uncertainty:	0.0 usft	Slot Radius:	13-3/16 "	Grid Convergence:	0.36 °

Well	#745H					
Well Position	+N/-S	109.0 usft	Northing:	424,578.00 usft	Latitude:	32° 9' 55.322 N
	+E/-W	2,675.0 usft	Easting:	754,520.00 usft	Longitude:	103° 38' 39.801 W
Position Uncertainty		0.0 usft	Wellhead Elevation:		Ground Level:	3,529.0 usft

Wellbore	OH				
Magnetics	Model Name	Sample Date	Declination (°)	Dip Angle (°)	Field Strength (nT)
	IGRF2020	2/6/2021	6.62	59.85	47,487.64267716

Design	Plan #1			
Audit Notes:				
Version:	Phase:	PLAN	Tie On Depth:	0.0
Vertical Section:	Depth From (TVD) (usft)	+N/-S (usft)	+E/-W (usft)	Direction (°)
	0.0	0.0	0.0	158.02

Plan Survey Tool Program	Date	12/23/2020		
Depth From (usft)	Depth To (usft)	Survey (Wellbore)	Tool Name	Remarks
1	0.0	18,013.8 Plan #1 (OH)	EOG MWD+IFR1	
			MWD + IFR1	

Plan Sections										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)	TFO (°)	Target
0.0	0.00	0.00	0.0	0.0	0.0	0.00	0.00	0.00	0.00	
1,200.0	0.00	0.00	1,200.0	0.0	0.0	0.00	0.00	0.00	0.00	
1,814.2	12.28	75.52	1,809.5	16.4	63.5	2.00	2.00	0.00	75.52	
10,596.3	12.28	75.52	10,390.5	483.6	1,872.5	0.00	0.00	0.00	0.00	
11,210.4	0.00	0.00	11,000.0	500.0	1,936.0	2.00	-2.00	0.00	180.00	
12,596.9	0.00	0.00	12,386.5	500.0	1,936.0	0.00	0.00	0.00	0.00	
12,817.4	26.46	180.00	12,599.2	450.0	1,936.0	12.00	12.00	81.65	180.00	FTP(Savage 2 State (
13,346.9	90.00	180.72	12,864.0	22.5	1,932.3	12.00	12.00	0.14	0.80	
18,013.8	90.00	180.72	12,864.0	-4,644.0	1,874.0	0.00	0.00	0.00	0.00	PBHL(Savage 2 State

EOG Resources

Planning Report



Database:	EDM	Local Co-ordinate Reference:	Well #745H
Company:	EOG Resources - Midland	TVD Reference:	kb = 25' @ 3554.0usft
Project:	Lea County, NM (NAD 83 NME)	MD Reference:	kb = 25' @ 3554.0usft
Site:	Savage 2 State Com	North Reference:	Grid
Well:	#745H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OH		
Design:	Plan #1		

Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
0.0	0.00	0.00	0.0	0.0	0.0	0.0	0.00	0.00	0.00
100.0	0.00	0.00	100.0	0.0	0.0	0.0	0.00	0.00	0.00
200.0	0.00	0.00	200.0	0.0	0.0	0.0	0.00	0.00	0.00
300.0	0.00	0.00	300.0	0.0	0.0	0.0	0.00	0.00	0.00
400.0	0.00	0.00	400.0	0.0	0.0	0.0	0.00	0.00	0.00
500.0	0.00	0.00	500.0	0.0	0.0	0.0	0.00	0.00	0.00
600.0	0.00	0.00	600.0	0.0	0.0	0.0	0.00	0.00	0.00
700.0	0.00	0.00	700.0	0.0	0.0	0.0	0.00	0.00	0.00
800.0	0.00	0.00	800.0	0.0	0.0	0.0	0.00	0.00	0.00
900.0	0.00	0.00	900.0	0.0	0.0	0.0	0.00	0.00	0.00
978.0	0.00	0.00	978.0	0.0	0.0	0.0	0.00	0.00	0.00
RSLR									
1,000.0	0.00	0.00	1,000.0	0.0	0.0	0.0	0.00	0.00	0.00
1,057.0	0.00	0.00	1,057.0	0.0	0.0	0.0	0.00	0.00	0.00
TMSK_ANHY									
1,100.0	0.00	0.00	1,100.0	0.0	0.0	0.0	0.00	0.00	0.00
1,200.0	0.00	0.00	1,200.0	0.0	0.0	0.0	0.00	0.00	0.00
1,300.0	2.00	75.52	1,300.0	0.4	1.7	0.2	2.00	2.00	0.00
1,321.0	2.42	75.52	1,321.0	0.6	2.5	0.3	2.00	2.00	0.00
TOP_SALT									
1,400.0	4.00	75.52	1,399.8	1.7	6.8	0.9	2.00	2.00	0.00
1,500.0	6.00	75.52	1,499.5	3.9	15.2	2.0	2.00	2.00	0.00
1,600.0	8.00	75.52	1,598.7	7.0	27.0	3.6	2.00	2.00	0.00
1,700.0	10.00	75.52	1,697.5	10.9	42.1	5.7	2.00	2.00	0.00
1,800.0	12.00	75.52	1,795.6	15.7	60.6	8.2	2.00	2.00	0.00
1,814.2	12.28	75.52	1,809.5	16.4	63.5	8.6	2.00	2.00	0.00
1,900.0	12.28	75.52	1,893.3	21.0	81.2	10.9	0.00	0.00	0.00
2,000.0	12.28	75.52	1,991.1	26.3	101.8	13.7	0.00	0.00	0.00
2,100.0	12.28	75.52	2,088.8	31.6	122.4	16.5	0.00	0.00	0.00
2,200.0	12.28	75.52	2,186.5	36.9	143.0	19.3	0.00	0.00	0.00
2,300.0	12.28	75.52	2,284.2	42.2	163.6	22.0	0.00	0.00	0.00
2,400.0	12.28	75.52	2,381.9	47.6	184.2	24.8	0.00	0.00	0.00
2,500.0	12.28	75.52	2,479.6	52.9	204.8	27.6	0.00	0.00	0.00
2,600.0	12.28	75.52	2,577.3	58.2	225.4	30.4	0.00	0.00	0.00
2,700.0	12.28	75.52	2,675.0	63.5	246.0	33.1	0.00	0.00	0.00
2,800.0	12.28	75.52	2,772.7	68.8	266.6	35.9	0.00	0.00	0.00
2,900.0	12.28	75.52	2,870.4	74.2	287.2	38.7	0.00	0.00	0.00
3,000.0	12.28	75.52	2,968.2	79.5	307.8	41.5	0.00	0.00	0.00
3,100.0	12.28	75.52	3,065.9	84.8	328.4	44.2	0.00	0.00	0.00
3,200.0	12.28	75.52	3,163.6	90.1	349.0	47.0	0.00	0.00	0.00
3,300.0	12.28	75.52	3,261.3	95.4	369.6	49.8	0.00	0.00	0.00
3,400.0	12.28	75.52	3,359.0	100.8	390.2	52.6	0.00	0.00	0.00
3,500.0	12.28	75.52	3,456.7	106.1	410.8	55.3	0.00	0.00	0.00
3,599.6	12.28	75.52	3,554.0	111.4	431.3	58.1	0.00	0.00	0.00
3,600.0	12.28	75.52	3,554.4	111.4	431.4	58.1	0.00	0.00	0.00
3,700.0	12.28	75.52	3,652.1	116.7	452.0	60.9	0.00	0.00	0.00
3,800.0	12.28	75.52	3,749.8	122.0	472.6	63.7	0.00	0.00	0.00
3,900.0	12.28	75.52	3,847.6	127.4	493.2	66.4	0.00	0.00	0.00
4,000.0	12.28	75.52	3,945.3	132.7	513.8	69.2	0.00	0.00	0.00
4,100.0	12.28	75.52	4,043.0	138.0	534.4	72.0	0.00	0.00	0.00
4,200.0	12.28	75.52	4,140.7	143.3	555.0	74.8	0.00	0.00	0.00
4,300.0	12.28	75.52	4,238.4	148.6	575.5	77.5	0.00	0.00	0.00
4,400.0	12.28	75.52	4,336.1	154.0	596.1	80.3	0.00	0.00	0.00

EOG Resources

Planning Report



Database:	EDM	Local Co-ordinate Reference:	Well #745H
Company:	EOG Resources - Midland	TVD Reference:	kb = 25' @ 3554.0usft
Project:	Lea County, NM (NAD 83 NME)	MD Reference:	kb = 25' @ 3554.0usft
Site:	Savage 2 State Com	North Reference:	Grid
Well:	#745H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OH		
Design:	Plan #1		

Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
4,500.0	12.28	75.52	4,433.8	159.3	616.7	83.1	0.00	0.00	0.00
4,600.0	12.28	75.52	4,531.5	164.6	637.3	85.9	0.00	0.00	0.00
4,700.0	12.28	75.52	4,629.2	169.9	657.9	88.6	0.00	0.00	0.00
4,764.2	12.28	75.52	4,692.0	173.3	671.2	90.4	0.00	0.00	0.00
BASE_SALT									
4,800.0	12.28	75.52	4,727.0	175.2	678.5	91.4	0.00	0.00	0.00
4,900.0	12.28	75.52	4,824.7	180.6	699.1	94.2	0.00	0.00	0.00
4,997.6	12.28	75.52	4,920.0	185.8	719.2	96.9	0.00	0.00	0.00
LMAR									
5,000.0	12.28	75.52	4,922.4	185.9	719.7	97.0	0.00	0.00	0.00
5,027.2	12.28	75.52	4,949.0	187.3	725.4	97.7	0.00	0.00	0.00
BLCN									
5,100.0	12.28	75.52	5,020.1	191.2	740.3	99.7	0.00	0.00	0.00
5,200.0	12.28	75.52	5,117.8	196.5	760.9	102.5	0.00	0.00	0.00
5,300.0	12.28	75.52	5,215.5	201.8	781.5	105.3	0.00	0.00	0.00
5,400.0	12.28	75.52	5,313.2	207.2	802.1	108.1	0.00	0.00	0.00
5,500.0	12.28	75.52	5,410.9	212.5	822.7	110.8	0.00	0.00	0.00
5,600.0	12.28	75.52	5,508.6	217.8	843.3	113.6	0.00	0.00	0.00
5,700.0	12.28	75.52	5,606.3	223.1	863.9	116.4	0.00	0.00	0.00
5,800.0	12.28	75.52	5,704.1	228.4	884.5	119.2	0.00	0.00	0.00
5,900.0	12.28	75.52	5,801.8	233.8	905.1	121.9	0.00	0.00	0.00
5,941.2	12.28	75.52	5,842.0	236.0	913.6	123.1	0.00	0.00	0.00
CYCN									
6,000.0	12.28	75.52	5,899.5	239.1	925.7	124.7	0.00	0.00	0.00
6,100.0	12.28	75.52	5,997.2	244.4	946.3	127.5	0.00	0.00	0.00
6,200.0	12.28	75.52	6,094.9	249.7	966.9	130.3	0.00	0.00	0.00
6,300.0	12.28	75.52	6,192.6	255.0	987.5	133.0	0.00	0.00	0.00
6,400.0	12.28	75.52	6,290.3	260.4	1,008.1	135.8	0.00	0.00	0.00
6,500.0	12.28	75.52	6,388.0	265.7	1,028.7	138.6	0.00	0.00	0.00
6,600.0	12.28	75.52	6,485.7	271.0	1,049.3	141.4	0.00	0.00	0.00
6,700.0	12.28	75.52	6,583.5	276.3	1,069.9	144.1	0.00	0.00	0.00
6,800.0	12.28	75.52	6,681.2	281.6	1,090.5	146.9	0.00	0.00	0.00
6,900.0	12.28	75.52	6,778.9	287.0	1,111.1	149.7	0.00	0.00	0.00
7,000.0	12.28	75.52	6,876.6	292.3	1,131.7	152.5	0.00	0.00	0.00
7,100.0	12.28	75.52	6,974.3	297.6	1,152.3	155.2	0.00	0.00	0.00
7,200.0	12.28	75.52	7,072.0	302.9	1,172.9	158.0	0.00	0.00	0.00
7,300.0	12.28	75.52	7,169.7	308.2	1,193.5	160.8	0.00	0.00	0.00
7,400.0	12.28	75.52	7,267.4	313.6	1,214.1	163.6	0.00	0.00	0.00
7,445.6	12.28	75.52	7,312.0	316.0	1,223.5	164.8	0.00	0.00	0.00
BYCN									
7,500.0	12.28	75.52	7,365.1	318.9	1,234.7	166.3	0.00	0.00	0.00
7,600.0	12.28	75.52	7,462.9	324.2	1,255.3	169.1	0.00	0.00	0.00
7,700.0	12.28	75.52	7,560.6	329.5	1,275.9	171.9	0.00	0.00	0.00
7,800.0	12.28	75.52	7,658.3	334.8	1,296.5	174.7	0.00	0.00	0.00
7,900.0	12.28	75.52	7,756.0	340.2	1,317.1	177.4	0.00	0.00	0.00
8,000.0	12.28	75.52	7,853.7	345.5	1,337.7	180.2	0.00	0.00	0.00
8,100.0	12.28	75.52	7,951.4	350.8	1,358.3	183.0	0.00	0.00	0.00
8,200.0	12.28	75.52	8,049.1	356.1	1,378.9	185.8	0.00	0.00	0.00
8,300.0	12.28	75.52	8,146.8	361.4	1,399.5	188.5	0.00	0.00	0.00
8,400.0	12.28	75.52	8,244.5	366.8	1,420.1	191.3	0.00	0.00	0.00
8,500.0	12.28	75.52	8,342.3	372.1	1,440.7	194.1	0.00	0.00	0.00
8,600.0	12.28	75.52	8,440.0	377.4	1,461.3	196.9	0.00	0.00	0.00
8,700.0	12.28	75.52	8,537.7	382.7	1,481.9	199.6	0.00	0.00	0.00
8,800.0	12.28	75.52	8,635.4	388.0	1,502.5	202.4	0.00	0.00	0.00

EOG Resources

Planning Report



Database:	EDM	Local Co-ordinate Reference:	Well #745H
Company:	EOG Resources - Midland	TVD Reference:	kb = 25' @ 3554.0usft
Project:	Lea County, NM (NAD 83 NME)	MD Reference:	kb = 25' @ 3554.0usft
Site:	Savage 2 State Com	North Reference:	Grid
Well:	#745H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OH		
Design:	Plan #1		

Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
8,900.0	12.28	75.52	8,733.1	393.4	1,523.1	205.2	0.00	0.00	0.00
9,000.0	12.28	75.52	8,830.8	398.7	1,543.7	208.0	0.00	0.00	0.00
9,014.5	12.28	75.52	8,845.0	399.5	1,546.7	208.4	0.00	0.00	0.00
BSGL									
9,100.0	12.28	75.52	8,928.5	404.0	1,564.3	210.7	0.00	0.00	0.00
9,149.6	12.28	75.52	8,977.0	406.6	1,574.5	212.1	0.00	0.00	0.00
LNRD_A									
9,200.0	12.28	75.52	9,026.2	409.3	1,584.9	213.5	0.00	0.00	0.00
9,300.0	12.28	75.52	9,123.9	414.6	1,605.5	216.3	0.00	0.00	0.00
9,400.0	12.28	75.52	9,221.6	420.0	1,626.1	219.1	0.00	0.00	0.00
9,500.0	12.28	75.52	9,319.4	425.3	1,646.7	221.8	0.00	0.00	0.00
9,544.7	12.28	75.52	9,363.0	427.7	1,655.9	223.1	0.00	0.00	0.00
LNRD_B									
9,600.0	12.28	75.52	9,417.1	430.6	1,667.3	224.6	0.00	0.00	0.00
9,700.0	12.28	75.52	9,514.8	435.9	1,687.9	227.4	0.00	0.00	0.00
9,800.0	12.28	75.52	9,612.5	441.2	1,708.5	230.2	0.00	0.00	0.00
9,900.0	12.28	75.52	9,710.2	446.6	1,729.1	232.9	0.00	0.00	0.00
10,000.0	12.28	75.52	9,807.9	451.9	1,749.7	235.7	0.00	0.00	0.00
10,100.0	12.28	75.52	9,905.6	457.2	1,770.3	238.5	0.00	0.00	0.00
10,129.0	12.28	75.52	9,934.0	458.7	1,776.3	239.3	0.00	0.00	0.00
FBSG_SD									
10,200.0	12.28	75.52	10,003.3	462.5	1,790.9	241.3	0.00	0.00	0.00
10,300.0	12.28	75.52	10,101.0	467.8	1,811.5	244.0	0.00	0.00	0.00
10,400.0	12.28	75.52	10,198.8	473.2	1,832.1	246.8	0.00	0.00	0.00
10,411.5	12.28	75.52	10,210.0	473.8	1,834.4	247.1	0.00	0.00	0.00
SBSG_SH									
10,500.0	12.28	75.52	10,296.5	478.5	1,852.7	249.6	0.00	0.00	0.00
10,596.3	12.28	75.52	10,390.5	483.6	1,872.5	252.2	0.00	0.00	0.00
10,600.0	12.21	75.52	10,394.2	483.8	1,873.3	252.4	2.00	-2.00	0.00
10,700.0	10.21	75.52	10,492.3	488.7	1,892.1	254.9	2.00	-2.00	0.00
10,741.3	9.38	75.52	10,533.0	490.4	1,898.9	255.8	2.00	-2.00	0.00
SBSG_SD									
10,800.0	8.21	75.52	10,591.0	492.7	1,907.6	257.0	2.00	-2.00	0.00
10,900.0	6.21	75.52	10,690.2	495.8	1,919.7	258.6	2.00	-2.00	0.00
11,000.0	4.21	75.52	10,789.8	498.1	1,928.5	259.8	2.00	-2.00	0.00
11,100.0	2.21	75.52	10,889.6	499.5	1,933.9	260.5	2.00	-2.00	0.00
11,200.0	0.21	75.52	10,989.6	500.0	1,936.0	260.8	2.00	-2.00	0.00
11,210.4	0.00	0.00	11,000.0	500.0	1,936.0	260.8	2.00	-2.00	0.00
11,300.0	0.00	0.00	11,089.6	500.0	1,936.0	260.8	0.00	0.00	0.00
11,304.4	0.00	0.00	11,094.0	500.0	1,936.0	260.8	0.00	0.00	0.00
TBSG_CARB									
11,400.0	0.00	0.00	11,189.6	500.0	1,936.0	260.8	0.00	0.00	0.00
11,500.0	0.00	0.00	11,289.6	500.0	1,936.0	260.8	0.00	0.00	0.00
11,600.0	0.00	0.00	11,389.6	500.0	1,936.0	260.8	0.00	0.00	0.00
11,700.0	0.00	0.00	11,489.6	500.0	1,936.0	260.8	0.00	0.00	0.00
11,800.0	0.00	0.00	11,589.6	500.0	1,936.0	260.8	0.00	0.00	0.00
11,900.0	0.00	0.00	11,689.6	500.0	1,936.0	260.8	0.00	0.00	0.00
12,000.0	0.00	0.00	11,789.6	500.0	1,936.0	260.8	0.00	0.00	0.00
12,026.4	0.00	0.00	11,816.0	500.0	1,936.0	260.8	0.00	0.00	0.00
TBSG_SD									
12,100.0	0.00	0.00	11,889.6	500.0	1,936.0	260.8	0.00	0.00	0.00
12,200.0	0.00	0.00	11,989.6	500.0	1,936.0	260.8	0.00	0.00	0.00
12,300.0	0.00	0.00	12,089.6	500.0	1,936.0	260.8	0.00	0.00	0.00



EOG Resources

Planning Report

Database:	EDM	Local Co-ordinate Reference:	Well #745H
Company:	EOG Resources - Midland	TVD Reference:	kb = 25' @ 3554.0usft
Project:	Lea County, NM (NAD 83 NME)	MD Reference:	kb = 25' @ 3554.0usft
Site:	Savage 2 State Com	North Reference:	Grid
Well:	#745H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OH		
Design:	Plan #1		

Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
12,377.4	0.00	0.00	12,167.0	500.0	1,936.0	260.8	0.00	0.00	0.00
TBSG_FS									
12,400.0	0.00	0.00	12,189.6	500.0	1,936.0	260.8	0.00	0.00	0.00
12,467.4	0.00	0.00	12,257.0	500.0	1,936.0	260.8	0.00	0.00	0.00
WFMP									
12,488.4	0.00	0.00	12,278.0	500.0	1,936.0	260.8	0.00	0.00	0.00
WFMP_CL_X									
12,500.0	0.00	0.00	12,289.6	500.0	1,936.0	260.8	0.00	0.00	0.00
12,561.4	0.00	0.00	12,351.0	500.0	1,936.0	260.8	0.00	0.00	0.00
WFMP_CL_Y									
12,588.4	0.00	0.00	12,378.0	500.0	1,936.0	260.8	0.00	0.00	0.00
WFMP_U1									
12,596.9	0.00	0.00	12,386.5	500.0	1,936.0	260.8	0.00	0.00	0.00
12,600.0	0.37	180.00	12,389.6	500.0	1,936.0	260.8	12.00	12.00	0.00
12,625.0	3.37	180.00	12,414.6	499.2	1,936.0	261.6	12.00	12.00	0.00
12,650.0	6.37	180.00	12,439.5	497.1	1,936.0	263.5	12.00	12.00	0.00
12,675.0	9.37	180.00	12,464.2	493.6	1,936.0	266.7	12.00	12.00	0.00
12,700.0	12.37	180.00	12,488.8	488.9	1,936.0	271.1	12.00	12.00	0.00
12,725.0	15.37	180.00	12,513.0	482.9	1,936.0	276.6	12.00	12.00	0.00
12,750.0	18.37	180.00	12,537.0	475.7	1,936.0	283.4	12.00	12.00	0.00
12,758.5	19.39	180.00	12,545.0	472.9	1,936.0	285.9	12.00	12.00	0.00
WFMP_U2									
12,775.0	21.37	180.00	12,560.5	467.2	1,936.0	291.2	12.00	12.00	0.00
12,800.0	24.37	180.00	12,583.5	457.5	1,936.0	300.3	12.00	12.00	0.00
12,817.4	26.46	180.00	12,599.2	450.0	1,936.0	307.2	12.00	12.00	0.00
12,825.0	27.37	180.03	12,606.0	446.6	1,936.0	310.4	12.00	12.00	0.36
12,850.0	30.37	180.11	12,627.9	434.5	1,936.0	321.6	12.00	12.00	0.32
12,875.0	33.37	180.17	12,649.1	421.3	1,936.0	333.8	12.00	12.00	0.27
12,900.0	36.37	180.23	12,669.6	407.0	1,935.9	347.0	12.00	12.00	0.23
12,925.0	39.37	180.28	12,689.4	391.6	1,935.8	361.2	12.00	12.00	0.20
12,950.0	42.37	180.33	12,708.3	375.3	1,935.7	376.4	12.00	12.00	0.17
12,967.5	44.48	180.35	12,721.0	363.2	1,935.7	387.5	12.00	12.00	0.16
WFMP_U3									
12,975.0	45.37	180.36	12,726.3	358.0	1,935.6	392.4	12.00	12.00	0.15
13,000.0	48.37	180.40	12,743.4	339.7	1,935.5	409.3	12.00	12.00	0.14
13,025.0	51.37	180.43	12,759.5	320.6	1,935.4	426.9	12.00	12.00	0.13
13,050.0	54.37	180.46	12,774.6	300.7	1,935.2	445.3	12.00	12.00	0.12
13,075.0	57.37	180.49	12,788.6	280.0	1,935.1	464.5	12.00	12.00	0.11
13,099.0	60.24	180.51	12,801.0	259.5	1,934.9	483.4	12.00	12.00	0.10
WFMP_U4									
13,100.0	60.37	180.51	12,801.5	258.6	1,934.9	484.2	12.00	12.00	0.10
13,125.0	63.37	180.54	12,813.3	236.6	1,934.7	504.6	12.00	12.00	0.10
13,150.0	66.37	180.56	12,823.9	213.9	1,934.4	525.5	12.00	12.00	0.09
13,175.0	69.37	180.58	12,833.3	190.8	1,934.2	546.9	12.00	12.00	0.09
13,200.0	72.37	180.60	12,841.5	167.2	1,934.0	568.7	12.00	12.00	0.08
13,225.0	75.37	180.62	12,848.5	143.1	1,933.7	590.9	12.00	12.00	0.08
13,250.0	78.37	180.64	12,854.1	118.8	1,933.4	613.4	12.00	12.00	0.08
13,275.0	81.37	180.66	12,858.5	94.2	1,933.2	636.1	12.00	12.00	0.08
13,300.0	84.37	180.68	12,861.6	69.4	1,932.9	659.0	12.00	12.00	0.08
13,325.0	87.37	180.70	12,863.4	44.5	1,932.6	682.0	12.00	12.00	0.08
13,346.9	90.00	180.72	12,864.0	22.5	1,932.3	702.2	12.00	12.00	0.07
13,400.0	90.00	180.72	12,864.0	-30.5	1,931.6	751.2	0.00	0.00	0.00
13,500.0	90.00	180.72	12,864.0	-130.5	1,930.4	843.4	0.00	0.00	0.00

EOG Resources

Planning Report



Database:	EDM	Local Co-ordinate Reference:	Well #745H
Company:	EOG Resources - Midland	TVD Reference:	kb = 25' @ 3554.0usft
Project:	Lea County, NM (NAD 83 NME)	MD Reference:	kb = 25' @ 3554.0usft
Site:	Savage 2 State Com	North Reference:	Grid
Well:	#745H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OH		
Design:	Plan #1		

Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
13,600.0	90.00	180.72	12,864.0	-230.5	1,929.1	935.7	0.00	0.00	0.00
13,700.0	90.00	180.72	12,864.0	-330.5	1,927.9	1,027.9	0.00	0.00	0.00
13,800.0	90.00	180.72	12,864.0	-430.5	1,926.6	1,120.2	0.00	0.00	0.00
13,900.0	90.00	180.72	12,864.0	-530.5	1,925.4	1,212.4	0.00	0.00	0.00
14,000.0	90.00	180.72	12,864.0	-630.5	1,924.1	1,304.7	0.00	0.00	0.00
14,100.0	90.00	180.72	12,864.0	-730.5	1,922.9	1,397.0	0.00	0.00	0.00
14,200.0	90.00	180.72	12,864.0	-830.5	1,921.6	1,489.2	0.00	0.00	0.00
14,300.0	90.00	180.72	12,864.0	-930.5	1,920.4	1,581.5	0.00	0.00	0.00
14,400.0	90.00	180.72	12,864.0	-1,030.4	1,919.1	1,673.7	0.00	0.00	0.00
14,500.0	90.00	180.72	12,864.0	-1,130.4	1,917.9	1,766.0	0.00	0.00	0.00
14,600.0	90.00	180.72	12,864.0	-1,230.4	1,916.7	1,858.3	0.00	0.00	0.00
14,700.0	90.00	180.72	12,864.0	-1,330.4	1,915.4	1,950.5	0.00	0.00	0.00
14,800.0	90.00	180.72	12,864.0	-1,430.4	1,914.2	2,042.8	0.00	0.00	0.00
14,900.0	90.00	180.72	12,864.0	-1,530.4	1,912.9	2,135.0	0.00	0.00	0.00
15,000.0	90.00	180.72	12,864.0	-1,630.4	1,911.7	2,227.3	0.00	0.00	0.00
15,100.0	90.00	180.72	12,864.0	-1,730.4	1,910.4	2,319.6	0.00	0.00	0.00
15,200.0	90.00	180.72	12,864.0	-1,830.4	1,909.2	2,411.8	0.00	0.00	0.00
15,300.0	90.00	180.72	12,864.0	-1,930.4	1,907.9	2,504.1	0.00	0.00	0.00
15,400.0	90.00	180.72	12,864.0	-2,030.4	1,906.7	2,596.3	0.00	0.00	0.00
15,500.0	90.00	180.72	12,864.0	-2,130.4	1,905.4	2,688.6	0.00	0.00	0.00
15,600.0	90.00	180.72	12,864.0	-2,230.4	1,904.2	2,780.9	0.00	0.00	0.00
15,700.0	90.00	180.72	12,864.0	-2,330.3	1,902.9	2,873.1	0.00	0.00	0.00
15,800.0	90.00	180.72	12,864.0	-2,430.3	1,901.7	2,965.4	0.00	0.00	0.00
15,900.0	90.00	180.72	12,864.0	-2,530.3	1,900.4	3,057.6	0.00	0.00	0.00
16,000.0	90.00	180.72	12,864.0	-2,630.3	1,899.2	3,149.9	0.00	0.00	0.00
16,100.0	90.00	180.72	12,864.0	-2,730.3	1,897.9	3,242.2	0.00	0.00	0.00
16,200.0	90.00	180.72	12,864.0	-2,830.3	1,896.7	3,334.4	0.00	0.00	0.00
16,300.0	90.00	180.72	12,864.0	-2,930.3	1,895.4	3,426.7	0.00	0.00	0.00
16,400.0	90.00	180.72	12,864.0	-3,030.3	1,894.2	3,518.9	0.00	0.00	0.00
16,500.0	90.00	180.72	12,864.0	-3,130.3	1,892.9	3,611.2	0.00	0.00	0.00
16,600.0	90.00	180.72	12,864.0	-3,230.3	1,891.7	3,703.5	0.00	0.00	0.00
16,700.0	90.00	180.72	12,864.0	-3,330.3	1,890.4	3,795.7	0.00	0.00	0.00
16,800.0	90.00	180.72	12,864.0	-3,430.3	1,889.2	3,888.0	0.00	0.00	0.00
16,900.0	90.00	180.72	12,864.0	-3,530.3	1,887.9	3,980.2	0.00	0.00	0.00
17,000.0	90.00	180.72	12,864.0	-3,630.2	1,886.7	4,072.5	0.00	0.00	0.00
17,100.0	90.00	180.72	12,864.0	-3,730.2	1,885.4	4,164.8	0.00	0.00	0.00
17,200.0	90.00	180.72	12,864.0	-3,830.2	1,884.2	4,257.0	0.00	0.00	0.00
17,300.0	90.00	180.72	12,864.0	-3,930.2	1,882.9	4,349.3	0.00	0.00	0.00
17,400.0	90.00	180.72	12,864.0	-4,030.2	1,881.7	4,441.5	0.00	0.00	0.00
17,500.0	90.00	180.72	12,864.0	-4,130.2	1,880.4	4,533.8	0.00	0.00	0.00
17,600.0	90.00	180.72	12,864.0	-4,230.2	1,879.2	4,626.1	0.00	0.00	0.00
17,700.0	90.00	180.72	12,864.0	-4,330.2	1,877.9	4,718.3	0.00	0.00	0.00
17,800.0	90.00	180.72	12,864.0	-4,430.2	1,876.7	4,810.6	0.00	0.00	0.00
17,900.0	90.00	180.72	12,864.0	-4,530.2	1,875.4	4,902.8	0.00	0.00	0.00
18,000.0	90.00	180.72	12,864.0	-4,630.2	1,874.2	4,995.1	0.00	0.00	0.00
18,013.8	90.00	180.72	12,864.0	-4,644.0	1,874.0	5,007.9	0.00	0.00	0.00



EOG Resources

Planning Report

Database:	EDM	Local Co-ordinate Reference:	Well #745H
Company:	EOG Resources - Midland	TVD Reference:	kb = 25' @ 3554.0usft
Project:	Lea County, NM (NAD 83 NME)	MD Reference:	kb = 25' @ 3554.0usft
Site:	Savage 2 State Com	North Reference:	Grid
Well:	#745H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OH		
Design:	Plan #1		

Design Targets									
Target Name	Dip Angle	Dip Dir.	TVD	+N/-S	+E/-W	Northing	Easting	Latitude	Longitude
- hit/miss target	(°)	(°)	(usft)	(usft)	(usft)	(usft)	(usft)		
- Shape									
Brushy Top(Savage 2 St - plan misses target center by 728.0usft at 7561.1usft MD (7424.9 TVD, 322.1 N, 1247.3 E) - Point	0.00	0.00	7,270.0	500.0	1,936.0	425,078.00	756,456.00	32° 10' 0.147 N	103° 38' 17.241 W
FTP(Savage 2 State Coi - plan hits target center - Point	0.00	0.00	12,599.2	450.0	1,936.0	425,028.00	756,456.00	32° 9' 59.652 N	103° 38' 17.245 W
PBHL(Savage 2 State C - plan hits target center - Point	0.00	0.00	12,864.0	-4,644.0	1,874.0	419,934.00	756,394.00	32° 9' 9.249 N	103° 38' 18.349 W

Formations						
Measured Depth	Vertical Depth	Name	Lithology	Dip	Dip Direction	
(usft)	(usft)			(°)	(°)	
978.0	978.0	RSLR				
1,057.0	1,057.0	TMSK_ANHY				
1,321.0	1,321.0	TOP_SALT				
4,764.2	4,692.0	BASE_SALT				
4,997.6	4,920.0	LMAR				
5,027.2	4,949.0	BLCN				
5,941.2	5,842.0	CYCN				
7,445.6	7,312.0	BYCN				
9,014.5	8,845.0	BSGL				
9,149.6	8,977.0	LNRD_A				
9,544.7	9,363.0	LNRD_B				
10,129.0	9,934.0	FBSG_SD				
10,411.5	10,210.0	SBSG_SH				
10,741.3	10,533.0	SBSG_SD				
11,304.4	11,094.0	TBSG_CARB				
12,026.4	11,816.0	TBSG_SD				
12,377.4	12,167.0	TBSG_FS				
12,467.4	12,257.0	WFMP				
12,488.4	12,278.0	WFMP_CL_X				
12,561.4	12,351.0	WFMP_CL_Y				
12,588.4	12,378.0	WFMP_U1				
12,758.5	12,545.0	WFMP_U2				
12,967.5	12,721.0	WFMP_U3				
13,099.0	12,801.0	WFMP_U4				

Intent ☐ As Drilled ☐

API #		
Operator Name:	Property Name:	Well Number

Kick Off Point (KOP)

UL	Section	Township	Range	Lot	Feet	From N/S	Feet	From E/W	County
Latitude					Longitude				NAD

First Take Point (FTP)

UL	Section	Township	Range	Lot	Feet	From N/S	Feet	From E/W	County
Latitude					Longitude				NAD

Last Take Point (LTP)

UL	Section	Township	Range	Lot	Feet	From N/S	Feet	From E/W	County
Latitude					Longitude				NAD

Is this well the defining well for the Horizontal Spacing Unit? ☐Is this well an infill well? ☐

If infill is yes please provide API if available, Operator Name and well number for Defining well for Horizontal Spacing Unit.

API #		
Operator Name:	Property Name:	Well Number

KZ 06/29/2018