

Well Name: CENTRAL BISTI UNIT	Well Location: T25N / R12W / SEC 7 / NWNE / 36.421036 / -108.14975	County or Parish/State: SAN JUAN / NM
Well Number: 75	Type of Well: INJECTION - ENHANCED RECOVERY	Allottee or Tribe Name:
Lease Number: NMSF078056	Unit or CA Name: CENTRAL BISTI UNIT	Unit or CA Number: NMNM78386X
US Well Number: 3004525100	Well Status: Water Injection Well	Operator: DJR OPERATING LLC

Subsequent Report

Sundry ID: 2631353

Type of Submission: Subsequent Report	Type of Action: Plug and Abandonment
Date Sundry Submitted: 08/30/2021	Time Sundry Submitted: 11:11
Date Operation Actually Began: 08/12/2021	

Actual Procedure: The subject well was Plugged & Abandoned on 08/12/2021 per the attached detailed As Plugged Wellbore Diagram and Marker.

SR Attachments

Actual Procedure

- CBU\_WI\_75\_PxA\_Marker\_20210830111122.pdf
- CBU\_WI\_75\_EOWR\_20210830111122.pdf

<b>Well Name:</b> CENTRAL BISTI UNIT	<b>Well Location:</b> T25N / R12W / SEC 7 / NWNE / 36.421036 / -108.14975	<b>County or Parish/State:</b> SAN JUAN / NM
<b>Well Number:</b> 75	<b>Type of Well:</b> INJECTION - ENHANCED RECOVERY	<b>Allottee or Tribe Name:</b>
<b>Lease Number:</b> NMSF078056	<b>Unit or CA Name:</b> CENTRAL BISTI UNIT	<b>Unit or CA Number:</b> NMNM78386X
<b>US Well Number:</b> 3004525100	<b>Well Status:</b> Water Injection Well	<b>Operator:</b> DJR OPERATING LLC

Operator Certification

I certify that the foregoing is true and correct. Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction. Electronic submission of Sundry Notices through this system satisfies regulations requiring a submission of Form 3160-5 or a Sundry Notice.

<b>Operator Electronic Signature:</b> SHAW-MARIE FORD	<b>Signed on:</b> AUG 30, 2021 11:11 AM
<b>Name:</b> DJR OPERATING LLC	
<b>Title:</b> Regulatory Specialist	
<b>Street Address:</b> 1 Road 3263	
<b>City:</b> Aztec	<b>State:</b> NM
<b>Phone:</b> (505) 632-3476	
<b>Email address:</b> sford@djrlc.com	

Field Representative

<b>Representative Name:</b>		
<b>Street Address:</b>		
<b>City:</b>	<b>State:</b>	<b>Zip:</b>
<b>Phone:</b>		
<b>Email address:</b>		

BLM Point of Contact

<b>BLM POC Name:</b> KENNETH G RENNICK	<b>BLM POC Title:</b> Petroleum Engineer
<b>BLM POC Phone:</b> 5055647742	<b>BLM POC Email Address:</b> krennick@blm.gov
<b>Disposition:</b> Accepted	<b>Disposition Date:</b> 10/20/2021
<b>Signature:</b> Kenneth Rennick	

**P&A Marker  
DJR Operating, LLC  
Central Bisti WI-75  
API: 30-045-25100  
NWNE B-7-25N-12W  
San Juan County, NM**



P&A End of Well Report  
DJR Operating, LLC  
Central Bisti Unit WI #075  
API: 30-045-25100  
NWNE B-07-25N-12W

Spud Date: 04/29/1982

Plugged Date: 08/12/2021

8-09-2021:

Plug 1: Gallup: Spot balanced plug of 21 sx from 4922'. Tagged plug at 4567'.

8-10-2021:

PT csg, did not test. Run CBL log from 4567' to surface.

Plugs 2 & 3 : Mancos: Mix and pump balanced plug with 10 sx from 3871'. WOC. Tagged plug at 3725' on 8-11-2021'. PT csg, good test. Mix and place 8 sx from 3725' to 3537'.

8-11-2021:

Plug 4: Mesa Verde: Mix and spot balanced plug of 10 sx from 1983' to 1768'.

Plug 5: Chacra: Perf 4 holes at 1570'. Pressure up, to 1100 psi, no rate into holes. Receive approval for balanced plug of 10 sx from 1597' to 1368'.

Plugs 6 & 7: Pictured Cliffs, Fruitland: Perf 4 holes at 1241'. Pressure up, to 1050 psi, no rate into holes. Receive approval for balanced plug of 20 sx from 1269' to 790'.

8-12-2021:

Tagged plug at 850'. Mix and pump 8 sx from 850' to 662'.

Plug 8: Surface csg shoe to surface: Perf 4 holes at 269'. Establish circulation to surface out 3 1/2" and 4 1/2" casing annulus. WOC, cut off WH, TOC at 4'.

Install P&A marker. Top off casing and cellar with 15 sx cement.

All cement used: Class G cement mixed at 15.8 ppg. 1.15 yield.

BLM Representative onsite to witness: Gail Clayton

**End of Well Report  
DJR Operating, LLC  
Central Bisti Unit WI-75**

API # 30-045-25100  
NW/NE, Unit B, Sec 7, T25N, R12W  
San Juan County, NM

GL: 6251'  
KB: 6264'  
Spud Date 4/29/82

**SURF CSG**

Hole size 12.25"  
Csg Size: 8.625"  
Wt: 24#  
Grade: K-55  
ID: 8.097"  
Depth 219'  
Csg cap ft<sup>3</sup>: 0.3575  
TOC: Circ cmt

**FORMATION TOPS**

Nacimiento	Surface
Ojo Alamo	280'
Kirtland	211'
Fruitland	890'
Pictured Cliffs	1191'
Chacra	1520'
Mesa Verde	1918'
Mancos	3821'
Gallup	4735'


**PROD CSG**

Hole size 7.875"  
Csg Size: 4.5"  
Wt: 10.5#  
Grade: K-55  
ID: 4.052  
Depth 5088'  
Csg cap ft<sup>3</sup>: 0.0895  
Csg/Csg Ann ft<sup>3</sup>: 0.2471  
Csg/OH cap ft<sup>3</sup>: 0.2278  
TOC: 3805'  
3-1/2" FJ liner set at 4372'.  
Circ. cement to surface

3-1/2" FJ Liner  
8.81# N-80 hydril  
2.992" ID

Perfs 4832-4922'

PBTD 5044'  
TD 5100'

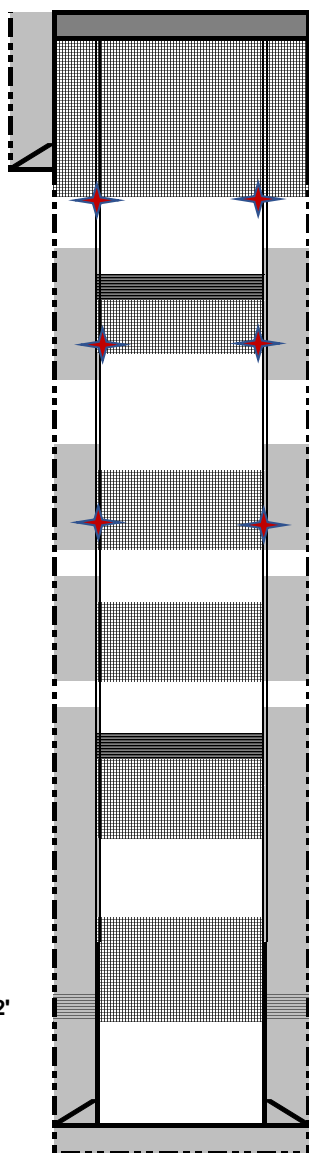

8-12-2021: Install P&A marker. Top off casing and cellar with 15 sx cement.

8-12-2021: Plug 8: Surface csg shoe to surface: Perf 4 holes at 269'. Establish circulation to surface out 3 1/2" and 4 1/2" casing annulus. WOC, cut off WH, TOC at 4'.

8-11-2021: Plugs 6 & 7: Pictured Cliffs, Fruitland: Perf 4 holes at 1241'. Pressure up, to 1050 psi, no rate into holes. Receive approval for balanced plug of 20 sx from 1269' to 790'. 8-12-2021: Tagged plug at 850'. Mix and pump 8 sx from 850' to 662'.

8-11-2021: Plug 5: Chacra: Perf 4 holes at 1570'. Pressure up, to 1100 psi, no rate into holes. Receive approval for balanced plug of 10 sx from 1597' to 1368'.

8-11-2021: Plug 4: Mesa Verde: Mix and spot balanced plug of 10 sx from 1983' to 1768'.

8-10-2021: Plugs 2 & 3 : Mancos: Mix and pump balanced plug with 10 sx from 3871'. WOC. Tagged plug at 3725' on 8-11-2021'. PT csg, good test. Mix and place 8 sx from 3725' to 3537'.

8-10-2021: Run CBL log from 4567' to surface.

8-10-2021: Pt csg, did not test

8-09-2021: Plug 1: Gallup: Spot balanced plug of 21 sx from 4922'. Tagged plug at 4567'.

All cement used was Class G, mixed at 15.8 ppg, yield 1.15  
Regulatory Representative: Gail Clayton, BLM  
GPS Coordinates: Lat: 36.421111; Long: -108.150555

**District I**  
1625 N. French Dr., Hobbs, NM 88240  
Phone:(575) 393-6161 Fax:(575) 393-0720

**District II**  
811 S. First St., Artesia, NM 88210  
Phone:(575) 748-1283 Fax:(575) 748-9720

**District III**  
1000 Rio Brazos Rd., Aztec, NM 87410  
Phone:(505) 334-6178 Fax:(505) 334-6170

**District IV**  
1220 S. St Francis Dr., Santa Fe, NM 87505  
Phone:(505) 476-3470 Fax:(505) 476-3462

**State of New Mexico**  
**Energy, Minerals and Natural Resources**  
**Oil Conservation Division**  
**1220 S. St Francis Dr.**  
**Santa Fe, NM 87505**

CONDITIONS

Action 58391

CONDITIONS

Operator: DJR OPERATING, LLC 1 Road 3263 Aztec, NM 87410	OGRID: 371838
	Action Number: 58391
	Action Type: [C-103] Sub. Plugging (C-103P)

CONDITIONS

Created By	Condition	Condition Date
mkuehling	None	11/15/2021