

Well Name: BISTI COAL 6	Well Location: T25N / R12W / SEC 6 / SWNE / 36.432678 / -108.148605	County or Parish/State: SAN JUAN / NM
Well Number: 1	Type of Well: OTHER	Allottee or Tribe Name:
Lease Number: NMSF078056	Unit or CA Name:	Unit or CA Number:
US Well Number: 3004528384	Well Status: Gas Well Shut In	Operator: DJR OPERATING LLC

Subsequent Report

Sundry ID: 2509450

Type of Submission: Subsequent Report	Type of Action: Plug and Abandonment
Date Sundry Submitted: 07/23/2021	Time Sundry Submitted: 09:09
Date Operation Actually Began: 07/15/2021	

**Actual Procedure:** The subject well was Plugged & Abandoned on July 15, 2021 per the attached detailed As Plugged Wellbore Diagram and Marker.

SR Attachments

- Actual Procedure
- PA\_Marker\_20210723090905.pdf
  - Bisti\_Coal\_6\_1\_AsPlugged\_WBD\_20210723090905.pdf

<b>Well Name:</b> BISTI COAL 6	<b>Well Location:</b> T25N / R12W / SEC 6 / SWNE / 36.432678 / -108.148605	<b>County or Parish/State:</b> SAN JUAN / NM
<b>Well Number:</b> 1	<b>Type of Well:</b> OTHER	<b>Allottee or Tribe Name:</b>
<b>Lease Number:</b> NMSF078056	<b>Unit or CA Name:</b>	<b>Unit or CA Number:</b>
<b>US Well Number:</b> 3004528384	<b>Well Status:</b> Gas Well Shut In	<b>Operator:</b> DJR OPERATING LLC

Operator Certification

I certify that the foregoing is true and correct. Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction. Electronic submission of Sundry Notices through this system satisfies regulations requiring a submission of Form 3160-5 or a Sundry Notice.

<b>Operator Electronic Signature:</b> SHAW-MARIE FORD	<b>Signed on:</b> JUL 23, 2021 09:09 AM
<b>Name:</b> DJR OPERATING LLC	
<b>Title:</b> Regulatory Specialist	
<b>Street Address:</b> 1 Road 3263	
<b>City:</b> Aztec	<b>State:</b> NM
<b>Phone:</b> (505) 632-3476	
<b>Email address:</b> sford@djrlc.com	

Field Representative

<b>Representative Name:</b>		
<b>Street Address:</b>		
<b>City:</b>	<b>State:</b>	<b>Zip:</b>
<b>Phone:</b>		
<b>Email address:</b>		

BLM Point of Contact

<b>BLM POC Name:</b> KENNETH G RENNICK	<b>BLM POC Title:</b> Petroleum Engineer
<b>BLM POC Phone:</b> 5055647742	<b>BLM POC Email Address:</b> krennick@blm.gov
<b>Disposition:</b> Accepted	<b>Disposition Date:</b> 10/19/2021
<b>Signature:</b> Kenneth Rennick	

**Plug and Abandonment Marker  
DJR Operating, LLC  
Bisti Coal 6 1  
API # 30-045-28384  
SW/NE, Unit G, Sec. 6, T25N, R12W  
San Juan County, NM**



**36°25'58" N 108°8'58" W  
Bloomfield, NM  
6190 ft Elevation**

P&A End of Well Report  
DJR Operating, LLC  
Bisti Coal 6 #001  
API: 30-045-28384  
SWNE G-6-25N-12W

Spud Date: 11/09/1990

Plugged Date: 07/15/2021

7/15/21:

Plug 1: Pumped 18 sx cement below cement retainer at 1100'. Mixed and pumped 80 sx above retainer to surface.

Set DHM and topped off cellar with 30 sx. All cement plugs were Class G at 15.8 ppg, 1.15 ft<sup>3</sup>/sk yield.

Casing did not test. Ran CBL. Found TOC at 30'. Good bond throughout.

All cement used: Class G cement mixed at 15.8 ppg. 1.15 yield.

BLM Representative onsite to witness: Darrell Priddy

# DJR Operating, LLC Proposed Wellbore Diagram

**Bisti Coal 6 1**

API # 30-045-28384

SW/NE, Unit G, Sec 6, T25N, R12W  
San Juan County, NM

GL 6185'

KB N/A

Spud Date 11/9/1990

## SURF CSG

Hole size 8.75"  
Csg Size: 7"  
Wt: 20#  
Grade: J-55  
ID: 6.456"  
Depth 134'  
casing cap ft<sup>3</sup>/ft: 0.2273  
TOC: Circ cmt  
to surface

## FORMATION TOPS


FORMATION TOPS	Surface
Nacimiento	Surface
Ojo Alamo	N/A
Kirtland	N/A
Basal Ft. Coal	995'
Pictured Cliffs	1174'

## PROD CSG

Hole size 6.25"  
Csg Size: 4.5"  
Wt: 9.5#  
Grade: J-55  
ID: 4.09"  
Depth 1298'  
casing cap ft<sup>3</sup>/ft: 0.0912  
7x4.5 capacity ft<sup>3</sup>/ft 0.1169  
TOC: Circ cmt  
to surface

Cement Ret. 1100'  
Fruitland Coal perms  
1124-1148'

PBTD 1238'  
TD 1300'

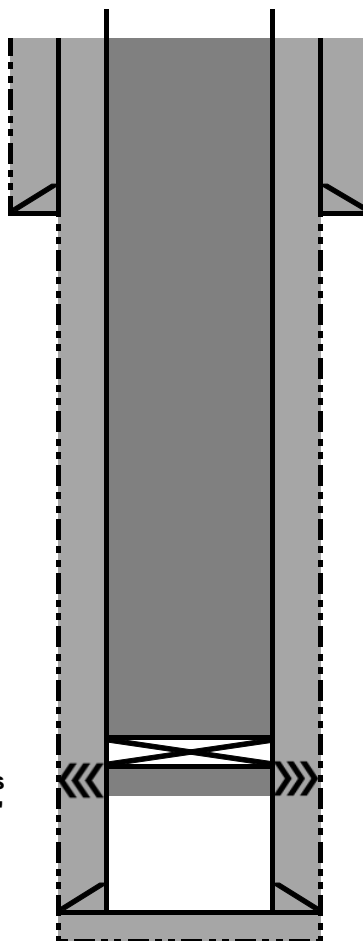

7/15/21: Casing did not test. Ran CBL.  
Found TOC at 30'. Good bond throughout.

**Plug 1:** 7/15/21: Pumped 18 sx cement  
below cement retainer at 1100'. Mixed and  
pumped 80 sx above retainer to surface.  
Set DHM and topped off cellar with 30 sx.  
All cement plugs were Class G at 15.8  
ppg, 1.15 ft<sup>3</sup>/sk yield.

BLM Representative: Darrell Priddy

**District I**  
1625 N. French Dr., Hobbs, NM 88240  
Phone:(575) 393-6161 Fax:(575) 393-0720  
**District II**  
811 S. First St., Artesia, NM 88210  
Phone:(575) 748-1283 Fax:(575) 748-9720  
**District III**  
1000 Rio Brazos Rd., Aztec, NM 87410  
Phone:(505) 334-6178 Fax:(505) 334-6170  
**District IV**  
1220 S. St Francis Dr., Santa Fe, NM 87505  
Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico  
Energy, Minerals and Natural Resources  
Oil Conservation Division  
1220 S. St Francis Dr.  
Santa Fe, NM 87505

CONDITIONS  
  
Action 58303

CONDITIONS

Operator: DJR OPERATING, LLC 1 Road 3263 Aztec, NM 87410	OGRID: 371838
	Action Number: 58303
	Action Type: [C-103] Sub. Plugging (C-103P)

CONDITIONS

Created By	Condition	Condition Date
mkuehling	None	11/15/2021