

Office  
 District I – (575) 393-6161  
 1625 N. French Dr., Hobbs, NM 88240  
 District II – (575) 748-1283  
 811 S. First St., Artesia, NM 88210  
 District III – (505) 334-6178  
 1000 Rio Brazos Rd., Aztec, NM 87410  
 District IV – (505) 476-3460  
 1220 S. St. Francis Dr., Santa Fe, NM  
 87505

State of New Mexico  
 Energy, Minerals and Natural Resources

Form C-103  
 Revised July 18, 2013

OIL CONSERVATION DIVISION  
 1220 South St. Francis Dr.  
 Santa Fe, NM 87505

SUNDRY NOTICES AND REPORTS ON WELLS (DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)		WELL API NO. 30-025-27618
1. Type of Well: Oil Well <input type="checkbox"/> Gas Well <input type="checkbox"/> Other <input type="checkbox"/>		5. Indicate Type of Lease STATE <input checked="" type="checkbox"/> FEE <input type="checkbox"/>
2. Name of Operator Matador Production Company		6. State Oil & Gas Lease No.
3. Address of Operator 5400 LBJ Freeway Ste 1500 Dallas, TX 75240		7. Lease Name or Unit Agreement Name Southeast Airstrip
4. Well Location Unit Letter <u>N</u> : <u>660</u> feet from the <u>South</u> line and <u>1980</u> feet from the <u>West</u> line Section <u>31</u> Township <u>18S</u> Range <u>35E</u> NMPM County <u>Lea</u>		8. Well Number <u>001</u>
11. Elevation (Show whether DR, RKB, RT, GR, etc.)		9. OGRID Number 228937
		10. Pool name or Wildcat LA RICA; MORROW, EAST (GAS)

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:		SUBSEQUENT REPORT OF:	
PERFORM REMEDIAL WORK <input type="checkbox"/>	PLUG AND ABANDON <input checked="" type="checkbox"/>	REMEDIAL WORK <input type="checkbox"/>	ALTERING CASING <input type="checkbox"/>
TEMPORARILY ABANDON <input type="checkbox"/>	CHANGE PLANS <input type="checkbox"/>	COMMENCE DRILLING OPNS. <input type="checkbox"/>	P AND A <input type="checkbox"/>
PULL OR ALTER CASING <input type="checkbox"/>	MULTIPLE COMPL <input type="checkbox"/>	CASING/CEMENT JOB <input type="checkbox"/>	
DOWNHOLE COMMINGLE <input type="checkbox"/>		OTHER: <input type="checkbox"/>	
CLOSED-LOOP SYSTEM <input type="checkbox"/>			
OTHER: <input type="checkbox"/>			

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 19.15.7.14 NMAC. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

Matador is requesting to plug and abandon the Southeast Airstrip #1, per the required COA, following the procedure below:

- Notify NMOCD 24 hrs before MIRU.
- Safety mtg, MIRU, check pressures.
- ND wellhead, NU BOPs & TOOH w/ tbg.
- RU WL. WL set CIBP @ 13,020'. RD WL. TIH w/ tbg and spot 25 sx Cl H cmt on top of CIBP. WOC & Tag. (Morrow)
- Circ and displace hole w/ MLF.
- Spot 60 sx Class H cmt plug from 12,430' – 11,585'. WOC & Tag. (Atoka + Strawn + DV)
- Spot 96 sx Class H cmt plug from 10,753' – 9,400'. WOC & Tag. (Wolfcamp + TOC)
- Perf @ 7,798' & sqz Cl H cmt. Spot 60 sx Class H cmt plug from 7,798' – 6,953'. WOC & Tag. (Bone Springs + Delaware)
- Perf @ 5,288' & sqz Cl C cmt. Spot 50 sx Class C cmt plug from 5,288' – 4,532'. WOC & Tag. (Grayburg + Queen)
- Perf @ 4,040' & sqz Cl C cmt. Spot 50 sx Class C cmt plug from 4,040' – 3,284'. WOC & Tag. (Seven Rivers + Yates + Salt Bottom)
- Perf @ 2,240' & sqz Cl C cmt. Spot 25 sx Class C cmt plug from 2,240' – 1,862'. WOC & Tag. (Salt Top)
- Perf @ 477' & circulate Cl C cmt to surface.
- Cut off wellhead and ensure cmt to surface on all csg strings.
- Install above ground marker per NMOCD specifications.

[Current and proposed wellbore diagrams attached]

\*Mud laden fluid (MLF) mixed at 25sx/100 bbls water will be spotted between each plug.

Spud Date:

4" diameter 4' tall Above Ground Marker

Rig Release Date:

SEE ATTACHED CONDITIONS  
OF APPROVAL

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE Brett Jennings TITLE Regulatory Analyst DATE 7/28/2021

Type or print name Brett Jennings E-mail address: Brett.Jennings@matadorresources.com PHONE: 972-629-2160

**For State Use Only**

APPROVED BY: Kerry Fortner TITLE Compliance Officer A DATE 12/1/21

Conditions of Approval (if any): 575-263-6633

Matador is requesting to plug and abandon the Southeast Airstrip #1, per the required COA, following the procedure below:


- Notify NMOCD 24 hrs before MIRU.
- Safety mtg, MIRU, check pressures.
- ND wellhead, NU BOPs & TOO H w/ tbg.
- RU WL. WL set CIBP @ 13,020'. RD WL. TIH w/ tbg and spot 25 sx CI H cmt on top of CIBP. WOC & Tag. (Morrow)
- Circ and displace hole w/ MLF.
- Spot 60 sx Class H cmt plug from 12,430' – 11,585'. WOC & Tag. (Atoka + Strawn + DV)
- Spot 96 sx Class H cmt plug from 10,753' – 9,400'. WOC & Tag. (Wolfcamp + TOC)
- Perf @ 7,798' & sqz CI H cmt. Spot 60 sx Class H cmt plug from 7,798' – 6,953'. WOC & Tag. (Bone Springs + Delaware)
- Perf @ 5,288' & sqz CI C cmt. Spot 50 sx Class C cmt plug from 5,288' – 4,532'. WOC & Tag. (Grayburg + Queen)
- Perf @ 4,040' & sqz CI C cmt. Spot 50 sx Class C cmt plug from 4,040' – 3,284'. WOC & Tag. (Seven Rivers + Yates + Salt Bottom)
- Perf @ 2,240' & sqz CI C cmt. Spot 25 sx Class C cmt plug from 2,240' – 1,862'. WOC & Tag. (Salt Top)
- Perf @ 477' & circulate CI C cmt to surface.
- Cut off wellhead and ensure cmt to surface on all csg strings.
- Install above ground marker per NMOCD specifications.

[Current and proposed wellbore diagrams attached]

\*Mud laden fluid (MLF) mixed at 25sx/100 bbls water will be spotted between each plug.

Southeast Airstrip Com #1  
 660' FSL & 1980' FWL Sec 31-18S-35E  
 Lea County, NM  
 API: 30-025-27618  
 WELLBORE SCHEMATIC  
 Spudded: 1/2/82

7/23/2021 by TW

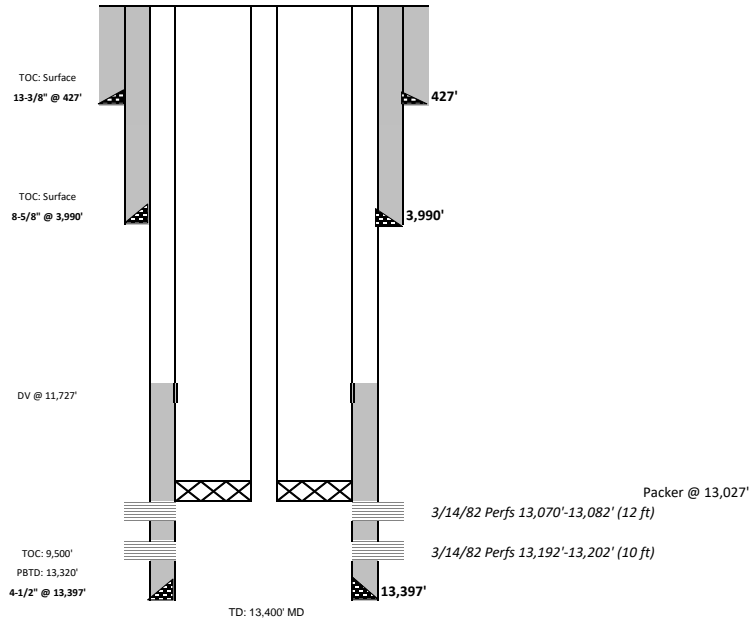

Casing Information						
	Hole Size	Casing Size	Type	Weight (lb/ft)	Joints	Depth Set
Surface	17-1/2"	13-3/8"	H-40	48	12	427'
Intermediate	11"	8-5/8"	J-55	32, 24	96	3,990'
Production	7-7/8"	4-1/2"		13.5	158	
	7-7/8"	4-1/2"		11.5	194	13,397'
	4-1/2" DV Tool Marker Jt. Float Collar	11,727' - 13,355'				

Cementing Record			TOC	Date of Run
Surface	425 sx CI C (Circulated 50 sx to surface)		Surface	1/3/1982
Intermediate	1600 sx Hal Lite + 200 sx CI C (Circulated 200 sx to surface)		Surface	1/10/1982
Production	Stg 1: 450 sx CI H Stg 2: 500 sx CI H		9,500'	3/1/1982

Tubing Information		
Item	Notes	Depth
2-3/8" tbg	~420 jts 2-3/8" 4.7# L80 8rd EUE	13,027'
Packer/TAC		13,027'
Seat Nipple		13,026'

Geologic Markers	
Salt Top	2,190'
Salt Btm	3,435'
Yates	3,446'
Seven Rivers	3,900'
Queen	4,667'
Grayburg	5,238'
San Andres	5,840'
Delaware	7,075'
Bone Springs	7,748'
Wolfcamp	10,703'
Strawn	12,004'
Atoka	12,380'
Morrow	12,982'
Low Morrow	13,084'
Chester	13,289'


Rod String Information		
Item	Notes	Qty
Pony Rods	-	0
7/8"	-	0
3/4"	-	0
7/8"	-	0
1"	-	0
Pump	-	0

Southeast Airstrip Com #1  
660' FSL & 1980' FWL Sec 31-18S-35E  
Lea County, NM  
API: 30-025-27618

**PROPOSED P&A WELLBORE SCHEMATIC**

Spudded: 1/2/82

7/23/2021 by TW

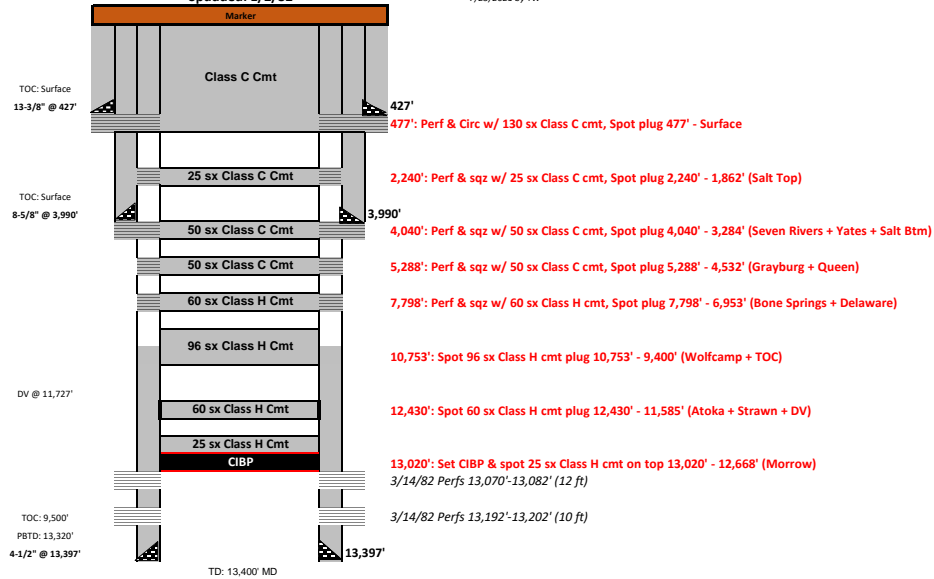

Casing Information						
	Hole Size	Casing Size	Type	Weight (lb/ft)	Joints	Depth Set
Surface	17-1/2"	13-3/8"	H-40	48	12	427'
Intermediate	11"	8-5/8"	J-55	32, 24	96	3,990'
Production	7-7/8"	4-1/2"		11.6	158	6,320'
	7-7/8"	4-1/2"		13.5	194	13,397'
	4-1/2" DV Tool	11,727'				
	Marker Jt.					
	Float Collar	13,355'				

Cementing Record				TOC	Date of Run
Surface	425 sx CI C (Circulated 50 sx to surface)			Surface	1/3/1982
Intermediate	1600 sx Hal Lite + 200 sx CI C (Circulated 200 sx to surface)			Surface	1/10/1982
Production	Stg 1: 450 sx CI H				
	Stg 2: 500 sx CI H			9,500'	3/1/1982

Tubing Information		
Item	Notes	Depth
2-3/8" tbg	~420 jts 2-3/8" 4.7# L80 8rd EUE	13,027'
Packer/TAC		13,027'
Seat Nipple		13,026'

Rod String Information		
Item	Notes	Qty
Pony Rods	-	0
7/8"	-	0
3/4"	-	0
7/8"	-	0
1"	-	0
Pump	-	0

Geologic Markers	
Salt Top	2,190'
Salt Btm	3,435'
Yates	3,446'
Seven Rivers	3,900'
Queen	4,667'
Grayburg	5,238'
San Andres	5,840'
Delaware	7,075'
Bone Springs	7,748'
Wolfcamp	10,703'
Strawn	12,004'
Atoka	12,380'
Morrow	12,982'
Low Morrow	13,084'
Chester	13,289'

**CONDITIONS OF APPROVAL  
FOR PLUGGING AND ABANDONMENT  
OCD - Southern District**

The following is a guide or checklist in preparation of a plugging program, this is not all inclusive and care must be exercised in establishing special plugging programs in unique and unusual cases, Notify NMOCD District Office I (Hobbs) at (575)-263-6633 at least 24 hours before beginning work. After MIRU rig will remain on well until it is plugged to surface. OCD is to be notified before rig down.

**Company representative will be on location during plugging procedures.**

1. A notice of intent to plug and abandon a wellbore is required to be approved before plugging operations are conducted. A cement evaluation tool is required in order to ensure isolation of producing formations, protection of water and correlative rights. A cement bond log or other accepted cement evaluation tool is to be provided to the division for evaluation if one has not been previously run or if the well did not have cement circulated to surface during the original casing cementing job or subsequent cementing jobs. Insure all bradenheads have been exposed, identified and valves are operational prior to rig up.
2. Closed loop system is to be used for entire plugging operation. Upon completion, contents of steel pits are to be hauled to a permitted disposal location.
3. Trucking companies being used to haul oilfield waste fluids to a disposal - commercial or private- shall have an approved NMOCD C-133 permit. A copy of this permit shall be available in each truck used to haul waste products. It is the responsibility of the operator as well as the contractor, to verify that this permit is in place prior to performing work. Drivers shall be able to produce a copy upon request of an NMOCD Field inspector.
4. Filing a subsequent C-103 will serve as notification that the well has been plugged.
5. A final C-103 shall be filed (and a site inspection by NMOCD Inspector to determine if the location is satisfactorily cleaned, all equipment, electric poles and trash has been removed to Meet NMOCD standards) before bonding can be released.
6. If work has not begun within 1 Year of the approval of this procedure, an extension request must be file stating the reason the well has not been plugged.
7. Squeeze pressures are not to exceed 500 psi, unless approval is given by NMOCD.
8. Produced water will not be used during any part of the plugging operation.
9. Mud laden fluids must be placed between all cement plugs mixed at 25 sacks per 100 bbls of water.
10. All cement plugs will be a minimum of 100' in length or a minimum of 25 sacks of cement, whichever is greater. 50' of calculated cement excess required for inside casing plugs and 100% calculated cement excess required on outside casing plugs.
11. Class 'C' cement will be used above 7500 feet.
12. Class 'H' cement will be used below 7500 feet.
13. A cement plug is required to be set 50' above and 50' below, casing stubs, DV tools, attempted casing cut offs, cement tops outside casing, salt sections and anywhere the casing is perforated, these plugs require a 4 hour WOC and then will be tagged
14. All Casing Shoes Will Be Perforated 50' below shoe depth and Attempted to be Squeezed, cement needs to be 50' above and 50' Below Casing Shoe inside the Production Casing.
16. When setting the top out cement plug in production, intermediate and surface casing, wellbores should remain full at least 30 minutes after plugs are set
17. A CIBP is to be set within 100' of production perforations, capped with 100' of cement, WOC 4 hours and tag.
18. A CIBP with 35' of cement may be used in lieu of the 100' plug if set with a bailer. This plug will be placed within 100' of the top perforation, (WOC 4 hrs and tag).

19. No more than 3000' is allowed between cement plugs in cased hole and 2000' in open hole.
20. Some of the Formations to be isolated with cement plugs are: These plugs to be set to isolate formation tops
- A) Fusselman
  - B) Devonian
  - C) Morrow
  - D) Wolfcamp
  - E) Bone Springs
  - F) Delaware
  - G) Any salt sections
  - H) Abo
  - I) Glorieta
  - J) Yates.
  - K) Potash---(In the R-111-P Area (Potash Mine Area),  
A solid cement plug must be set across the salt section. Fluid used to mix the cement shall be saturated with the salts that are common to the section penetrated and in suitable proportions, not more than 3% calcium chloride (by weight of cement) will be considered the desired mixture whenever possible, WOC 4 hours and tag, this plug will be 50' below the bottom and 50' above the top of the Formation.
21. If cement does not exist behind casing strings at recommended formation depths, the casing can be cut and pulled with plugs set at recommended depths. If casing is not pulled, perforations will be shot and cement squeezed behind casing, WOC and tagged. These plugs will be set 50' below formation bottom to 50' above formation top inside the casing.

### **DRY HOLE MARKER REQUIREMENTS**

The operator shall mark the exact location of the plugged and abandoned well with a steel marker not less than four inches in diameter, 3' below ground level with a plate of at least ¼" welded to the top of the casing and the dry hole marker welded on the plate with the following information welded on the dry hole marker:

1. Operator name
2. Lease and Well Number
3. API Number
4. Unit letter
5. Quarter Section (feet from the North, South, East or West)
6. Section, Township and Range
7. Plugging Date
8. County

### **SPECIAL CASES -----AGRICULTURE OR PRARIE CHICKEN BREEDING AREAS**

In these areas, a below ground marker is required with all pertinent information mentioned above on a plate, set 3' below ground level, a picture of the plate will be supplied to NMOCD for record, the exact location of the marker (longitude and latitude by GPS) will be provided to NMOCD (We typically require a current survey to verify the GPS)

### **SITE REMEDIATION DUE WITHIN ONE YEAR OF WELL PLUGGING COMPLETION**

Matador is requesting to plug and abandon the Southeast Airstrip #1, per the required COA, following the procedure below:


- Notify NMOCD 24 hrs before MIRU.
- Safety mtg, MIRU, check pressures.
- ND wellhead, NU BOPs & TOO H w/ tbg.
- RU WL. WL set CIBP @ 13,020'. RD WL. TIH w/ tbg and spot 25 sx CI H cmt on top of CIBP. WOC & Tag. (Morrow)
- Circ and displace hole w/ MLF.
- Spot 60 sx Class H cmt plug from 12,430' – 11,585'. WOC & Tag. (Atoka + Strawn + DV)
- Spot 96 sx Class H cmt plug from 10,753' – 9,400'. WOC & Tag. (Wolfcamp + TOC)
- Perf @ 7,798' & sqz CI H cmt. Spot 60 sx Class H cmt plug from 7,798' – 6,953'. WOC & Tag. (Bone Springs + Delaware)
- Perf @ 5,288' & sqz CI C cmt. Spot 50 sx Class C cmt plug from 5,288' – 4,532'. WOC & Tag. (Grayburg + Queen)
- Perf @ 4,040' & sqz CI C cmt. Spot 50 sx Class C cmt plug from 4,040' – 3,284'. WOC & Tag. (Seven Rivers + Yates + Salt Bottom)
- Perf @ 2,240' & sqz CI C cmt. Spot 25 sx Class C cmt plug from 2,240' – 1,862'. WOC & Tag. (Salt Top)
- Perf @ 477' & circulate CI C cmt to surface.
- Cut off wellhead and ensure cmt to surface on all csg strings.
- Install above ground marker per NMOCD specifications.

[Current and proposed wellbore diagrams attached]

\*Mud laden fluid (MLF) mixed at 25sx/100 bbls water will be spotted between each plug.

Southeast Airstrip Com #1  
 660' FSL & 1980' FWL Sec 31-18S-35E  
 Lea County, NM  
 API: 30-025-27618  
 WELLBORE SCHEMATIC  
 Spudded: 1/2/82

7/23/2021 by TW

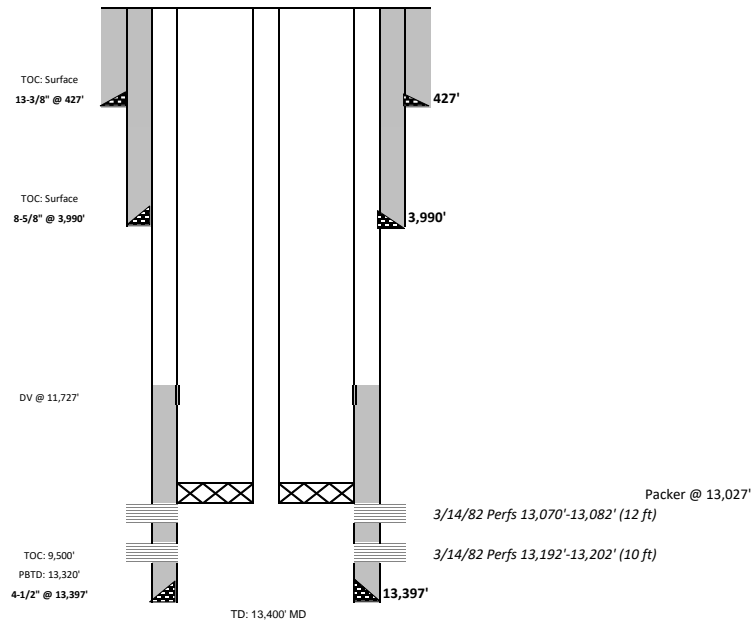

Casing Information						
	Hole Size	Casing Size	Type	Weight (lb/ft)	Joints	Depth Set
Surface	17-1/2"	13-3/8"	H-40	48	12	427'
Intermediate	11"	8-5/8"	J-55	32, 24	96	3,990'
Production	7-7/8"	4-1/2"		13.5	158	
	7-7/8"	4-1/2"		11.5	194	13,397'
	4-1/2" DV Tool Marker Jt. Float Collar	11,727' - 13,355'				

Cementing Record			TOC	Date of Run
Surface	425 sx CI C (Circulated 50 sx to surface)		Surface	1/3/1982
Intermediate	1600 sx Hal Lite + 200 sx CI C (Circulated 200 sx to surface)		Surface	1/10/1982
Production	Stg 1: 450 sx CI H Stg 2: 500 sx CI H		9,500'	3/1/1982

Tubing Information		
Item	Notes	Depth
2-3/8" tbg	~420 jts 2-3/8" 4.7# L80 8rd EUE	13,027'
Packer/TAC		13,027'
Seat Nipple		13,026'

Geologic Markers	
Salt Top	2,190'
Salt Btm	3,435'
Yates	3,446'
Seven Rivers	3,900'
Queen	4,667'
Grayburg	5,238'
San Andres	5,840'
Delaware	7,075'
Bone Springs	7,748'
Wolfcamp	10,703'
Strawn	12,004'
Atoka	12,380'
Morrow	12,982'
Low Morrow	13,084'
Chester	13,289'


Rod String Information		
Item	Notes	Qty
Pony Rods	-	0
7/8"	-	0
3/4"	-	0
7/8"	-	0
1"	-	0
Pump	-	0

Southeast Airstrip Com #1  
660' FSL & 1980' FWL Sec 31-18S-35E  
Lea County, NM  
API: 30-025-27618

**PROPOSED P&A WELLBORE SCHEMATIC**

Spudded: 1/2/82

7/23/2021 by TW

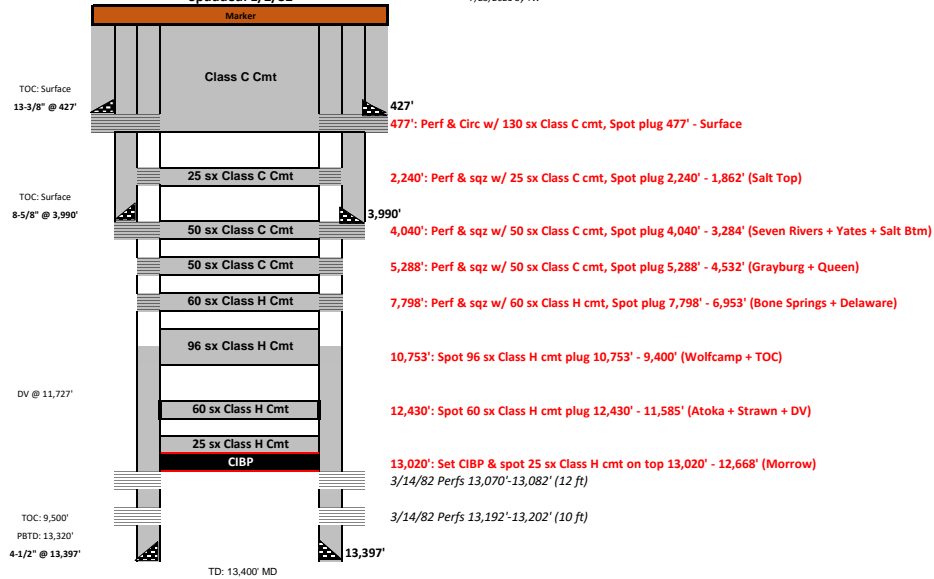

Casing Information						
	Hole Size	Casing Size	Type	Weight (lb/ft)	Joints	Depth Set
Surface	17-1/2"	13-3/8"	H-40	48	12	427'
Intermediate	11"	8-5/8"	J-55	32, 24	96	3,990'
Production	7-7/8"	4-1/2"		11.6	158	6,320'
	7-7/8"	4-1/2"		13.5	194	13,397'
	4-1/2" DV Tool	11,727'				
	Marker Jt.					
	Float Collar	13,355'				

Cementing Record				TOC	Date of Run
Surface	425 sx CI C (Circulated 50 sx to surface)			Surface	1/3/1982
Intermediate	1600 sx Hal Lite + 200 sx CI C (Circulated 200 sx to surface)			Surface	1/10/1982
Production	Stg 1: 450 sx CI H				
	Stg 2: 500 sx CI H			9,500'	3/1/1982

Tubing Information		
Item	Notes	Depth
2-3/8" tbg	~420 jts 2-3/8" 4.7# L80 8rd EUE	13,027'
Packer/TAC		13,027'
Seat Nipple		13,026'

Rod String Information		
Item	Notes	Qty
Pony Rods	-	0
7/8"	-	0
3/4"	-	0
7/8"	-	0
1"	-	0
Pump	-	0

Geologic Markers	
Salt Top	2,190'
Salt Btm	3,435'
Yates	3,446'
Seven Rivers	3,900'
Queen	4,667'
Grayburg	5,238'
San Andres	5,840'
Delaware	7,075'
Bone Springs	7,748'
Wolfcamp	10,703'
Strawn	12,004'
Atoka	12,380'
Morrow	12,982'
Low Morrow	13,084'
Chester	13,289'

**District I**  
1625 N. French Dr., Hobbs, NM 88240  
Phone:(575) 393-6161 Fax:(575) 393-0720  
**District II**  
811 S. First St., Artesia, NM 88210  
Phone:(575) 748-1283 Fax:(575) 748-9720  
**District III**  
1000 Rio Brazos Rd., Aztec, NM 87410  
Phone:(505) 334-6178 Fax:(505) 334-6170  
**District IV**  
1220 S. St Francis Dr., Santa Fe, NM 87505  
Phone:(505) 476-3470 Fax:(505) 476-3462

**State of New Mexico**  
**Energy, Minerals and Natural Resources**  
**Oil Conservation Division**  
**1220 S. St Francis Dr.**  
**Santa Fe, NM 87505**

CONDITIONS  
  
Action 38646

CONDITIONS

Operator: MATADOR PRODUCTION COMPANY One Lincoln Centre Dallas, TX 75240	OGRID: 228937
	Action Number: 38646
	Action Type: [C-103] NOI Plug & Abandon (C-103F)

CONDITIONS

Created By	Condition	Condition Date
kfortner	See attached conditions of approval	12/1/2021