R	<i>Received by OCD: D1/24/2021 9:29:51 AM</i> U.S. Department of the Interior BUREAU OF LAND MANAGEMENT		Sundry Print Report
	Well Name: BISTI GALLUP 22	Well Location: T25N / R12W / SEC 22 / SESE / 36.381614 / -108.092182	County or Parish/State: SAN JUAN / NM
	Well Number: 16	Type of Well: OIL WELL	Allottee or Tribe Name:
	Lease Number: NMNM25449	Unit or CA Name:	Unit or CA Number:
	US Well Number: 3004534130	Well Status: Oil Well Shut In	Operator: DJR OPERATING LLC

Subsequent Report

Sundry ID: 2644284

Type of Submission: Subsequent Report Date Sundry Submitted: 11/15/2021 Date Operation Actually Began: 11/03/2021 Type of Action: Plug and Abandonment Time Sundry Submitted: 11:16 6

Actual Procedure: The subject well was Plugged & Abandoned on 11/03/2021 per the attached End of Well Report, Wellbore Diagram, and Marker.

SR Attachments

Actual Procedure

PA_Marker_Bisti_Gallup_22_16_20211115111608.pdf

EOWR_Bisti_Gallup_22_16_20211115111608.pdf

AsPlugged_WBD_Bisti_Gallup_22_16_20211115111608.pdf

R	eceived by OCD: 11/24/2021 9:29:51 AM Well Name: BISTI GALLUP 22	Well Location: T25N / R12W / SEC 22 / SESE / 36.381614 / -108.092182	County or Parish/State: SAN
	Well Number: 16	Type of Well: OIL WELL	Allottee or Tribe Name:
	Lease Number: NMNM25449	Unit or CA Name:	Unit or CA Number:
	US Well Number: 3004534130	Well Status: Oil Well Shut In	Operator: DJR OPERATING LLC

Operator Certification

I certify that the foregoing is true and correct. Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction. Electronic submission of Sundry Notices through this system satisfies regulations requiring a submission of Form 3160-5 or a Sundry Notice.

Operator Electronic Signature: SHAW-MARIE FORD

State: NM

Signed on: NOV 15, 2021 11:16 AM

Name: DJR OPERATING LLC Title: Regulatory Specialist Street Address: 1 Road 3263 City: Aztec Phone: (505) 632-3476 Email address: sford@djrllc.com

Field Representative

Representative Name: Street Address: City: State: Phone: Email address:

BLM Point of Contact

BLM POC Name: KENNETH G RENNICK BLM POC Phone: 5055647742 Disposition: Accepted Signature: Kenneth Rennick

BLM POC Title: Petroleum Engineer BLM POC Email Address: krennick@blm.gov Disposition Date: 11/24/2021

Zip:

DJR Operating, LLC P&A End of Well Report Bisti Gallup 22 -16 API # 30-045-34130 SE/SE, Unit P, Sec 22, T25N, R12W San Juan County, NM Spud Date: 12-09-2007 Plug Date: 11-03-2021

11-01-2021:

MIRU rig and equipment. SICP = 550, BH = 0.

<u>11-02-2021:</u>

SICP = 550, BH - 0, bleed off pressure.

TIH to 4765' with bit and string mill. TOOH. TIH with CR, set CR at 4735'. PT casing to 600 psi. Test good.

P&A Plug 1: Gallup perfs: Pump 13 sx cement through CR into Gallup perfs.

P&A Plug 2: Mix and pump P&A Plug 2 from 4735' to 4535' with 23 sx cement on top of CR to cover the Gallup formation top.

P&A Plug 3: Mix and pump P&A Plug 3 from 3796' to 3426' with 43 sx cement to cover the Mancos formation top.

P&A Plug 4: Mix and pump P&A Plug 4 from 2192' to 1797' with 46 sx cement to cover the Cliff House formation top.

<u>11-03-2021:</u>

P&A Plug 5: Mix and pump P&A Plug 5 from 1541' to 1369' with 20 sx cement to cover the Chacra formation top.

P&A Plug 6: Mix and pump P&A Plug 6 from 1196' to surface with 143 sx cement to cover the Pictured Cliffs, Fruitland, Kirtland and Ojo Alamo formation tops.

TOOH. NDWBOP, cut off WH, install P&A marker. TOC in 8 5/8" x 5 $\frac{1}{2}$ " at 100', inside 5 $\frac{1}{2}$ " casing at 23'. Mix top off plug of 42 sx cement. RELEASED RIG.

All cement used: Class G cement mixed at 15.8 ppg, yield 1.15

Regulatory Representative: Jimmie Dobson, BLM

GPS Coordinates: Lat: 36.381642N, Long: -108.0921412W

/sl

DJR Operating, LLC P&A Marker Bisti Gallup 22 -16 API # 30-045-34130 SESE Unit P, Sec 22, T25N, R12W San Juan County, NM Spud Date: 12-09-2007 Plug Date: 11-03-2021




AsPlugged Wellbore Diagram

DJR Operating, LLC Bisti Gallup 22-16

API # 30-045-34130 SE/SE, Unit P, Sec 22, T25N, R12W San Juan County, NM

> GL 6353' KB 6365' Spud Date 12/9/2007

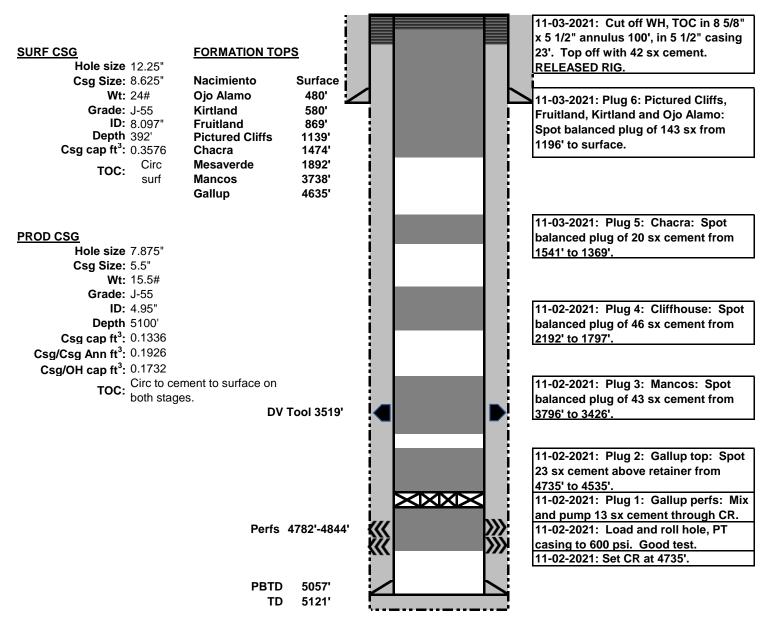

All cement used was Class G cement mixed at 15.8 ppg, yield 1.15 ft³ Regulatory Representative: Jimmie Dobson, BLM GPS Coordinates: Lat: 36.381642N, Long: -108.0921412W District I 1625 N. French Dr., Hobbs, NM 88240 Phone:(575) 393-6161 Fax:(575) 393-0720

District II 811 S. First St., Artesia, NM 88210 Phone:(575) 748-1283 Fax:(575) 748-9720

District III

1000 Rio Brazos Rd., Aztec, NM 87410 Phone:(505) 334-6178 Fax:(505) 334-6170

District IV

1220 S. St Francis Dr., Santa Fe, NM 87505 Phone: (505) 476-3470 Fax: (505) 476-3462

State of New Mexico Energy, Minerals and Natural Resources Oil Conservation Division 1220 S. St Francis Dr. Santa Fe, NM 87505

CONDITIONS

CONDITIONO				
Operator:		OGRID:		
DJI	R OPERATING, LLC	371838		
1 R	Road 3263	Action Number:		
Azt	tec, NM 87410	63616		
		Action Type:		
		[C-103] Sub. Plugging (C-103P)		
CONDITIONS				
Created By	Condition	Condition Date		

Created By Condition mkuehling None

CONDITIONS

Action 63616

12/28/2021