

Submit Copy To Appropriate District  
Office  
District I - (575) 393-6161  
1625 N. French Dr., Hobbs, NM 88240  
District II - (575) 748-1283  
811 S. First St., Artesia, NM 88210  
District III - (505) 334-6178  
1000 Rio Brazos Rd., Aztec, NM 87410  
District IV - (505) 476-3460  
1220 S. St. Francis Dr., Santa Fe, NM  
87505

State of New Mexico  
Energy, Minerals and Natural Resources

Form C-103  
Revised July 18, 2013

OIL CONSERVATION DIVISION  
1220 South St. Francis Dr.  
Santa Fe, NM 87505

WELL API NO. 30-025-30487
5. Indicate Type of Lease STATE <input type="checkbox"/> FEE <input checked="" type="checkbox"/>
6. State Oil & Gas Lease No. 19552
7. Lease Name or Unit Agreement Name South Hobbs G/SA Unit
8. Well Number 224
9. OGRID Number 157984
10. Pool name or Wildcat Hobbs; Grayburg - San Andres
4. Well Location Unit Letter <u>B</u> : <u>625</u> feet from the <u>NORTH</u> line and <u>1530</u> feet from the <u>EAST</u> line Section <u>4</u> Township <u>19S</u> Range <u>38E</u> NMPM County <u>LEA</u>
11. Elevation (Show whether DR, RKB, RT, GR, etc.) 3637' (GL)

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:

PERFORM REMEDIAL WORK ☐ PLUG AND ABANDON ☐  
TEMPORARILY ABANDON ☐ CHANGE PLANS ☐  
PULL OR ALTER CASING ☐ MULTIPLE COMPL ☐  
DOWNHOLE COMMINGLE ☐  
CLOSED-LOOP SYSTEM ☐  
OTHER: RTP/LINER ☒

SUBSEQUENT REPORT OF:

REMEDIAL WORK ☐ ALTERING CASING ☐  
COMMENCE DRILLING OPNS. ☐ P AND A ☐  
CASING/CEMENT JOB ☐  
OTHER: ☐

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 19.15.7.14 NMAC. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

Please see planned procedure attached.

Spud Date:

Rig Release Date:

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE Roni Mathew TITLE Regulatory Advisor DATE 4/21/2022

Type or print name Roni Mathew E-mail address: roni\_mathew@oxy.com PHONE: 713.215.7827

**For State Use Only**

APPROVED BY: Kerry Fortner TITLE Compliance Officer A DATE 5/23/22  
Conditions of Approval

SHU 224 (API#: 30-025-30487)

RTP/Liner

Operation:

- MIRU PU
- Kill well, ND WH – NU BOP
- PU RIH with 6-1/8" bit and Tag PBTD @ 3914' Pressure test csg to 500 psi. DO Cement CIBP @ 3950' CO to TD @ 4306'
- RIH with CICR and set @ 3900,
- RU Cementing trucks and cement sqz existing perforation
- RIH with 6-1/8" bit and DO Cement down to TD ~ 4306'
- Run 5-1/2", 15.5# L-80 partial liner from 4306' (TD) to 3800'
- RU Cement truck and cement liner, RD Cement trucks
- PU RIH with 6-1/8" bit and DO Cement, CICR, Cement to ~ 3800 (TOL). POOH w/ bit
- PU RIH with 4-3/4" bit and CO liner to PBTD (4306'). POOH w/ bit
- RU WL and Perf as following:
  - 4070' - 4080', 4100' - 4110', 4120' - 4130', 4140' - 4150', 4160' - 4170', 4180' - 4190', 4200' - 4210', 4220' - 4230', 4240' - 4250' (4-JSPF)
- RD WL
- RIH with PPI Tool and acid stim new perms w/ ~ 5000 gal of 15% HCL NEFE, POOH and LD PPI Tool
- RIH with ESP Production equipment
- Install new production tree (SFRM)
- ND BOP – NU WH, RD MOPU
- Place well in service

## Revision 0

**Spud: 10/9/1988**

## DEVIATION SURVEYS

DEGREE

**16" @ 40'**

**Cement with 1000 sx Class C x 2% CaCl<sub>2</sub>**

**CIRCULATED 55 sx TO SURFACE**

**14-3/4" hole**

10-3/4" 40.5# set at 1544'

**Cement with 1300 sx Class C**

**Circulate 73 sx to surface**

**9-7/8" Hole**

**CIBP @ 3950'**  
**Cap with Cement to 3914'**

**Sqz Perfs: 4000' - 4020', 4000' - 4044', 4030' - 4040', 4060' - 4080'**

**Perfs: 4060' - 4080', 4099' - 4124', 4150' - 4160', 4166' - 4192', 4200' - 4210', 4220' - 4230', 4246' - 4260'**

7" 23# set at 4306'

## WELLBORE DIAGRAM

(updated: 04/18/2022 CER)

Revision 0

WELL# SOUTH HOBBS G/SA UNIT #224

API# 30-025-30487

Zone: San Andres

Spud: 10/9/1988

GL elev

3620'

## SOUTH HOBBS G/SA UNIT #224

CEMENT

DEVIATION SURVEYS


Surface CasingCement with 1000 sx Class C x 2% CaCl<sub>2</sub>

CIRCULATED 55 sx TO SURFACE

Production Casing

Cement with 1300 sx Class C

Circulate 73 sx to surface

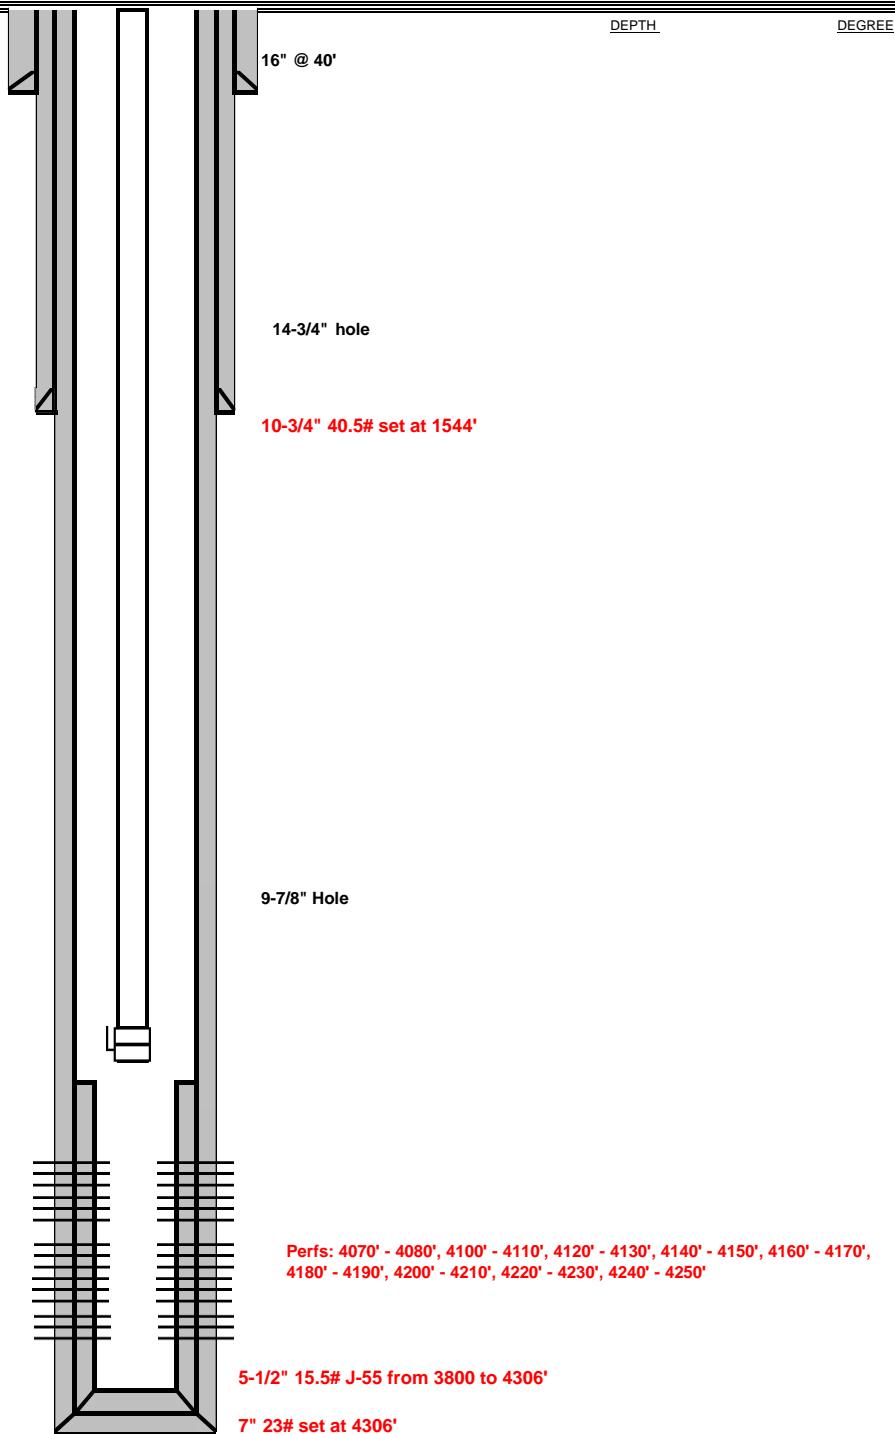

**District I**  
1625 N. French Dr., Hobbs, NM 88240  
Phone:(575) 393-6161 Fax:(575) 393-0720  
**District II**  
811 S. First St., Artesia, NM 88210  
Phone:(575) 748-1283 Fax:(575) 748-9720  
**District III**  
1000 Rio Brazos Rd., Aztec, NM 87410  
Phone:(505) 334-6178 Fax:(505) 334-6170  
**District IV**  
1220 S. St Francis Dr., Santa Fe, NM 87505  
Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico  
Energy, Minerals and Natural Resources  
Oil Conservation Division  
1220 S. St Francis Dr.  
Santa Fe, NM 87505

CONDITIONS

Action 100419

CONDITIONS

Operator: OCCIDENTAL PERMIAN LTD P.O. Box 4294 Houston, TX 772104294	OGRID: 157984
	Action Number: 100419
	Action Type: [C-103] NOI Workover (C-103G)

CONDITIONS

Created By	Condition	Condition Date
kfortner	None	5/23/2022