

Office  
 District I - (575) 393-6161  
 1625 N. French Dr., Hobbs, NM 88240  
 District II - (575) 748-1283  
 811 S. First St., Artesia, NM 88210  
 District III - (505) 334-6178  
 1000 Rio Brazos Rd., Aztec, NM 87410  
 District IV - (505) 476-3460  
 1220 S. St. Francis Dr., Santa Fe, NM  
 87505

State of New Mexico  
 Energy, Minerals and Natural Resources

Form C-103  
 Revised July 18, 2013

OIL CONSERVATION DIVISION  
 1220 South St. Francis Dr.  
 Santa Fe, NM 87505

WELL API NO. 30-025-31571
5. Indicate Type of Lease STATE <input checked="" type="checkbox"/> FEE <input type="checkbox"/>
6. State Oil & Gas Lease No.
7. Lease Name or Unit Agreement Name Lovington Paddock Unit
8. Well Number 139
9. OGRID Number 241333
10. Pool name or Wildcat [40660] LOVINGTON, PADDOCK

SUNDRY NOTICES AND REPORTS ON WELLS (DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)	
1. Type of Well: Oil Well <input checked="" type="checkbox"/> Gas Well <input type="checkbox"/> Other <input type="checkbox"/>	
2. Name of Operator CHEVRON MIDCONTINENT, L.P.	
3. Address of Operator 6301 Deauville BLVD, Midland TX 79706	
4. Well Location Unit Letter <u>F</u> : <u>2527</u> feet from the <u>NORTH</u> line and <u>1550</u> feet from the <u>WEST</u> line Section <u>01</u> Township <u>17S</u> Range <u>36E</u> NMPM County <u>LEA</u>	
11. Elevation (Show whether DR, RKB, RT, GR, etc.) 3829' GR	

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

<b>NOTICE OF INTENTION TO:</b> PERFORM REMEDIAL WORK <input type="checkbox"/> <b>PLUG AND ABANDON</b> <input checked="" type="checkbox"/> TEMPORARILY ABANDON <input type="checkbox"/> CHANGE PLANS <input type="checkbox"/> PULL OR ALTER CASING <input type="checkbox"/> MULTIPLE COMPL <input type="checkbox"/> DOWNHOLE COMMINGLE <input type="checkbox"/> CLOSED-LOOP SYSTEM <input type="checkbox"/> OTHER: <input type="checkbox"/>	<b>SUBSEQUENT REPORT OF:</b> REMEDIAL WORK <input type="checkbox"/> ALTERING CASING <input type="checkbox"/> COMMENCE DRILLING OPNS. <input type="checkbox"/> P AND A <input type="checkbox"/> CASING/CEMENT JOB <input type="checkbox"/> OTHER: <input type="checkbox"/>
--	---

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 19.15.7.14 NMAC. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

Remove production equipment

Set CIBP at 6000'

Spot 26 sacks Class C cement from 6000' to 5750'.

Spot 41 sacks Class C cement from 4592' to 4200'.

Spot 29 sacks Class C cement from 2121' to 1850'.

Spot 26 sacks Class C cement from 1350' to 1100'.

Spot 26 sacks Class C cement from 250' to 0'.

Formations listed on proposed wellbore schematic

Note changes to procedure

Spot 25 sx Class C 3881 Queen

Spot 25 sx Class C 3283 Seven Rivers

4" Diameter 4' tall above ground marker

See attached conditions of approval

Spud Date:

Rig Release Date:

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE Hayes Thibodeaux TITLE Engineer DATE 10/18/2022

Type or print name Hayes Thibodeaux E-mail address: Hayes.Thibodeaux@chevron.com PHONE: 281-726-9683

For State Use Only

APPROVED BY: Kerry Fortner TITLE Compliance Officer A DATE 12/16/22  
 Conditions of Approval

## Proposed Wellbore Diagram

Created: 04/23/19 By: \_\_\_\_\_  
 Updated: \_\_\_\_\_ By: \_\_\_\_\_  
 Lease: Lovington Paddock Unit  
 Field: Lovington  
 Surf. Loc.: 2527 FNL & 1550 FWL  
 Bot. Loc.: \_\_\_\_\_  
 County: Lea St.: NM  
 Status: \_\_\_\_\_

Well #: 139 St. Lse: \_\_\_\_\_  
 API: 30-025-31571  
 Unit Ltr.: F Section: 1  
 TSHP/Rng: 17S-36E  
 Unit Ltr.: \_\_\_\_\_ Section: \_\_\_\_\_  
 TSHP/Rng: \_\_\_\_\_  
 Directions: Lovington, NM  
 Chevno: OS6099

## Surface Casing


Size: 8-5/8"  
 Wt., Grd.: 24#  
 Depth: 1300'  
 Sxs Cmt: 550  
 Circulate: Yes  
 TOC: Surface  
 Hole Size: 12-1/4"

KB: \_\_\_\_\_  
 DF: \_\_\_\_\_  
 GL: 3,829  
 Ini. Spud: 04/17/92  
 Ini. Comp.: 05/14/92

## Production Casing

Size: 5-1/2"  
 Wt., Grd.: 15.5#  
 Depth: 6450'  
 Sxs Cmt: 900  
 Circulate: Yes  
 TOC: Surface  
 Hole Size: 7-7/8"

Rustler	1,972
Salt	2,071
Tansil	2,887
Seven Rivers	3,283
Queen	3,881
Grayburg	4,318
San Andres	4,592
Glorieta	5,963
Paddock	6,041

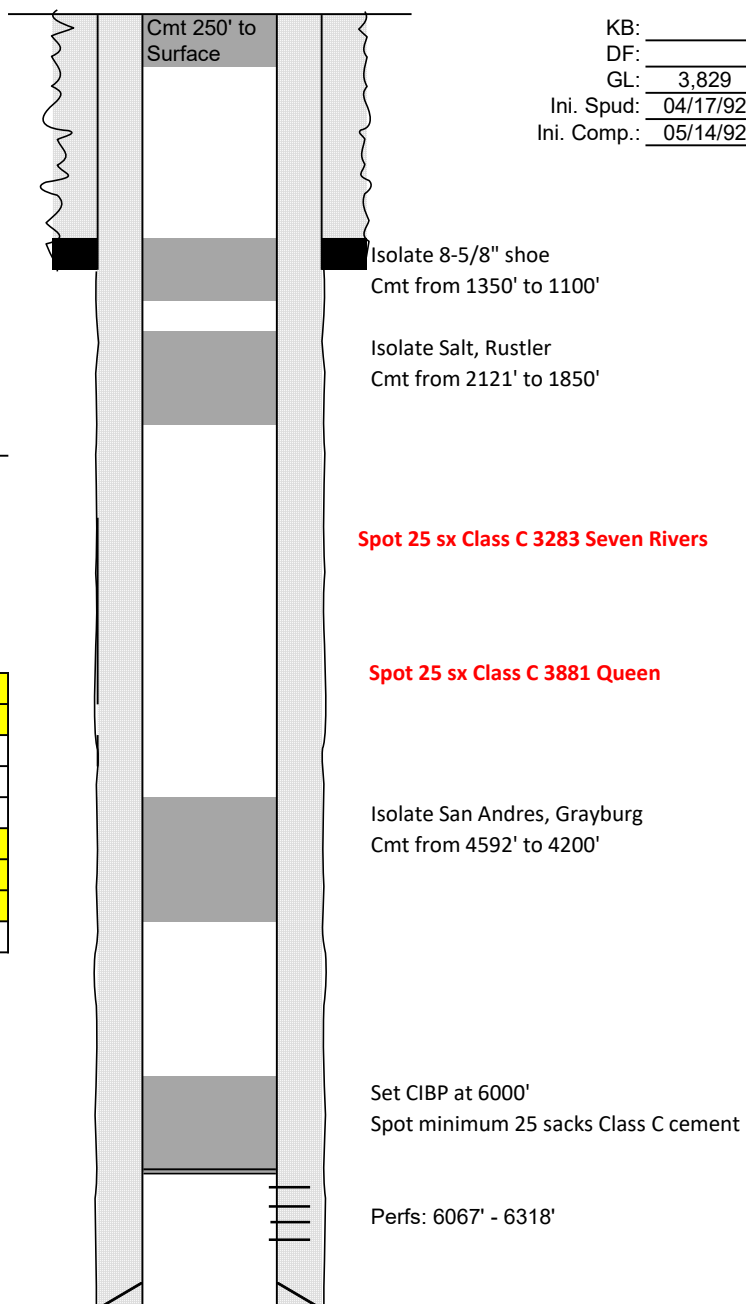

PBTD(est.): 6,402  
 TD: 6,450

**CONDITIONS OF APPROVAL  
FOR PLUGGING AND ABANDONMENT  
OCD - Southern District**

The following is a guide or checklist in preparation of a plugging program, this is not all inclusive and care must be exercised in establishing special plugging programs in unique and unusual cases, Notify NMOCD District Office I (Hobbs) at (575)-263-6633 at least 24 hours before beginning work. After MIRU rig will remain on well until it is plugged to surface. OCD is to be notified before rig down.

**Company representative will be on location during plugging procedures.**

1. A notice of intent to plug and abandon a wellbore is required to be approved before plugging operations are conducted. A cement evaluation tool is required in order to ensure isolation of producing formations, protection of water and correlative rights. A cement bond log or other accepted cement evaluation tool is to be provided to the division for evaluation if one has not been previously run or if the well did not have cement circulated to surface during the original casing cementing job or subsequent cementing jobs. Insure all bradenheads have been exposed, identified and valves are operational prior to rig up.
2. Closed loop system is to be used for entire plugging operation. Upon completion, contents of steel pits are to be hauled to a permitted disposal location.
3. Trucking companies being used to haul oilfield waste fluids to a disposal - commercial or private- shall have an approved NMOCD C-133 permit. A copy of this permit shall be available in each truck used to haul waste products. It is the responsibility of the operator as well as the contractor, to verify that this permit is in place prior to performing work. Drivers shall be able to produce a copy upon request of an NMOCD Field inspector.
4. Filing a subsequent C-103 will serve as notification that the well has been plugged.
5. A final C-103 shall be filed (and a site inspection by NMOCD Inspector to determine if the location is satisfactorily cleaned, all equipment, electric poles and trash has been removed to Meet NMOCD standards) before bonding can be released.
6. If work has not begun within 1 Year of the approval of this procedure, an extension request must be file stating the reason the well has not been plugged.
7. Squeeze pressures are not to exceed 500 psi, unless approval is given by NMOCD.
8. Produced water will not be used during any part of the plugging operation.
9. Mud laden fluids must be placed between all cement plugs mixed at 25 sacks per 100 bbls of water.
10. All cement plugs will be a minimum of 100' in length or a minimum of 25 sacks of cement, whichever is greater. 50' of calculated cement excess required for inside casing plugs and 100% calculated cement excess required on outside casing plugs.
11. Class 'C' cement will be used above 7500 feet.
12. Class 'H' cement will be used below 7500 feet.
13. A cement plug is required to be set 50' above and 50' below, casing stubs, DV tools, attempted casing cut offs, cement tops outside casing, salt sections and anywhere the casing is perforated, these plugs require a 4 hour WOC and then will be tagged
14. All Casing Shoes Will Be Perforated 50' below shoe depth and Attempted to be Squeezed, cement needs to be 50' above and 50' Below Casing Shoe inside the Production Casing.
16. When setting the top out cement plug in production, intermediate and surface casing, wellbores should remain full at least 30 minutes after plugs are set
17. A CIBP is to be set within 100' of production perforations, capped with 100' of cement, WOC 4 hours and tag.
18. A CIBP with 35' of cement may be used in lieu of the 100' plug if set with a bailer. This plug will be placed within 100' of the top perforation, (WOC 4 hrs and tag).

19. No more than 3000' is allowed between cement plugs in cased hole and 2000' in open hole.
20. Some of the Formations to be isolated with cement plugs are: These plugs to be set to isolate formation tops
- A) Fusselman
  - B) Devonian
  - C) Morrow
  - D) Wolfcamp
  - E) Bone Springs
  - F) Delaware
  - G) Any salt sections
  - H) Abo
  - I) Glorieta
  - J) Yates.
  - K) Potash---(In the R-111-P Area (Potash Mine Area),  
A solid cement plug must be set across the salt section. Fluid used to mix the cement shall be saturated with the salts that are common to the section penetrated and in suitable proportions, not more than 3% calcium chloride (by weight of cement) will be considered the desired mixture whenever possible, WOC 4 hours and tag, this plug will be 50' below the bottom and 50' above the top of the Formation.
21. If cement does not exist behind casing strings at recommended formation depths, the casing can be cut and pulled with plugs set at recommended depths. If casing is not pulled, perforations will be shot and cement squeezed behind casing, WOC and tagged. These plugs will be set 50' below formation bottom to 50' above formation top inside the casing.

### **DRY HOLE MARKER REQUIREMENTS**

The operator shall mark the exact location of the plugged and abandoned well with a steel marker not less than four inches in diameter, 3' below ground level with a plate of at least ¼" welded to the top of the casing and the dry hole marker welded on the plate with the following information welded on the dry hole marker:

1. Operator name
2. Lease and Well Number
3. API Number
4. Unit letter
5. Quarter Section (feet from the North, South, East or West)
6. Section, Township and Range
7. Plugging Date
8. County

### **SPECIAL CASES -----AGRICULTURE OR PRARIE CHICKEN BREEDING AREAS**

In these areas, a below ground marker is required with all pertinent information mentioned above on a plate, set 3' below ground level, a picture of the plate will be supplied to NMOCD for record, the exact location of the marker (longitude and latitude by GPS) will be provided to NMOCD (We typically require a current survey to verify the GPS)

### **SITE REMEDIATION DUE WITHIN ONE YEAR OF WELL PLUGGING COMPLETION**

**Lovington Paddock Unit 139****30-025-31571****P&A Short Procedure for wells with rods and tubing.****Notes:**

- Limited well files available. NMOCD website indicates well was produced with pump, but tubing and rod details aren't documented
- Plan to investigate well prior to MIRU to ensure correct handling tools are available

**All cement plugs are based on 1.18 yield for Class H and 1.32 yield for Class C**

1. Call and notify NMOCD 24 hrs. before operations begin.
2. MIRU pulling unit.
3. Check well pressures, kill well as necessary following The Chevron Initial Well Kill Operating Guidelines.
  - a. Bubble test should be at least 30 minutes and follow the bubble test SOP. On all casing annuli, if bubble test fails Chevron intends to add contingency perforation/squeezes, cut and pull casing, or eliminate SCP with another means after the well is plugged to a certain point agreed upon by the NMOCD and Chevron.
  - b. Bubble tests should occur each morning, critical times are prior to pumping upper hydrocarbon plug or pumping cement to surface.
  - c. Perform a final bubble test after cement has hardened at surface.
4. Attempt to pressure test tubing to at least 1,000 psi for 15 minutes or the highest pressure expected while plugging the well.
  - a. If test passes, utilize tubing for work string.
  - b. If test fails, pick up a work string provided by Chevron.
5. Install hydraulic rod BOP and function test.
6. Pull and lay down rods.
  - a. If paraffin is encountered or rods are stuck contact engineer to discuss contingency
  - b. Rod stripping – if unable to back off rods and forced to cut rods, a hydraulic sheering tool or hacksaw, or other verified, intrinsically safe devices SHALL be used to cut.
7. N/U BOPE using rubber coated hangers provided by Chevron, and pressure test, 250 psi low and 1,000 psi or MASP (per Chevron operating guidelines) for 5 minutes each.
  - a. On a chart, no bleed off allotted.
  - b. Contact engineer if unable to unset TAC, do not shear TAC without the BOP N/U first to mitigate any risks of well control events.
8. If tubing pressure tested, stand back pipe. If it failed, lay down and prepare to run a work string.
9. MIRU wireline and lubricator.
10. Pressure test lubricator to 500 psi or MASP (whichever is larger) for 10 minutes.
  - a. If MASP is greater than 1,000 psi, contact the engineer to discuss running grease injection.
11. Run and set CIBP per approved by C103
  - a. Skip gauge run if TAC pulled freely past setting depth.


12. Fill well with fresh water and pressure test casing to 500 psi for 15 minutes if no P&S required or 1,000 psi for 15 minutes if P&S required.
  - a. Confirm burst pressure of each casing string and ensure the bottomhole pressure during a pressure test does not exceed burst.
  - b. 5% bleed off allotted.
  - c. Contact the engineer if pressure test fails to discuss upgrading existing cement plugs to isolate holes, document test results.
13. Perform 30-minute bubble test on all casing strings. Record results. Adjust forward plan as necessary to address SCP.
14. TIH and tag CIBP.
15. Spot MLF, subtracting cement volumes. Do not place MLF until casing pressure tests or above first Perf and Squeezes. If casing pressure test failed in previous job steps, Chevron requires all casing holes/damage to be covered with cement.
16. Spot 26 sacks Class C cement from 6000' to 5750'.
17. Spot 41 sacks Class C cement from 4592' to 4200'.
18. Spot 29 sacks Class C cement from 2121' to 1850'.
19. Spot 26 sacks Class C cement from 1350' to 1100'.
20. Conduct 30 minute bubble test on all annuli. If bubble test fails:
  - a. Perforate at 650' and attempt to circulate
  - b. If able to circulate, plan to rig down/move off temporarily and add to casing cut/pull well queue. A separate procedure will be provided for the casing cut/pull queue of wells at a later date.
  - c. If well DOES NOT circulate, plan to spot cement plug from 50' below perforations to 50' above perforations and move off temporarily to schedule offline CBL. Develop forward plan, which is dependent on CBL results.
21. Proceed to next job steps only after verifying a passing bubble test
22. Spot 26 sacks Class C cement from 250' to 0'.
23. While RDMO, perform 30-minute bubble test on surface and production casings. Record results to meet the barrier standard intent.
24. Cut all casings & anchors & remove 3' below grade. Verify cement to surface & weld on dry hole marker (4" diameter, 4' tall). Clean location.

Note: All cement plugs class "C" (<7,500') or "H" (>7,500') with closed loop system used, and MLF spotted between plugs.

Created:	<u>04/23/19</u>	By:	<u>                    </u>
Updated:	<u>                    </u>	By:	<u>                    </u>
Lease:	<u>Lovington Paddock Unit</u>		
Field:	<u>Lovington</u>		
Surf. Loc.:	<u>2527 FNL &amp; 1550 FWL</u>		
Bot. Loc.:	<u>                                    </u>		
County:	<u>Lea</u>	St.:	<u>NM</u>
Status:	<u>                                    </u>		

Well #:	139	St. Lse:	
API	30-025-31571		
Unit Ltr.:	F	Section:	1
TSHP/Rng:	17S-36E		
Unit Ltr.:		Section:	
TSHP/Rng:			
Directions:	Lovington, NM		
Chevno:	OS6099		

Size:	5-1/2"
Wt., Grd.:	15.5#
Depth:	6450'
Sxs Cmt:	900
Circulate:	Yes
TOC:	Surface
Hole Size:	7-7/8"

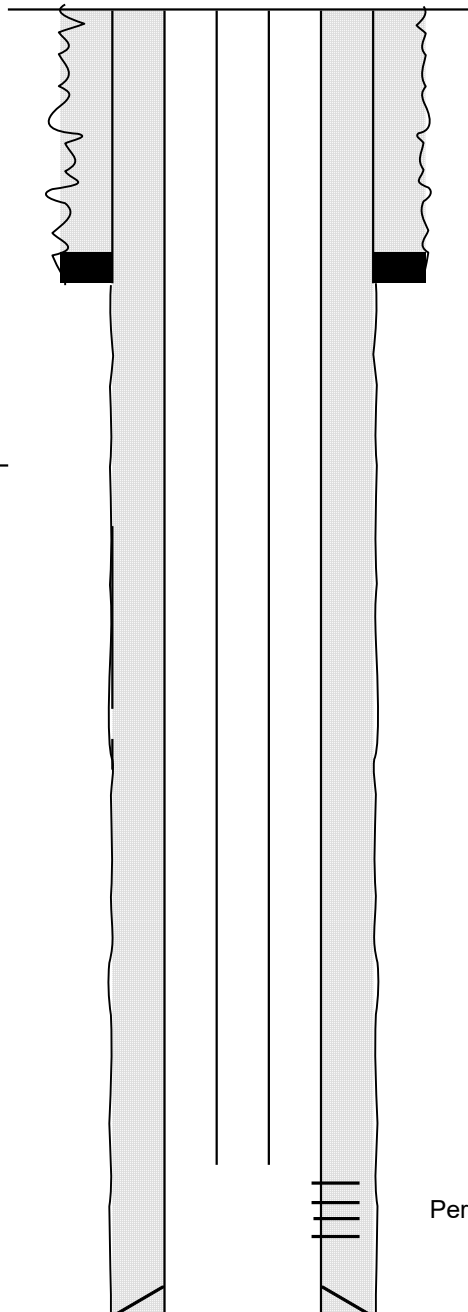
$$\begin{array}{r} \text{PBSD(est.): } 6,402 \\ \text{TD: } 6,450 \end{array}$$

## Proposed Wellbore Diagram

Created: 04/23/19 By: \_\_\_\_\_  
 Updated: \_\_\_\_\_ By: \_\_\_\_\_  
 Lease: Lovington Paddock Unit  
 Field: Lovington  
 Surf. Loc.: 2527 FNL & 1550 FWL  
 Bot. Loc.: \_\_\_\_\_  
 County: Lea St.: NM  
 Status: \_\_\_\_\_

Well #: 139 St. Lse: \_\_\_\_\_  
 API: 30-025-31571  
 Unit Ltr.: F Section: 1  
 TSHP/Rng: 17S-36E  
 Unit Ltr.: \_\_\_\_\_ Section: \_\_\_\_\_  
 TSHP/Rng: \_\_\_\_\_  
 Directions: Lovington, NM  
 Chevno: OS6099

## Surface Casing


Size: 8-5/8"  
 Wt., Grd.: 24#  
 Depth: 1300'  
 Sxs Cmt: 550  
 Circulate: Yes  
 TOC: Surface  
 Hole Size: 12-1/4"

KB: \_\_\_\_\_  
 DF: \_\_\_\_\_  
 GL: 3,829  
 Ini. Spud: 04/17/92  
 Ini. Comp.: 05/14/92

## Production Casing

Size: 5-1/2"  
 Wt., Grd.: 15.5#  
 Depth: 6450'  
 Sxs Cmt: 900  
 Circulate: Yes  
 TOC: Surface  
 Hole Size: 7-7/8"

Rustler	1,972
Salt	2,071
Tansil	2,887
Seven Rivers	3,283
Queen	3,881
Grayburg	4,318
San Andres	4,592
Glorieta	5,963
Paddock	6,041

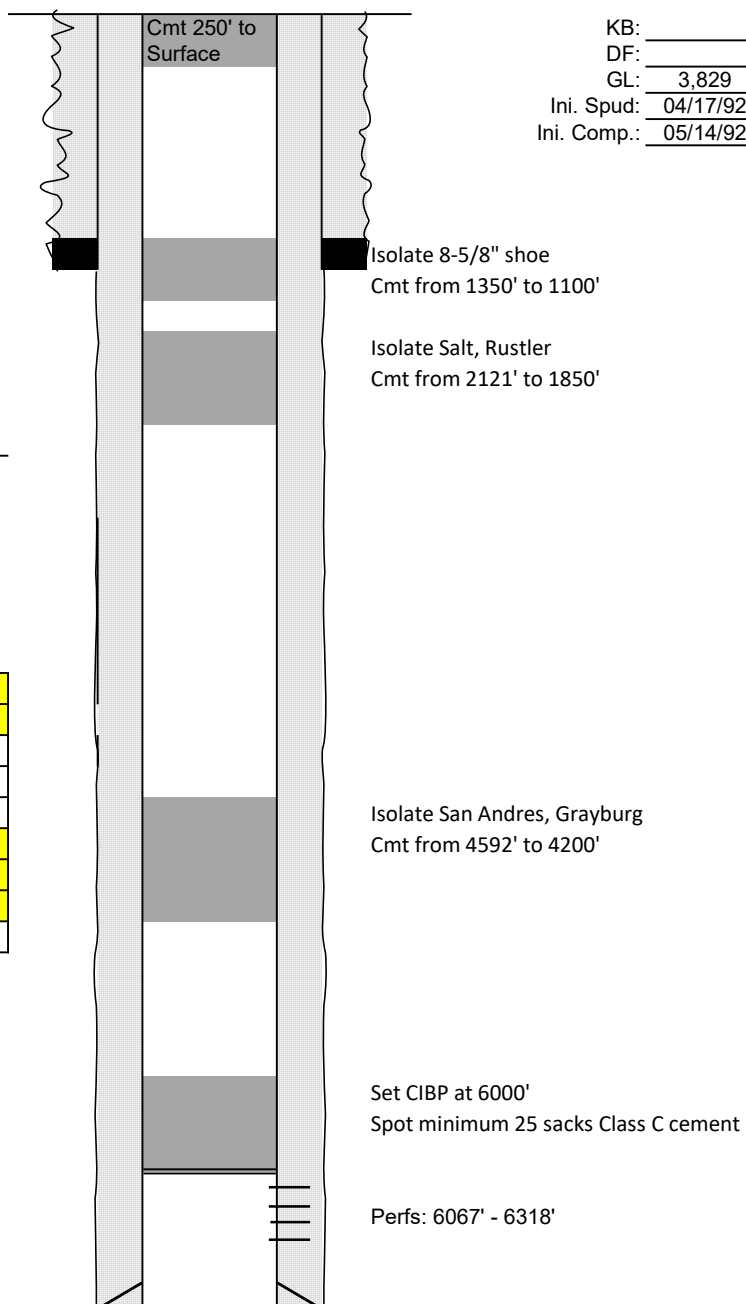

PBTD(est.): 6,402  
 TD: 6,450

**District I**  
1625 N. French Dr., Hobbs, NM 88240  
Phone:(575) 393-6161 Fax:(575) 393-0720  
**District II**  
811 S. First St., Artesia, NM 88210  
Phone:(575) 748-1283 Fax:(575) 748-9720  
**District III**  
1000 Rio Brazos Rd., Aztec, NM 87410  
Phone:(505) 334-6178 Fax:(505) 334-6170  
**District IV**  
1220 S. St Francis Dr., Santa Fe, NM 87505  
Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico  
Energy, Minerals and Natural Resources  
Oil Conservation Division  
1220 S. St Francis Dr.  
Santa Fe, NM 87505

COMMENTS

Action 151630

COMMENTS

Operator: CHEVRON U S A INC 6301 Deauville Blvd Midland, TX 79706	OGRID: 4323
	Action Number: 151630
	Action Type: [C-103] NOI Plug & Abandon (C-103F)

COMMENTS

Created By	Comment	Comment Date
plmartinez	DATA ENTRY PM	12/19/2022

**District I**

1625 N. French Dr., Hobbs, NM 88240  
Phone:(575) 393-6161 Fax:(575) 393-0720

**District II**

811 S. First St., Artesia, NM 88210  
Phone:(575) 748-1283 Fax:(575) 748-9720

**District III**

1000 Rio Brazos Rd., Aztec, NM 87410  
Phone:(505) 334-6178 Fax:(505) 334-6170

**District IV**

1220 S. St Francis Dr., Santa Fe, NM 87505  
Phone:(505) 476-3470 Fax:(505) 476-3462

**State of New Mexico**  
**Energy, Minerals and Natural Resources**  
**Oil Conservation Division**  
**1220 S. St Francis Dr.**  
**Santa Fe, NM 87505**

CONDITIONS

Action 151630

## CONDITIONS

Operator: CHEVRON U S A INC 6301 Deauville Blvd Midland, TX 79706	OGRID: 4323
	Action Number: 151630
	Action Type: [C-103] NOI Plug & Abandon (C-103F)

## CONDITIONS

Created By	Condition	Condition Date
kfortner	See attached COA Note changes to procedure	12/16/2022