

District I
1625 N. French Dr., Hobbs, NM 88240

District II
811 S. First St., Artesia, NM 88210

District III
1000 Rio Brazos Rd., Aztec, NM 87410

District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy, Minerals & Natural Resources

Oil Conservation Division
1220 South St. Francis Dr.
Santa Fe, NM 87505

Form C-104
Revised August 1, 2011

Submit one copy to appropriate District Office

☐ AMENDED REPORT

I. REQUEST FOR ALLOWABLE AND AUTHORIZATION TO TRANSPORT

¹ Operator name and Address OXY USA INC. P.O. BOX 50250 MIDLAND, TX 79710		² OGRID Number: 16696
		³ Reason for Filing Code/ Effective Date - NW- 03/06/2023
⁴ API Number 30-015-46462	⁵ Pool Name WC-015 G-08 S233135D; WOLFCAMP	⁶ Pool Code 98236
⁷ Property Code: 326187	⁸ Property Name: PRECIOUS 30-18 FEDERAL COM	⁹ Well Number: 176H

II. ¹⁰ Surface Location

Ul or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South Line	Feet from the	East/West line	County
A	31	23S	31E		520	NORTH	1030	EAST	EDDY

¹¹ Bottom Hole Location FTP: 134' FSL 394' FEL LTP: 2320' FSL 380' FEL

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
I	18	23S	31E		2599	SOUTH	372	EAST	EDDY
¹² Lse Code F	¹³ Producing Method Code : F		¹⁴ Gas Connection Date: 3/8/23		¹⁵ C-129 Permit Number		¹⁶ C-129 Effective Date		¹⁷ C-129 Expiration Date

III. Oil and Gas Transporters

¹⁸ Transporter OGRID	¹⁹ Transporter Name and Address	²⁰ O/G/W
237722	CENTURION PIPELINE L.P.	O
151618	ENTERPRISE FIELD SERVICES LLC	G

IV. Well Completion Data

²¹ Spud Date 10/23/22	²² Ready Date 03/06/23	²³ TD 24717'M 11362'V	²⁴ PBSD 24672'M 11364'V	²⁵ Perforations 11663-24436'	²⁶ DHC, MC
²⁷ Hole Size	²⁸ Casing & Tubing Size		²⁹ Depth Set		³⁰ Sacks Cement
17-1/2"	13-3/8"		427'		505
12-1/4"	9-5/8"		4184'		1272
8-3/4"	7-5/8"		10780'		355
6-3/4"	5-1/2"		24697'		1065

V. Well Test Data

³¹ Date New Oil 3/9/23	³² Gas Delivery Date 3/8/23	³³ Test Date 4/1/23	³⁴ Test Length 24 HRS	³⁵ Tbg. Pressure	³⁶ Csg. Pressure 1439
³⁷ Choke Size 60/128	³⁸ Oil 3695	³⁹ Water 5284	⁴⁰ Gas 7335		⁴¹ Test Method F

⁴² I hereby certify that the rules of the Oil Conservation Division have been complied with and that the information given above is true and complete to the best of my knowledge and belief.

Signature: 

Printed name:
JANA MENDIOLA

Title:
SR. REGULATORY ANALYST

E-mail Address:
Janalyn_mendiola@oxy.com

Date:
06/04/2023

Phone:
432-685-5936

OIL CONSERVATION DIVISION

Approved by:

PATRICIA MARTINEZ

Title: **PETROLEUM SPECIALIST**

Approval Date: **6/8/2023**

1625 N. French Dr., Hobbs, NM 88240
 Phone: (575) 393-6161 Fax: (575) 393-0720
District II
 811 S. First St., Artesia, NM 88210
 Phone: (575) 748-1283 Fax: (575) 748-9720
District III
 1000 Rio Brazos Road, Aztec, NM 87410
 Phone: (505) 334-6178 Fax: (505) 334-6170
District IV
 1220 S. St. Francis Dr., Santa Fe, NM 87505
 Phone: (505) 476-3460 Fax: (505) 476-3462

State of New Mexico
 Energy, Minerals & Natural Resources Department
OIL CONSERVATION DIVISION
 1220 South St. Francis Dr.
 Santa Fe, NM 87505

Revised August 1, 2011
 Submit one copy to appropriate
 District Office

☒ AMENDED REPORT

WELL LOCATION AND ACREAGE DEDICATION AS-DRILLED PLAT

¹ API Number 30-015-46462	² Pool Code 98236	³ Pool Name WC-015 G-08 S233135D; WOLFCAMP
⁴ Property Code 326187	Property Name PRECIOUS 30-18 FED COM	
⁷ OGRID No. 16696	⁸ Operator Name OXY USA INC.	⁶ Well Number 176H
		⁹ Elevation 3347'

¹⁰ Surface Location

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
A	31	23S	31E		520	NORTH	1030	EAST	EDDY
¹¹ Bottom Hole Location If Different From Surface									
UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
I	18	23S	31E		2599	SOUTH	372	EAST	EDDY
¹² Dedicated Acres 800.0	¹³ Joint or Infill	¹⁴ Consolidation Code	¹⁵ Order No.						

No allowable will be assigned to this completion until all interests have been consolidated or a non-standard unit has been approved by the division.

SECTION 11 SECTION 12 SECTION 13 SECTION 14 SECTION 15 SECTION 16 SECTION 17 SECTION 18 SECTION 19 SECTION 20 SECTION 21 SECTION 22 SECTION 23 SECTION 24 SECTION 25 SECTION 26 SECTION 27 SECTION 28 SECTION 29 SECTION 30 SECTION 31 SECTION 32 SECTION 33 SECTION 34 SECTION 35 SECTION 36 T23S R30E T23S R31E SHL KOP FTP LTP BHL 520' 359' 134' 357' 394' 1030' 301' 2320' 2599' 372' 380' 47' 326' NEAREST TO LEASE MD = 18154' FURTHEST FROM LEASE MD = 11663' SHEET 1 OF 1 JOB No. R4111_021 REV 0 BM 3/3/2023	CORNER COORDINATES NAD 83, SPCS NM EAST A - X: 703525.47' / Y: 474895.82' B - X: 703536.94' / Y: 472249.54' C - X: 703555.83' / Y: 469616.48' D - X: 703570.80' / Y: 466975.08' E - X: 703585.01' / Y: 464333.57' F - X: 703599.62' / Y: 461692.37' G - X: 700956.71' / Y: 461680.43' H - X: 700928.18' / Y: 466962.44' I - X: 700898.48' / Y: 472240.98' J - X: 700884.47' / Y: 474884.09' CORNER COORDINATES NAD 27, SPCS NM EAST A - X: 662342.31' / Y: 474836.19' B - X: 662353.70' / Y: 472189.97' C - X: 662372.51' / Y: 469556.98' D - X: 662387.40' / Y: 466915.65' E - X: 662401.54' / Y: 464274.20' F - X: 662416.07' / Y: 461633.08' G - X: 659773.17' / Y: 461621.13' H - X: 659744.79' / Y: 466903.01' I - X: 659715.25' / Y: 472181.41' J - X: 659701.32' / Y: 474824.45'	17 OPERATOR CERTIFICATION I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief, and that this organization either owns a working interest or unleased mineral interest in the land including the proposed bottom hole location or has a right to drill this well at this location pursuant to a contract with an owner of such a mineral or working interest, or to a voluntary pooling agreement or a compulsory pooling order heretofore entered by the division. 03/05/23 Signature _____ Date _____ JANA MENDIOLA Printed Name janalyn_mendiola@oxy.com E-mail Address	
	BOTTOM HOLE LOCATION 2599' FSL 372' FEL, SECTION 18 24717' MEASURED DEPTH IN FEET NAD 83, SPCS NM EAST X: 703153.92' / Y: 474847.66' LAT: 32.30434285N / LON: 103.80959053W NAD 27, SPCS NM EAST X: 661970.76' / Y: 474788.03' LAT: 32.30422013N / LON: 103.80910299W	LAST TAKE POINT 2320' FSL 380' FEL, SECTION 18 24436' MEASURED DEPTH IN FEET NAD 83, SPCS NM EAST X: 703147.10' / Y: 474567.83' LAT: 32.30357376N / LON: 103.80961703W NAD 27, SPCS NM EAST X: 661963.93' / Y: 474508.20' LAT: 32.30345103N / LON: 103.80912952W	18 SURVEYOR CERTIFICATION I hereby certify that the well surface location shown on this plat was plotted from field notes of the as-staked surveys made by me or under my supervision, and that the same is true and correct to the best of my belief. Data used for underground measurements were provided by others for reference only and does not constitute field measurements performed by R-Squared Global. March 3, 2023 Date of Survey Signature and Seal of Professional Surveyor _____ David W. Myers 11403 Certificate Number
	FIRST TAKE POINT 134' FSL 394' FEL, SECTION 30 11663' MEASURED DEPTH IN FEET NAD 83, SPCS NM EAST X: 703204.87' / Y: 461824.57' LAT: 32.26854476N / LON: 103.80963141W NAD 27, SPCS NM EAST X: 662021.33' / Y: 461765.27' LAT: 32.26842181N / LON: 103.80914529W	KICK OFF POINT 359' FNL 357' FEL, SECTION 31 10843' MEASURED DEPTH IN FEET NAD 83, SPCS NM EAST X: 703245.14' / Y: 461331.50' LAT: 32.26718888N / LON: 103.80950893W NAD 27, SPCS NM EAST X: 662061.58' / Y: 461272.21' LAT: 32.26706593N / LON: 103.80902287W	SURFACE HOLE LOCATION 520' FNL 1030' FEL, SECTION 31 0' MEASURED DEPTH IN FEET NAD 83, SPCS NM EAST X: 702572.80' / Y: 461167.80' LAT: 32.26674791N / LON: 103.81168667W NAD 27, SPCS NM EAST X: 661389.23' / Y: 461108.52' LAT: 32.26662496N / LON: 103.81120057W
	DAVID W. MYERS NEW MEXICO PROFESSIONAL SURVEYOR 11403		

Distances/areas relative to NAD 83 Combined Scale Factor: 0.99977803 Convergence Angle: 0.275672




OXY



Borehole:			Well:			Field:			Structure:						
Precious 30-18 Federal Com 176H			Precious 30-18 Federal Com 176H			NM Eddy County (NAD 83)			Oxy Precious 30-18 Federal Com Pad (Citadel 3)						
Gravity & Magnetic Parameters						Surface Location			NAD83 New Mexico State Plane, Eastern Zone, US Feet			Miscellaneous			
Model: IFR1		Dip: 59.932°		Date: 24-Dec-2022		Lat: N 32 16 0.29		Northing: 461167.8HUS		Grid Conv: 0.2785°		Slot: Precious 30-18 Federal Com 176H		TVD Ref: RKB(3371.6ft above MSL)	
MagDec: 6.77°		FS: 47626.4nT		Gravity FS: 998.452mgN (9.80665 Based)		Lon: W 103 48 42.07		Easting: 702572.8HUS		Scale Fact: 0.99993886		Plan: Oxy Precious 30-18 Federal Com 176H Gyro+MWD to 24717MD			

Critical Points

Critical Point	MD	INCL	AZIM	TVD	VSEC	N(+)/S(-)	E(+)/W(-)	DLS
WRP	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
SHL	24.00	0.00	0.00	24.00	0.00	0.00	0.00	0.00
First Gyro Survey	96.00	0.35	106.30	96.00	-0.05	-0.06	0.21	0.49
Last Gyro Survey	376.00	0.62	140.96	375.99	-0.92	-1.02	2.24	0.40
First 3rd Party MWD Survey	527.00	1.82	156.95	526.95	-3.69	-3.86	3.70	0.82
Last 3rd Party MWD Survey	10672.00	0.18	46.54	10614.86	192.52	162.45	671.41	0.21
First SLB Survey	10812.00	0.42	56.56	10754.86	192.98	162.88	672.00	0.17
Actual KOP	10843.00	2.94	17.96	10785.84	193.81	163.70	672.34	8.46
Wolfcamp Intersection	11479.86	56.09	347.78	11294.60	528.91	500.12	650.57	6.18
FTP / 100ft FSL Crossing	11625.00	61.74	356.24	11369.60	650.91	623.01	633.46	6.41
Exit Lateral Window	18015.52	90.01	7.77	11441.87	7014.81	6991.25	680.61	5.91
Enter Lateral Window	18495.24	90.00	357.07	11448.17	7493.20	7470.25	677.89	1.17
Exit Lateral Window	20589.76	90.35	355.76	11442.17	9579.37	9562.45	591.22	1.12
Enter Lateral Window	21027.79	89.08	0.15	11437.06	10016.62	10000.25	588.78	0.74
Exit Lateral Window	24012.86	88.52	352.22	11374.98	12990.05	12977.45	572.10	2.50
Enter Lateral Window	24343.51	90.93	2.52	11374.19	13319.83	13307.65	570.29	0.47
LTP / 100ft FNL Crossing	24663.00	92.59	0.44	11364.63	13639.12	13626.79	580.89	1.27
Final MWD Survey	24680.00	92.69	0.25	11363.85	13656.09	13643.77	581.00	1.27
Proj to TD	24717.00	92.69	0.25	11362.11	13693.02	13680.73	581.16	0.00

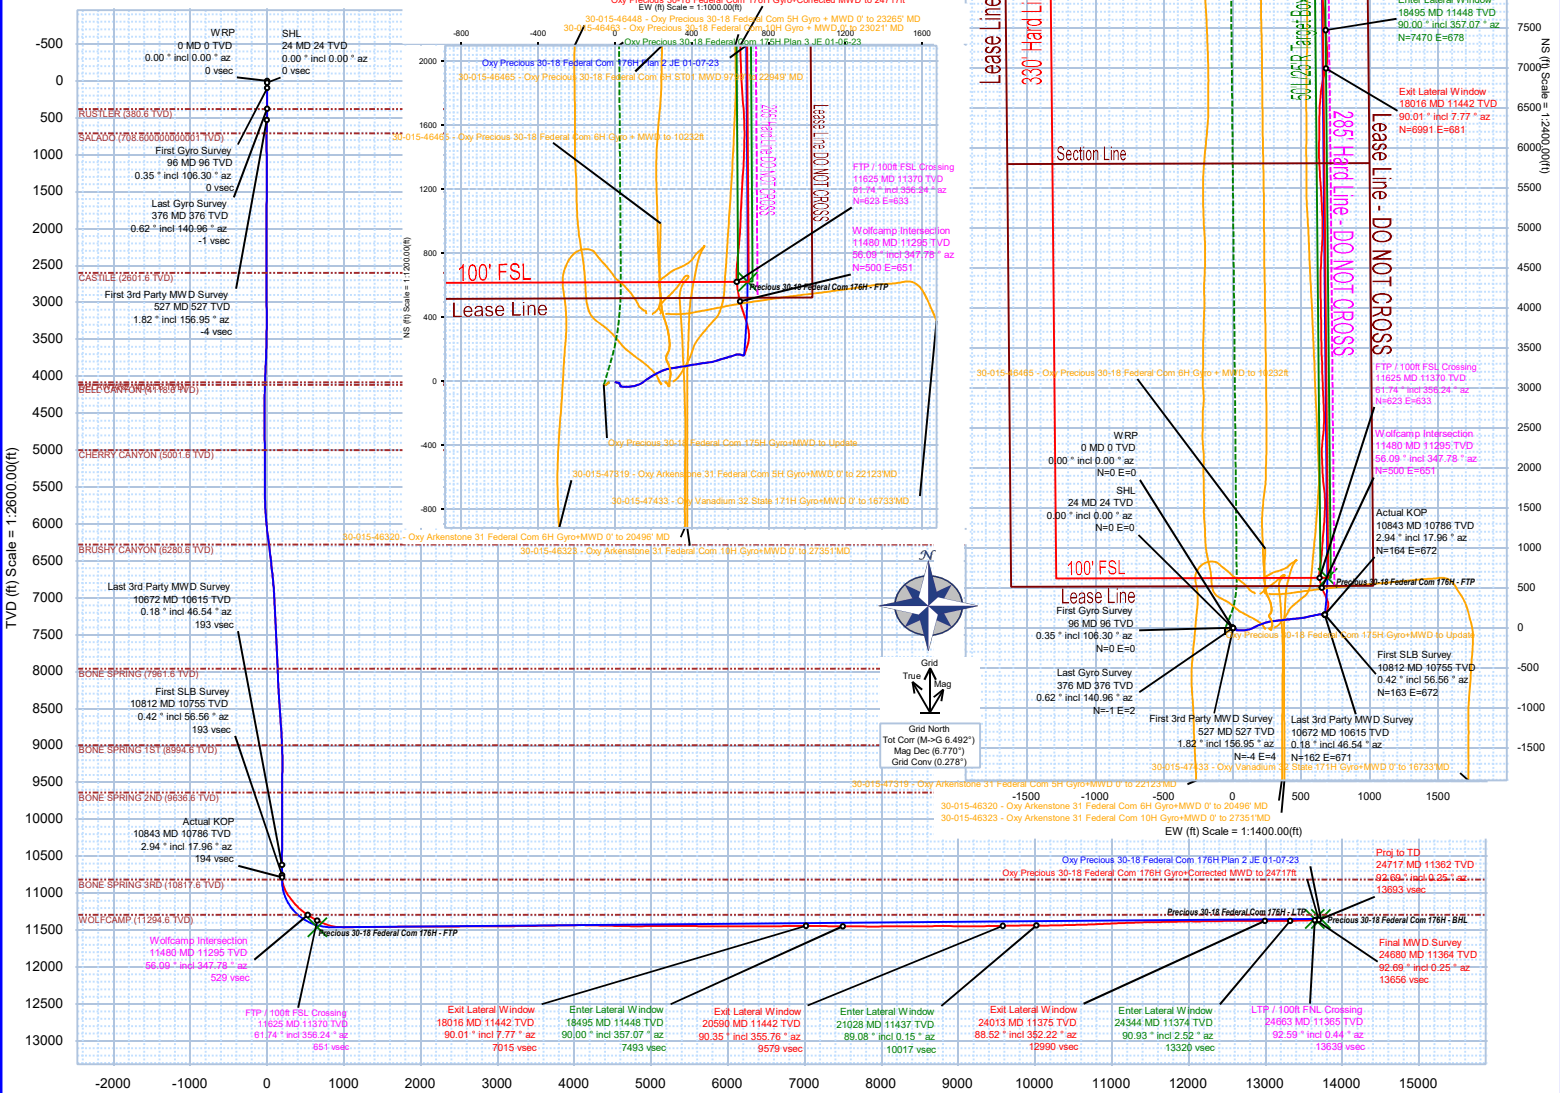



Oxy Precious 30-18 Federal Com 176H Gyro+MWD to 24717'MD Survey Geodetic Report (Def Survey)



Report Date: January 26, 2023 - 09:55 AM Client: OXY Field: NM Eddy County (NAD 83) Structure / Slot: Oxy Precious 30-18 Federal Com Pad (Citadel 3) / Precious 30-18 Federal Com 176H Well: Precious 30-18 Federal Com 176H Borehole: Precious 30-18 Federal Com 176H UWI / API#: Unknown / Unknown Survey Name: Oxy Precious 30-18 Federal Com 176H Gyro+MWD to 24717'MD Survey Date: January 04, 2023 Tort / AHD / DDI / ERD Ratio: 381.542 " / 14302.952 ft / 7.071 / 1.248 COORDINATE Reference System: NAD83 New Mexico State Plane, Eastern Zone, US Feet Location Lat / Long: N 32° 16' 0.29248", W 103° 48' 42.07200" Location Grid N/E Y/X: N 461167.800 ftUS, E 702572.800 ftUS CRS Grid Convergence Angle: 0.2785 ° Grid Scale Factor: 0.99993886 Version / Patch: 2.10.829.1	Survey / DLS Computation: Minimum Curvature / Lubinski Vertical Section Azimuth: 2.581 ° (Grid North) Vertical Section Origin: 0.000 ft, 0.000 ft TVD Reference Datum: RKB = 24' TVD Reference Elevation: 3371.600 ft above MSL Seabed / Ground Elevation: 3347.600 ft above MSL Magnetic Declination: 6.770 ° Total Gravity Field Strength: 998.4521mgn (9.80665 Based) Gravity Model: GARM Total Magnetic Field Strength: 47626.400 nT Magnetic Dip Angle: 59.932 ° Declination Date: December 24, 2022 Magnetic Declination Model: IFR1 North Reference: Grid North Grid Convergence Used: 0.2800 ° Total Corr Mag North->Grid North: 6.4900 ° Local Coord Referenced To: Well Head	
--	--	--

Comments	MD (ft)	Incl (°)	Azim Grid (°)	TVD (ft)	VSEC (ft)	NS (ft)	EW (ft)	DLS (°/100ft)	Closure (ft)	Closure Azimuth (°)	Northing (ftUS)	Easting (ftUS)	Latitude (N/S °)	Longitude (E/W °)
WRP	0.00	0.00	0.00	0.00	0.00	0.00	0.00	N/A	0.00	0.00	461167.80	702572.80	N 32.266748	W 103.811687
SHL	24.00	0.00	0.00	24.00	0.00	0.00	0.00	0.00	0.00	0.00	461167.80	702572.80	N 32.266748	W 103.811687
First Gyro Survey	96.00	0.35	106.30	96.06	-0.06	0.21	0.49	0.22	106.30	0.22	461167.74	702573.01	N 32.266748	W 103.811686
	116.00	0.45	113.42	116.00	-0.09	-0.11	0.34	0.56	107.85	0.36	461167.69	702573.14	N 32.266748	W 103.811686
	166.00	0.69	112.88	166.00	-0.27	-0.31	0.80	0.48	108.86	0.86	461167.49	702573.60	N 32.266747	W 103.811684
	216.00	0.41	107.03	215.99	-0.42	-0.47	1.25	0.57	1.33	110.83	461167.33	702574.05	N 32.266747	W 103.811683
	266.00	0.26	106.77	265.99	-0.49	-0.56	1.53	0.30	1.63	110.13	461167.24	702574.33	N 32.266746	W 103.811682
Last Gyro Survey First 3rd Party MWD Survey	316.00	0.43	108.52	315.99	-0.57	-0.65	1.81	0.34	1.93	109.77	461167.15	702574.61	N 32.266746	W 103.811681
	366.00	0.66	140.82	365.99	-0.84	-0.92	2.17	0.75	2.37	113.27	461166.87	702574.97	N 32.266745	W 103.811680
	376.00	0.62	140.96	375.99	-0.92	-1.02	2.24	0.40	2.47	114.47	461166.78	702575.04	N 32.266745	W 103.811679
	527.00	1.82	156.95	526.95	-3.69	-3.86	3.70	0.82	5.35	136.25	461163.94	702576.50	N 32.266737	W 103.811675
	622.00	1.48	147.46	621.91	-6.06	-6.29	4.95	0.46	8.00	141.79	461161.52	702577.75	N 32.266731	W 103.811671
	714.00	1.07	129.02	713.89	-7.54	-7.83	6.25	0.63	10.02	141.37	461159.97	702579.05	N 32.266726	W 103.811667
	808.00	0.77	71.51	807.88	-7.83	-8.18	7.54	0.98	11.12	137.35	461159.62	702580.34	N 32.266725	W 103.811662
	902.00	0.71	78.09	901.87	-7.46	-7.86	8.70	0.71	11.73	132.08	461159.94	702581.50	N 32.266726	W 103.811659
	995.00	0.66	90.18	994.87	-7.20	-7.65	9.80	0.36	12.43	127.98	461160.15	702582.60	N 32.266727	W 103.811655
	1089.00	0.74	86.01	1088.86	-7.01	-7.51	10.94	0.11	13.27	124.50	461160.29	702583.73	N 32.266727	W 103.811651
	1155.00	0.67	85.07	1154.85	-6.92	-7.45	11.74	0.11	13.91	122.39	461160.35	702584.54	N 32.266727	W 103.811649
	1249.00	0.55	86.64	1248.85	-6.80	-7.38	12.74	0.13	14.72	120.07	461160.42	702585.54	N 32.266727	W 103.811646
	1342.00	0.57	91.39	1341.84	-6.74	-7.36	13.65	0.05	15.51	118.34	461160.44	702586.45	N 32.266727	W 103.811643
	1436.00	0.58	100.34	1435.84	-6.80	-7.46	14.59	0.10	16.38	117.09	461160.34	702587.39	N 32.266727	W 103.811640
	1530.00	0.71	103.44	1529.83	-6.97	-7.68	15.62	0.14	17.41	116.18	461160.12	702588.42	N 32.266727	W 103.811636
	1625.00	0.67	109.04	1624.83	-7.24	-8.00	16.72	0.08	18.53	115.57	461159.80	702589.52	N 32.266726	W 103.811633
	1719.00	0.70	111.43	1718.82	-7.58	-8.39	17.77	0.04	19.65	115.26	461159.41	702590.57	N 32.266725	W 103.811629
	1814.00	0.74	109.99	1813.81	-7.95	-8.81	18.89	0.05	20.84	115.00	461158.99	702591.69	N 32.266723	W 103.811626
	1909.00	0.78	112.26	1908.80	-8.35	-9.26	20.06	0.05	22.10	114.78	461158.54	702592.86	N 32.266722	W 103.811622
	2004.00	0.78	111.53	2003.80	-8.78	-9.75	21.26	0.01	23.39	114.62	461158.05	702594.06	N 32.266721	W 103.811618
	2099.00	0.84	107.60	2098.79	-9.17	-10.19	22.53	0.09	24.73	114.35	461157.61	702595.33	N 32.266720	W 103.811614
	2193.00	0.84	114.45	2192.78	-9.60	-10.69	23.81	0.11	26.10	114.17	461157.11	702596.61	N 32.266718	W 103.811610
	2288.00	0.61	117.13	2287.77	-10.07	-11.21	24.90	0.24	27.30	114.23	461156.59	702597.70	N 32.266717	W 103.811606
	2382.00	0.36	311.50	2381.77	-10.10	-11.24	25.12	1.02	27.52	114.10	461156.56	702597.92	N 32.266717	W 103.811606
	2571.00	0.46	330.76	2570.76	-9.08	-10.18	24.31	0.09	26.35	112.73	461157.62	702597.10	N 32.266720	W 103.811608
	2760.00	0.38	303.85	2759.76	-8.11	-9.17	23.41	0.11	25.15	111.39	461158.63	702596.21	N 32.266722	W 103.811611
	2855.00	0.31	303.56	2854.76	-7.81	-8.90	22.94	0.07	24.59	111.11	461158.95	702595.74	N 32.266723	W 103.811613
	2950.00	0.38	294.12	2949.75	-7.56	-8.68	22.44	0.09	24.02	110.94	461159.22	702596.24	N 32.266724	W 103.811614
	3045.00	0.48	292.07	3044.75	-7.32	-8.31	21.78	0.11	23.31	110.87	461159.49	702594.58	N 32.266725	W 103.811616
	3139.00	0.55	288.67	3138.75	-7.06	-8.01	20.99	0.08	22.47	110.90	461159.79	702593.79	N 32.266726	W 103.811619
	3234.00	0.51	286.15	3233.74	-6.83	-7.75	20.15	0.05	21.59	111.04	461160.05	702592.95	N 32.266726	W 103.811622
	3329.00	0.26	170.80	3328.74	-6.95	-7.84	19.78	0.70	21.28	111.63	461159.96	702592.58	N 32.266726	W 103.811623
	3423.00	0.87	156.64	3422.74	-7.80	-8.71	20.10	0.66	21.90	113.43	461159.09	702592.90	N 32.266724	W 103.811622
	3518.00	0.85	167.60	3517.72	-8.16	-9.10	20.89	0.38	23.02	116.01	461157.70	702593.49	N 32.266720	W 103.811620
	3613.00	1.65	152.34	3612.70	-11.05	-12.03	21.63	0.74	24.75	119.09	461155.77	702594.43	N 32.266715	W 103.811617
	3707.00	2.29	153.07	3706.64	-13.85	-14.91	23.11	0.68	27.50	122.82	461152.89	702595.91	N 32.266707	W 103.811612
	3802.00	2.56	154.54	3801.56	-17.38	-18.51	24.88	0.29	31.02	126.65	461149.29	702597.68	N 32.266697	W 103.811606
	3897.00	2.18	164.06	3896.48	-20.96	-22.17	26.29	0.57	34.39	130.14	461145.63	702599.09	N 32.266687	W 103.811602
	3991.00	2.02	170.11	3990.41	-24.27	-25.52	27.07	0.29	37.20	133.31	461142.28	702599.67	N 32.266677	W 103.811600
	4086.00	1.80	174.38	4085.36	-27.95	-29.30	28.59	0.28	39.72	136.18	461139.15	702600.30	N 32.266669	W 103.811598
	4133.00	1.75	174.09	4132.34	-28.83	-30.10	27.65	0.11	40.87	137.43	461137.70	702600.45	N 32.266665	W 103.811598
	4242.00	1.93	168.58	4241.28	-32.25	-33.56	28.18	0.23	43.82	139.98	461134.25	702600.98	N 32.266655	W 103.811596
	4338.00	0.37	5.32	4337.27	-33.51	-34.83	28.53	2.38	45.03	140.68	461132.97	702601.33	N 32.266652	W 103.811595
	4433.00	0.22	354.93	4432.27	-33.03	-34.35	28.54	0.17	44.66	140.27	461133.46	702601.34	N 32.266653	W 103.811595
	4527.00	0.15	226.20	4526.27	-32.94	-34.25	28.44	0.36	44.52	140.30	461133.55	702601.24	N 32.266653	W 103.811595
	4622.00	0.22	74.49	4621.27	-34.22	-34.29	28.52	0.38	44.60	139.18	461133.51	702601.32	N 32.266653	W 103.811595
	4716.00	0.09	311.78	4715.27	-32.87	-34.19	28.64	0.30	44.60	140.05	461133.61	702601.44	N 32.266654	W 103.811595
	4810.00	0.29	354.70	4809.27	-32.58	-33.90	28.65	0.25	44.33	139.88	461133.90	702601.36	N 32.266654	W 103.811595
	4905.00	0.46	349.41	4904.26	-31.97	-33.29	28.47	0.18	43.81	139.46	461134.51	702601.27	N 32.266656	W 103.811595
	5000.00	0.29	321.88	4999.26	-31.42	-32.73	28.26	0.26	43.24	139.19	461135.08	702601.05	N 32.266658	W 103.811596
	5094.00	0.91	79.70	5093.26	-31.07	-32.41	28.81	1.15	43.38	138.33	461135.40	702601.64	N 32.266658	W 103.811594
	5188.00	0.80	74.69	5187.23	-30.71	-31.77	31.17	1.54	44.82	138.94	461135.60	702603.97	N 32.266659	W 103.811586
	5283.00	3.61	94.85	5282.11	-30.75	-32.08	35.75	1.43	48.24	137.37	461135.41	702603.55	N 32.266658	W 103.811572
	5377.00	5.10	95.53	5375.84	-31.08	-33.04	42.86	1.59	54.12	127.63	461134.76	702615.66	N 32.266657	W 103.811549
	5472.00	6.66	91.65	5470.34	-31.21	-33.61	52.57	1.69	62.40	122.59	461134.19	702625.37	N 32.266655	W 103.811517
	5566.00	8.19	87.73	5563.55	-30.55	-33.50	64.71	1.71	72.87	117.37	461134.30	702637.51	N 32.266655	W

Comments	MD (ft)	Incl (°)	Azim Grid (°)	TVD (ft)	VSEC (ft)	NS (ft)	EW (ft)	DLS (°/100R)	Closure (ft)	Closure Azimuth (°)	Northing (ftUS)	Easting (ftUS)	Latitude (N/S °)	Longitude (E/W °)
Last 3rd Party MWD Survey First SLB Survey Actual KOP	9254.00	4.46	84.86	9197.80	197.98	169.36	639.49	1.20	661.54	75.17	461337.15	703212.25	N 32.267205	W 103.809615
	9348.00	4.24	99.07	9291.53	198.08	169.14	646.56	1.17	668.32	75.34	461336.93	703219.32	N 32.267204	W 103.809592
	9443.00	4.11	112.50	9386.28	196.53	167.28	653.17	1.04	674.26	75.63	461335.07	703225.93	N 32.267199	W 103.809571
	9537.00	3.01	111.43	9480.10	194.58	165.09	658.58	1.17	678.96	75.93	461332.88	703231.34	N 32.267193	W 103.809554
	9632.00	2.99	102.61	9574.97	193.34	163.64	663.32	0.49	683.21	76.14	461331.43	703236.08	N 32.267189	W 103.809538
	9727.00	1.58	78.06	9669.89	193.24	163.37	667.02	1.77	686.74	76.24	461331.16	703239.78	N 32.267188	W 103.809526
	9821.00	0.40	97.63	9733.88	193.68	163.73	668.36	1.26	688.36	76.24	461331.62	703241.36	N 32.267189	W 103.809521
	9916.00	0.12	80.84	9858.87	193.81	163.85	669.02	0.30	688.79	76.24	461331.64	703241.78	N 32.267189	W 103.809520
	10010.00	0.12	58.40	9952.87	193.88	163.91	669.20	0.05	688.98	76.24	461331.70	703241.96	N 32.267189	W 103.809519
	10105.00	0.10	72.14	10047.87	193.97	163.99	669.36	0.03	689.16	76.23	461331.78	703242.12	N 32.267190	W 103.809519
Wolfcamp Intersection	10199.00	0.10	281.67	10141.87	194.01	164.03	669.36	0.21	689.17	76.23	461331.82	703242.12	N 32.267190	W 103.809519
	10294.00	0.06	117.42	10236.87	194.00	164.03	669.33	0.17	689.13	76.23	461331.82	703242.08	N 32.267190	W 103.809519
	10389.00	0.72	130.93	10331.87	193.61	163.61	669.52	0.70	689.51	76.27	461331.40	703242.58	N 32.267189	W 103.809517
	10483.00	0.70	131.03	10425.86	192.89	162.85	670.70	0.02	690.19	76.35	461330.64	703243.46	N 32.267187	W 103.809514
	10577.00	0.13	126.77	10519.86	192.47	162.41	671.22	0.61	690.59	76.40	461330.20	703243.98	N 32.267185	W 103.809513
	10672.00	0.18	46.54	10614.86	192.52	162.45	671.41	0.21	690.79	76.40	461330.24	703244.17	N 32.267185	W 103.809512
	10812.00	0.42	56.56	10754.86	192.98	162.88	672.00	0.17	691.46	76.38	461330.67	703244.76	N 32.267187	W 103.809510
	10843.00	2.94	17.96	10785.84	193.81	163.70	672.34	8.46	691.98	76.32	461331.49	703245.10	N 32.267189	W 103.809509
	10875.00	5.64	15.21	10817.75	196.14	166.00	673.01	8.46	693.18	76.14	461333.79	703245.76	N 32.267195	W 103.809507
	10969.00	18.56	17.37	10909.47	215.19	184.81	678.71	13.75	703.42	74.77	461352.60	703251.47	N 32.267247	W 103.809488
FTP / 100ft FSL Crossing	11063.00	30.66	14.36	10994.77	253.26	222.45	689.16	12.94	724.17	72.11	461390.24	703261.92	N 32.267350	W 103.809454
	11158.00	35.82	3.54	11074.27	304.85	273.74	696.89	8.26	748.73	68.55	461441.52	703269.65	N 32.267491	W 103.809428
	11252.00	41.47	349.19	11147.81	362.79	331.93	692.74	11.24	768.16	64.40	461499.71	703265.50	N 32.267651	W 103.809440
	11346.00	49.11	344.46	11213.91	426.95	396.85	677.36	8.88	785.05	59.63	461564.63	703250.12	N 32.267800	W 103.809489
	11441.00	54.67	345.43	11272.52	498.17	469.01	657.98	5.91	808.02	54.52	461636.78	703230.73	N 32.268028	W 103.809551
	11479.86	56.09	347.78	11294.60	528.91	500.12	650.57	6.18	820.59	52.45	461667.89	703223.23	N 32.268114	W 103.809514
	11535.00	58.18	350.99	11324.53	573.99	545.63	642.06	6.18	842.59	49.64	461713.40	703214.82	N 32.268239	W 103.809601
	11625.00	61.74	356.24	11369.60	650.91	623.01	633.46	6.41	888.49	45.48	461790.77	703206.22	N 32.268452	W 103.809628
	11629.00	61.90	356.46	11371.49	654.41	626.53	633.24	6.41	890.80	45.31	461794.29	703206.00	N 32.268462	W 103.809628
	11724.00	67.63	3.64	11412.01	740.15	712.35	633.44	1.11	953.25	41.64	461880.11	703206.20	N 32.268697	W 103.809616
Exit Lateral Window	11819.00	75.20	5.70	11442.27	830.07	802.02	640.80	8.23	1026.58	38.62	461969.77	703213.56	N 32.268944	W 103.809601
	11913.00	86.63	3.46	11457.09	922.67	894.39	648.17	12.38	1104.57	35.93	462062.14	703220.93	N 32.269186	W 103.809576
	12008.00	89.79	1.88	11460.06	1017.61	989.23	652.59	3.72	1185.09	33.41	462156.96	703225.35	N 32.269458	W 103.809560
	12102.00	90.70	2.42	11459.66	1111.61	1083.16	656.12	1.13	1266.38	31.21	462250.89	703228.88	N 32.269716	W 103.809547
	12221.00	90.43	2.80	11458.49	1230.60	1202.03	661.54	0.39	1372.05	28.83	462369.75	703234.30	N 32.270043	W 103.809528
	12318.00	90.75	3.21	11457.49	1327.59	1298.89	666.62	0.54	1459.97	27.17	462466.61	703239.38	N 32.270309	W 103.809510
	12412.00	89.81	1.47	11457.03	1421.59	1392.81	670.46	2.10	1545.78	25.70	462560.52	703243.22	N 32.270567	W 103.809496
	12507.00	90.46	1.43	11456.80	1516.57	1487.78	672.87	0.69	1632.86	24.34	462655.48	703245.62	N 32.270828	W 103.809486
	12602.00	90.69	359.12	11455.85	1611.48	1582.76	673.32	2.44	1720.03	23.05	462750.46	703246.08	N 32.271089	W 103.809485
	12696.00	90.43	356.98	11454.93	1705.17	1676.70	670.12	2.29	1805.65	21.79	462844.39	703242.88	N 32.271348	W 103.809492
Enter Lateral Window	12790.00	90.45	356.09	11454.21	1798.65	1770.52	664.44	0.95	1891.09	20.57	462938.21	703237.20	N 32.271605	W 103.809509
	12885.00	90.34	357.11	11453.55	1893.13	1865.35	658.81	1.08	1978.27	19.45	463033.03	703231.57	N 32.271866	W 103.809526
	12980.00	90.20	358.58	11453.11	1987.80	1960.28	655.24	1.55	2066.89	18.48	463127.96	703228.00	N 32.272127	W 103.809536
	13074.00	90.31	358.69	11452.69	2081.58	2054.25	653.00	0.17	2155.54	17.63	463221.92	703225.76	N 32.272385	W 103.809542
	13169.00	90.53	358.75	11451.99	2149.23	2149.23	652.65	0.24	2245.62	16.85	463316.89	703223.03	N 32.272647	W 103.809547
	13263.00	89.41	1.33	11452.04	2270.26	2243.22	650.94	2.99	2335.75	16.18	463410.88	703223.70	N 32.272905	W 103.809545
	13358.00	89.96	3.67	11452.56	2365.25	2338.12	655.08	2.53	2428.15	15.65	463505.77	703227.84	N 32.273166	W 103.809531
	13452.00	91.27	3.83	11451.55	2459.22	2431.91	661.23	1.40	2520.20	15.21	463599.56	703233.99	N 32.273423	W 103.809509
	13547.00	90.39	0.62	11450.18	2554.19	2526.82	664.92	3.50	2612.84	14.74	463694.46	703237.68	N 32.273684	W 103.809496
	13642.00	90.16	0.46	11449.72	2649.13	2621.81	665.81	0.29	2705.03	14.25	463789.44	703238.57	N 32.273945	W 103.809491
Exit Lateral Window	13737.00	90.47	358.39	11449.20	2743.99	2716.80	664.86	0.20	2796.97	13.26	463884.43	703239.62	N 32.274206	W 103.809489
	13831.00	89.92	358.65	11448.88	2837.75	2810.77	662.43	0.65	2887.77	13.26	463978.39	703235.19	N 32.274465	W 103.809499
	13926.00	89.55	358.29	11449.32	2932.50	2905.73	659.50	0.54	2979.72	12.79	464073.35	703232.65	N 32.274726	W 103.809506
	14019.00	91.05	358.75	11448.83	3025.26	2998.70	657.49	1.69	3069.93	12.37	464166.31	703230.25	N 32.274981	W 103.809512
	14111.00	90.21	358.81	11447.82	3117.05	3090.67	655.54	0.92	3159.42	11.98	464258.27	703228.29	N 32.275248	W 103.809517
	14205.00	91.01	358.87	11446.82	3210.85	3184.64	653.63	0.85	3251.03	11.60	464352.24	703226.39	N 32.275492	W 103.809522
	14298.00	90.48	359.48	11445.00	3303.66	3277.62	652.29	0.70	3341.89	11.26	464445.21	703225.05	N 32.275748	W 103.809525
	14392.00	90.66												

Comments	MD (ft)	Incl (°)	Azim Grid (°)	TVD (ft)	VSEC (ft)	NS (ft)	EW (ft)	DLS (°/100ft)	Closure (ft)	Closure Azimuth (°)	Northing (ftUS)	Easting (ftUS)	Latitude (N/S °)	Longitude (E/W °)
	22127.00	92.48	5.16	11405.76	11114.76	11097.63	630.32	1.34	11115.52	3.25	472264.73	703203.08	N 32.267242	W 103.809472
	22222.00	92.03	3.85	11402.02	11209.63	11192.26	637.78	1.46	11210.42	3.28	472359.36	703210.54	N 32.297502	W 103.809447
	22317.00	92.58	358.78	11398.20	11304.50	11287.13	639.96	5.36	11305.26	3.25	472454.22	703212.72	N 32.297763	W 103.809438
	22411.00	91.68	358.48	11394.70	11398.21	11381.04	637.71	1.01	11398.89	3.21	472548.12	703210.47	N 32.298021	W 103.809444
	22506.00	91.35	357.20	11392.19	11492.85	11475.94	634.13	1.39	11493.44	3.16	472643.01	703206.89	N 32.298282	W 103.809454
	22600.00	90.55	355.88	11390.63	11586.31	11569.75	628.46	1.64	11586.80	3.11	472736.82	703201.22	N 32.298540	W 103.809471
	22695.00	91.04	354.11	11389.32	11680.47	11664.37	620.17	1.93	11680.85	3.04	472831.44	703192.93	N 32.298800	W 103.809496
	22789.00	91.30	356.50	11387.40	11773.68	11758.03	612.48	2.56	11773.97	2.98	472925.09	703185.24	N 32.299058	W 103.809520
	22884.00	91.58	356.22	11385.01	11868.09	11852.81	606.45	0.42	11868.31	2.93	473019.86	703179.21	N 32.299318	W 103.809538
	22978.00	91.83	2.69	11382.21	11961.86	11946.71	605.56	6.89	11962.05	2.90	473113.76	703178.32	N 32.299576	W 103.809539
	23072.00	89.14	0.48	11381.41	12055.83	12040.66	608.16	3.70	12056.01	2.89	473207.70	703180.92	N 32.299835	W 103.809529
	23167.00	90.78	0.47	11381.48	12150.76	12135.65	608.94	1.73	12150.92	2.87	473302.69	703181.71	N 32.300096	W 103.809525
	23261.00	90.80	2.02	11380.18	12244.73	12229.62	610.99	1.65	12244.87	2.86	473396.85	703183.75	N 32.300354	W 103.809517
	23355.00	90.89	7.57	11378.80	12338.61	12323.24	618.84	5.90	12338.77	2.87	473490.27	703191.60	N 32.300611	W 103.809490
	23450.00	91.03	1.09	11377.20	12433.50	12417.91	626.01	6.82	12433.68	2.89	473584.92	703198.77	N 32.300871	W 103.809465
	23544.00	90.69	357.06	11375.79	12527.30	12511.87	624.49	4.30	12527.44	2.86	473678.88	703197.25	N 32.301130	W 103.809469
	23733.00	90.26	354.42	11374.22	12714.93	12700.32	610.45	1.42	12714.98	2.75	473867.32	703183.21	N 32.301648	W 103.809511
	23828.00	90.61	352.83	11373.50	12808.76	12794.73	599.90	1.71	12808.78	2.68	473961.72	703172.67	N 32.301907	W 103.809544
	23922.00	89.50	350.17	11373.41	12901.00	12887.68	586.01	3.07	12901.00	2.60	474054.67	703158.78	N 32.302163	W 103.809587
Exit Lateral Window	24012.86	88.52	352.22	11374.98	12990.05	12977.45	572.10	2.50	12990.05	2.52	474144.43	703144.87	N 32.302410	W 103.809631
	24017.00	88.48	352.31	11375.09	12994.12	12981.55	571.55	2.50	12994.13	2.52	474148.54	703144.31	N 32.302421	W 103.809633
	24111.00	90.13	359.57	11376.23	13087.42	13075.25	564.90	7.92	13087.44	2.47	474242.22	703137.66	N 32.302679	W 103.809653
	24301.00	90.73	2.55	11374.80	13277.33	13265.19	568.41	1.60	13277.36	2.45	474432.15	703141.18	N 32.303201	W 103.809638
Enter Lateral Window	24343.51	90.93	2.52	11374.19	13319.83	13307.65	570.29	0.47	13319.86	2.45	474474.61	703143.06	N 32.303318	W 103.809632
	24490.00	91.60	2.41	11370.96	13466.28	13453.97	576.59	0.47	13466.32	2.45	474620.92	703149.35	N 32.303720	W 103.809609
LTP / 100ft FNL Crossing	24663.00	92.59	0.44	11364.63	13639.12	13626.79	580.89	1.27	13639.16	2.44	474793.73	703153.66	N 32.304195	W 103.809592
Final MWD Survey	24680.00	92.69	0.25	11363.85	13656.09	13643.77	581.00	1.27	13656.13	2.44	474810.71	703153.76	N 32.304241	W 103.809592
Prod to TD	24717.00	92.69	0.25	11362.11	13693.02	13680.73	581.16	0.00	13693.07	2.43	474847.66	703153.92	N 32.304343	W 103.809591

Survey Type: Def Survey

Survey Error Model: ISCWSA Rev 3 *** 3-D 95.000% Confidence 2.7955 sigma
Survey Program:

Description	Part	MD From (ft)	MD To (ft)	EOU Freq (ft)	Hole Size (in)	Casing Diameter (in)	Survey Tool Type	Borehole / Survey
	1	0.000	24.000	1/98.425	26.400	26.400	GYD_GC+DROP+CAS-Depth Only	Precious 30-18 Federal Com 176H / Oxy Precious 30-18 Federal Com 176H Gyro+MWD to 24717MD
	1	24.000	24.000	Act Stns	26.400	26.400	GYD_GC+DROP+CAS-Depth Only	Precious 30-18 Federal Com 176H / Oxy Precious 30-18 Federal Com 176H Gyro+MWD to 24717MD
	1	24.000	376.000	Act Stns	26.400	26.400	GYD_GC+DROP+CAS	Precious 30-18 Federal Com 176H / Oxy Precious 30-18 Federal Com 176H Gyro+MWD to 24717MD
	1	376.000	20706.000	Act Stns	26.400	26.400	A010Mb_MWD+IFR1+SAG+MS	Precious 30-18 Federal Com 176H / Oxy Precious 30-18 Federal Com 176H Gyro+MWD to 24717MD
	1	20706.000	21655.000	Act Stns	26.400	26.400	A009Mb_MWD+IFR1+SAG	Precious 30-18 Federal Com 176H / Oxy Precious 30-18 Federal Com 176H Gyro+MWD to 24717MD
	1	21655.000	24717.000	Act Stns	26.400	26.400	A010Mb_MWD+IFR1+SAG+MS	Precious 30-18 Federal Com 176H / Oxy Precious 30-18 Federal Com 176H Gyro+MWD to 24717MD

Intent ☐ As Drilled ☐

API #		
Operator Name:	Property Name:	Well Number

Kick Off Point (KOP)

UL	Section	Township	Range	Lot	Feet	From N/S	Feet	From E/W	County
Latitude					Longitude				NAD

First Take Point (FTP)

UL	Section	Township	Range	Lot	Feet	From N/S	Feet	From E/W	County
Latitude					Longitude				NAD

Last Take Point (LTP)

UL	Section	Township	Range	Lot	Feet	From N/S	Feet	From E/W	County
Latitude					Longitude				NAD

Is this well the defining well for the Horizontal Spacing Unit? ☐Is this well an infill well? ☐

If infill is yes please provide API if available, Operator Name and well number for Defining well for Horizontal Spacing Unit.

API #		
Operator Name:	Property Name:	Well Number

KZ 06/29/2018

Well Name: PRECIOUS 30-18 FEDERAL COM	Well Location: T23S / R31E / SEC 31 / NENE / 32.266748 / -103.811687	County or Parish/State: EDDY / NM
Well Number: 176H	Type of Well: OIL WELL	Allottee or Tribe Name:
Lease Number: NMNM21640	Unit or CA Name:	Unit or CA Number:
US Well Number: 3001546462	Well Status: Producing Oil Well	Operator: OXY USA INCORPORATED

Subsequent Report

Sundry ID: 2731323

Type of Submission: Subsequent Report

Type of Action: Workover Operations

Date Sundry Submitted: 05/16/2023

Time Sundry Submitted: 03:57

Date Operation Actually Began: 02/17/2023

Actual Procedure: RUPU 02/17/23, RIH & clean out to PBTD @ 24672', pressure test casing to 11300# for 30 min, good test. RIH & perf @ 11663-24436' Total 1560 holes. Frac in 52 stages w/ 390355BBL Produced Water w/ 25955398# sand, RD Liberty Oilfield Services 03/01/23. Well ready to produce 03/06/23. OXY USA Inc. requests a tubing exception while continuing to flow back this well. The estimated date of tubing install is 06/25/2023.

Well Name: PRECIOUS 30-18 FEDERAL COM	Well Location: T23S / R31E / SEC 31 / NENE / 32.266748 / -103.811687	County or Parish/State: EDDY / NM
Well Number: 176H	Type of Well: OIL WELL	Allottee or Tribe Name:
Lease Number: NMNM21640	Unit or CA Name:	Unit or CA Number:
US Well Number: 3001546462	Well Status: Producing Oil Well	Operator: OXY USA INCORPORATED

Operator

I certify that the foregoing is true and correct. Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction. Electronic submission of Sundry Notices through this system satisfies regulations requiring a


Operator Electronic Signature: JANA MENDIOLA
Signed on: MAY 16, 2023 03:57 PM
Name: OXY USA INCORPORATED
Title: Regulatory Coordinator
Street Address: PO BOX 50250
City: Midland **State:** TX
Phone: (432) 685-5936
Email address: Janalyn_mendiola@oxy.com

Field

Representative Name:
Street Address:
City: **State:** **Zip:**
Phone:
Email address:

BLM Point of Contact

BLM POC Name: JONATHON W SHEPARD
BLM POC Phone: 5752345972
Disposition: Accepted
Signature: Jonathon Shepard
BLM POC Title: Petroleum Engineer
BLM POC Email Address: jshepard@blm.gov
Disposition Date: 05/30/2023

Submit To Appropriate District Office Two Copies <u>District I</u> 1625 N. French Dr., Hobbs, NM 88240 <u>District II</u> 811 S. First St., Artesia, NM 88210 <u>District III</u> 1000 Rio Brazos Rd., Aztec, NM 87410 <u>District IV</u> 1220 S. St. Francis Dr., Santa Fe, NM 87505		State of New Mexico Energy, Minerals and Natural Resources Oil Conservation Division 1220 South St. Francis Dr. Santa Fe, NM 87505			Form C-105 Revised April 3, 2017					
WELL COMPLETION OR RECOMPLETION REPORT AND LOG								1. WELL API NO. 30-015-46462		
4. Reason for filing: ☒ COMPLETION REPORT (Fill in boxes #1 through #31 for State and Fee wells only) ☐ C-144 CLOSURE ATTACHMENT (Fill in boxes #1 through #9, #15 Date Rig Released and #32 and/or #33; attach this and the plat to the C-144 closure report in accordance with 19.15.17.13.K NMAC)								2. Type of Lease ☐ STATE ☐ FEE ☒ FED/INDIAN		
								3. State Oil & Gas Lease No.		
7. Type of Completion: ☒ NEW WELL ☐ WORKOVER ☐ DEEPENING ☐ PLUGBACK ☐ DIFFERENT RESERVOIR ☐ OTHER								5. Lease Name or Unit Agreement Name PRECIOUS 30-18 FEDERAL COM		
8. Name of Operator: OXY USA INC.								6. Well Number: 176H		
10. Address of Operator: P.O. BOX 50250 MIDLAND, TX 79710								9. OGRID: 16696		
11. Pool name or Wildcat WC-015 G-08 S233135D; WOLFCAMP										
12. Location	Unit Ltr	Section	Township	Range	Lot	Feet from the	N/S Line	Feet from the	E/W Line	County
Surface:	A	31	23S	31E		520	NORTH	1030	EAST	EDDY
BH:	I	18	23S	31E		2599	SOUTH	372	EAST	EDDY
13. Date Spudded 10/23/2022	14. Date T.D. Reached 01/23/2023	15. Date Rig Released 01/26/2023			16. Date Completed (Ready to Produce) 03/06/2023			17. Elevations (DF and RKB, RT, GR, etc.) 3347' GL		
18. Total Measured Depth of Well 24717'M 11362'V			19. Plug Back Measured Depth 24672'M 11364'V			20. Was Directional Survey Made? YES		21. Type Electric and Other Logs Run CBL		
22. Producing Interval(s), of this completion - Top, Bottom, Name 11663-24436' WOLFCAMP										
23. CASING RECORD (Report all strings set in well)										
CASING SIZE		WEIGHT LB./FT.		DEPTH SET		HOLE SIZE		CEMENTING RECORD		AMOUNT PULLED
13.375" J55		54.5		427'		17.5"		505sx-surf circ		
9.625" HCL80		40		4184'		12.25"		1272sx-surf circ		
7.625" HCL80		26.4		10780'		8.75"		355sx-TOC@6542'		
5.5" P110 ICY		20		24697'		6.75"		1065sx-TOC@6067'		
24. LINER RECORD										
SIZE	TOP	BOTTOM	SACKS CEMENT	SCREEN		25. TUBING RECORD		SIZE		DEPTH SET
26. Perforation record (interval, size, and number) Perf @ 11663-24436' Total 1560 holes, Hole Size=0.42					27. ACID, SHOT, FRACTURE, CEMENT, SQUEEZE, ETC.					
					DEPTH INTERVAL		AMOUNT AND KIND MATERIAL USED			
					11663-24436'		390355BBL Produced Water w/ 25955398# sand			
28. PRODUCTION										
Date First Production 03/09/2023		Production Method (<i>Flowing, gas lift, pumping - Size and type pump</i>) Flowing				Well Status (<i>Prod. or Shut-in</i>) Prod.				
Date of Test 04/01/2023	Hours Tested 24 hrs.	Choke Size 60/128	Prod'n For Test Period	Oil - Bbl 3695	Gas - MCF 7335	Water - Bbl. 5284	Gas - Oil Ratio 1985			
Flow Tubing Press.	Casing Pressure 1439	Calculated 24- Hour Rate	Oil - Bbl. 3695	Gas - MCF 7335	Water - Bbl. 5284	Oil Gravity - API - (<i>Corr.</i>)				
29. Disposition of Gas (<i>Sold, used for fuel, vented, etc.</i>) SOLD								30. Test Witnessed By		
31. List Attachments WBD										
32. If a temporary pit was used at the well, attach a plat with the location of the temporary pit.								33. Rig Release Date:		
34. If an on-site burial was used at the well, report the exact location of the on-site burial:										
Latitude _____ Longitude _____ NAD83										
I hereby certify that the information shown on both sides of this form is true and complete to the best of my knowledge and belief Printed										
Signature: 		Name: <u>Jana Mendiola</u>			Title: <u>Sr. Regulatory Analyst</u>			Date: <u>06/04/2023</u>		
E-mail Address: <u>janalyn_mendiola@oxy.com</u>										

This form is to be filed with the appropriate District Office of the Division not later than 20 days after the completion of any newly-drilled or deepened well and not later than 60 days after completion of closure. When submitted as a completion report, this shall be accompanied by one copy of all electrical and radio-activity logs run on the well and a summary of all special tests conducted, including drill stem tests. All depths reported shall be measured depths. In the case of directionally drilled wells, true vertical depths shall also be reported. For multiple completions, items 11, 12 and 26-31 shall be reported for each zone.

Southeastern New Mexico		Northwestern New Mexico	
T. Rustler 371'	T. Bell Canyon 4125'	T. Ojo Alamo	T. Penn A"
T. Salado 701'	T. Strawn	T. Kirtland	T. Penn. "B"
T. Castile 1966'	T. Atoka	T. Fruitland	T. Penn. "C"
T. Delaware 4006'	T. Miss	T. Pictured Cliffs	T. Penn. "D"
T. Cherry Canyon 5037'	T. Devonian	T. Cliff House	T. Leadville
T. Brushy Canyon 6267'	T. Silurian	T. Menefee	T. Madison
T. Grayburg	T. Montoya	T. Point Lookout	T. Elbert
T. San Andres	T. Simpson	T. Mancos	T. McCracken
T. Glorieta	T. McKee	T. Gallup	T. Ignacio Otzte
T. Paddock	T. Ellenburger	Base Greenhorn	T. Granite
T. Blinebry	T. Gr. Wash	T. Dakota	
T. Tubb	T. Delaware Sand	T. Morrison	
T. Drinkard	T. Bone Spring 7972'	T. Todilto	
T. Abo	T. 1 st Bone Spring 9074'	T. Entrada	
T. Wolfcamp 11637'	T. 2 nd Bone Spring 9737'	T. Wingate	
T. Penn	T. 3 rd Bone Spring 10933'	T. Chinle	
T. Cisco (Bough C)	T.	T. Permian	

No. 1, from.....to.....

No. 2, from.....to.....

No. 3, from.....to.....

No. 4, from.....to.....


Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from.....to.....feet.....
 No. 2, from.....to.....feet.....
 No. 3, from.....to.....feet.....

From	To	Thickness In Feet	Lithology

From	To	Thickness In Feet	Lithology

OXY USA Inc.
Precious 30-18 Federal Com 176H
API No. 30-015-46462

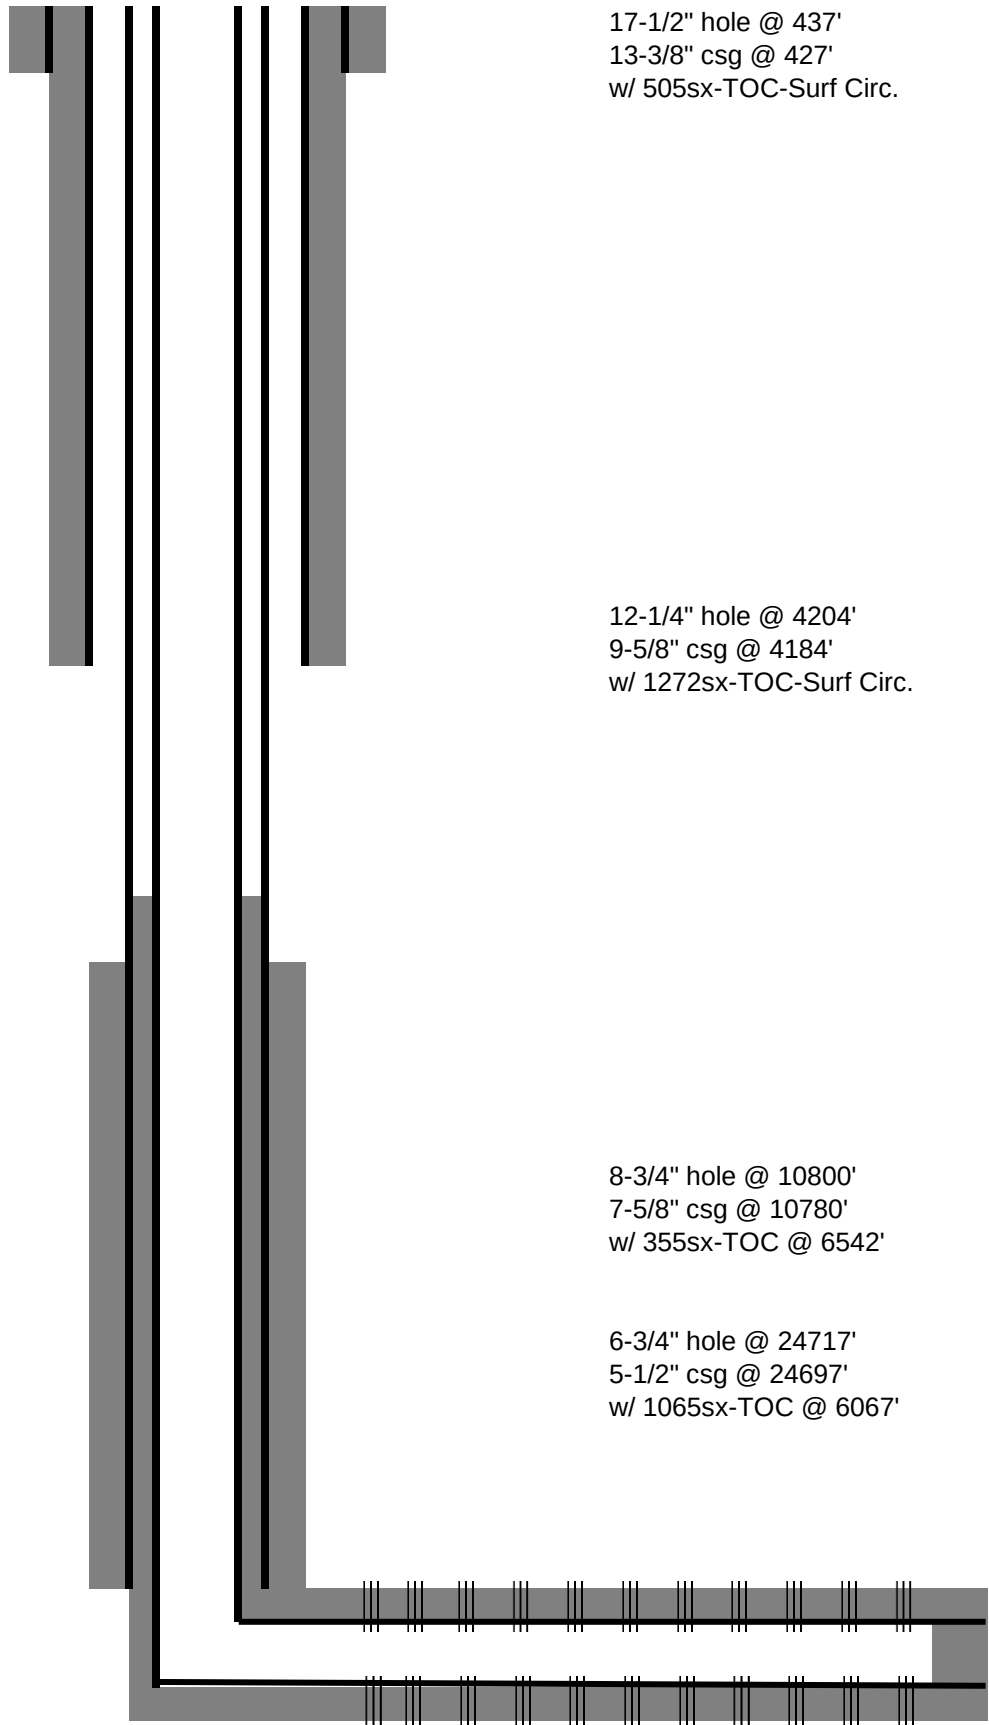

Perfs @ 11663-24436'

TD- 24717'M 11362'V

District I
1625 N. French Dr., Hobbs, NM 88240
Phone:(575) 393-6161 Fax:(575) 393-0720
District II
811 S. First St., Artesia, NM 88210
Phone:(575) 748-1283 Fax:(575) 748-9720
District III
1000 Rio Brazos Rd., Aztec, NM 87410
Phone:(505) 334-6178 Fax:(505) 334-6170
District IV
1220 S. St Francis Dr., Santa Fe, NM 87505
Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

ACKNOWLEDGMENTS

Action 223561

ACKNOWLEDGMENTS

Operator: OXY USA INC P.O. Box 4294 Houston, TX 772104294	OGRID: 16696
	Action Number: 223561
	Action Type: [C-104] Completion Packet (C-104C)

ACKNOWLEDGMENTS

☒	I hereby certify that the required Water Use Report has been, or will be, submitted for this wells completion.
☒	I hereby certify that the required FracFocus disclosure has been, or will be, submitted for this wells completion.

District I
1625 N. French Dr., Hobbs, NM 88240
Phone:(575) 393-6161 Fax:(575) 393-0720
District II
811 S. First St., Artesia, NM 88210
Phone:(575) 748-1283 Fax:(575) 748-9720
District III
1000 Rio Brazos Rd., Aztec, NM 87410
Phone:(505) 334-6178 Fax:(505) 334-6170
District IV
1220 S. St Francis Dr., Santa Fe, NM 87505
Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

CONDITIONS

Action 223561

CONDITIONS

Operator: OXY USA INC P.O. Box 4294 Houston, TX 772104294	OGRID: 16696
	Action Number: 223561
	Action Type: [C-104] Completion Packet (C-104C)

CONDITIONS

Created By	Condition	Condition Date
plmartinez	File 3160-4 Completion Report within 10 days to NMOCD after BLM approval.	6/8/2023
plmartinez	Submit CBL Well Log (s) in OCD Permitting as [UF-WL] EP Well Log Submission.	6/8/2023