Office District I – (575) 393-6161 Energy, Minerals and Natural Resources	Revised August 1, 2011
1625 N. French Dr., Hobbs, NM 88240	WELL API NO. 30-025-34626
<u>District II</u> – (575) 748-1283 811 S. First St., Artesia, NM 88210 OIL CONSERVATION DIVISION	5. Indicate Type of Lease
<u>District III</u> – (505) 334-6178 1220 South St. Francis Dr.	STATE X FEE
1000 Rio Brazos Rd., Aztec, NM 87410 District IV = (505) 476-3460 Santa Fe, NM 87505	6. State Oil & Gas Lease No.
District IV - (505) 476-3460 1220 S. St. Francis Dr., Santa Fe, NM 87505	v. Saite Off & Gas Boase 110.
SUNDRY NOTICES AND REPORTS ON WELLS	7. Lease Name or Unit Agreement Name
(DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)	RED HILLS UNIT
1. Type of Well: Oil Well Gas Well X Other	8. Well Number 004
2. Name of Operator CIMAREX ENERGY CO. OF COLORADO	9. OGRID Number 162683
3. Address of Operator	10. Pool name or Wildcat
6001 DEAUVILLE BLVD., SUITE 300N, MIDLAND, TEXAS 79706	RED HILLS; WOLFCAMP (GAS)
4. Well Location	A. WEST Line
	rom the WEST line
544444	3E NMPM LEA County
11. Elevation (Show whether DR, RKB, RT, GR, etc.) 3,387' - GR	
3,307 GR	
12. Check Appropriate Box to Indicate Nature of Notice,	Report or Other Data
NOTICE OF INTENTION TO: SUB	SEQUENT REPORT OF:
PERFORM REMEDIAL WORK PLUG AND ABANDON X REMEDIAL WORK	
TEMPORARILY ABANDON	
PULL OR ALTER CASING MULTIPLE COMPL CASING/CEMENT	
DOWNHOLE COMMINGLE	
OTHER: OTHER:	Laive meetingert dates, including estimated date
13. Describe proposed or completed operations. (Clearly state all pertinent details, and of starting any proposed work). SEE RULE 19.15.7.14 NMAC. For Multiple Cor	npletions: Attach wellhore diagram of
proposed completion or recompletion.	ipictions. Ittuen wonoore diagram or
1) SET 7" CIBP @ 13,650'; DUMP BAIL 35' CLASS "H" CMT. @ 13,650'-13	,615'; CIRC. WELL W/ M.L.F.
2) PUMP (65) SXS. CLASS "H" CMT. @ 12,650'-12,450' (7" LNR.TOP); WO	
The state of the s	C X TAG TOC.
3) PUMP (80) SXS. CLASS "H" CMT. @ 12,203'-12,003' (T/WLCP.).	C X TAG TOC.
 3) PUMP (80) SXS. CLASS "H" CMT. @ 12,203'-12,003' (T/WLCP.). 4) PUMP (75) SXS. CLASS 'H' CMT. @ 8,969'-8,789' (T/BNSG.) 	C X TAG TOC.
 3) PUMP (80) SXS. CLASS "H" CMT. @ 12,203'-12,003' (T/WLCP.). 4) PUMP (75) SXS. CLASS "H" CMT. @ 8,969'-8,789' (T/BNSG.) 5) PERF. X ATTEMPT TO SOZ. (100) SXS. CLASS "C" CMT. @ 4,950'-4,81 	C X TAG TOC. 0' (13-3/8" CSG.SHOE, T/DLWR.); TAG.
 PUMP (80) SXS. CLASS "H" CMT. @ 12,203'-12,003' (T/WLCP.). PUMP (75) SXS. CLASS "H" CMT. @ 8,969'-8,789' (T/BNSG.) PERF. X ATTEMPT TO SQZ. (100) SXS. CLASS "C" CMT. @ 4,950'-4,81 PERF. X ATTEMPT TO SQZ. (75) SXS. CLASS "C" CMT. @ 1,190'-1,080 	C X TAG TOC. O' (13-3/8" CSG.SHOE, T/DLWR.); TAG. O' (T/SALT); WOC X TAG TOC.
 PUMP (80) SXS. CLASS "H" CMT. @ 12,203'-12,003' (T/WLCP.). PUMP (75) SXS. CLASS "H" CMT. @ 8,969'-8,789' (T/BNSG.) PERF. X ATTEMPT TO SQZ. (100) SXS. CLASS "C" CMT. @ 4,950'-4,81 PERF. X ATTEMPT TO SQZ. (75) SXS. CLASS "C" CMT. @ 1,190'-1,080 PERF. X ATTEMPT TO SQZ. (90) SXS. CLASS "C" CMT. @ 985'-842' (T 	C X TAG TOC. O' (13-3/8" CSG.SHOE, T/DLWR.); TAG. O' (T/SALT); WOC X TAG TOC. O' (ANHY,20" CSG.SHOE); WOC X TAG TOC.
 PUMP (80) SXS. CLASS "H" CMT. @ 12,203'-12,003' (T/WLCP.). PUMP (75) SXS. CLASS "H" CMT. @ 8,969'-8,789' (T/BNSG.) PERF. X ATTEMPT TO SQZ. (100) SXS. CLASS "C" CMT. @ 4,950'-4,81 PERF. X ATTEMPT TO SQZ. (75) SXS. CLASS "C" CMT. @ 1,190'-1,080 PERF. X ATTEMPT TO SQZ. (90) SXS. CLASS "C" CMT. @ 985'-842' (T PERF. X CIRC. TO SURF., FILLING ALL ANNULI, (40) SXS. CLASS "C" 	C X TAG TOC. O' (13-3/8" CSG.SHOE, T/DLWR.); TAG. O' (T/SALT); WOC X TAG TOC. O' (ANHY,20" CSG.SHOE); WOC X TAG TOC. O' CMT. @ 63'-3'
 PUMP (80) SXS. CLASS "H" CMT. @ 12,203'-12,003' (T/WLCP.). PUMP (75) SXS. CLASS 'H" CMT. @ 8,969'-8,789' (T/BNSG.) PERF. X ATTEMPT TO SQZ. (100) SXS. CLASS "C" CMT. @ 4,950'-4,81 PERF. X ATTEMPT TO SQZ. (75) SXS. CLASS "C" CMT. @ 1,190'-1,080 PERF. X ATTEMPT TO SQZ. (90) SXS. CLASS "C" CMT. @ 985'-842' (T PERF. X CIRC. TO SURF., FILLING ALL ANNULI, (40) SXS. CLASS "C" 	C X TAG TOC. O' (13-3/8" CSG.SHOE, T/DLWR.); TAG. O' (T/SALT); WOC X TAG TOC. O' (ANHY,20" CSG.SHOE); WOC X TAG TOC. O' CMT. @ 63'-3'
 PUMP (80) SXS. CLASS "H" CMT. @ 12,203'-12,003' (T/WLCP.). PUMP (75) SXS. CLASS 'H" CMT. @ 8,969'-8,789' (T/BNSG.) PERF. X ATTEMPT TO SQZ. (100) SXS. CLASS "C" CMT. @ 4,950'-4,81 PERF. X ATTEMPT TO SQZ. (75) SXS. CLASS "C" CMT. @ 1,190'-1,080 PERF. X ATTEMPT TO SQZ. (90) SXS. CLASS "C" CMT. @ 985'-842' (T PERF. X CIRC. TO SURF., FILLING ALL ANNULI, (40) SXS. CLASS "C" DIG OUT X CUT OFF WELLHEAD 3'B.G.L.; WELD ON STEEL PLATE MARKER. 	C X TAG TOC. O' (13-3/8" CSG.SHOE, T/DLWR.); TAG. O' (T/SALT); WOC X TAG TOC. O'ANHY,20" CSG.SHOE); WOC X TAG TOC. O' CMT. @ 63'-3' O' CSGS.X INSTALL DRY HOLE
 PUMP (80) SXS. CLASS "H" CMT. @ 12,203'-12,003' (T/WLCP.). PUMP (75) SXS. CLASS 'H" CMT. @ 8,969'-8,789' (T/BNSG.) PERF. X ATTEMPT TO SQZ. (100) SXS. CLASS "C" CMT. @ 4,950'-4,81 PERF. X ATTEMPT TO SQZ. (75) SXS. CLASS "C" CMT. @ 1,190'-1,080 PERF. X ATTEMPT TO SQZ. (90) SXS. CLASS "C" CMT. @ 985'-842' (T PERF. X CIRC. TO SURF., FILLING ALL ANNULI, (40) SXS. CLASS "C" DIG OUT X CUT OFF WELLHEAD 3'B.G.L.; WELD ON STEEL PLATE MARKER. DURING THIS PROCEDURE WE PLAN TO USE THE CLOSED-LOOP SYST 	C X TAG TOC. O' (13-3/8" CSG.SHOE, T/DLWR.); TAG. O' (T/SALT); WOC X TAG TOC. O'ANHY,20" CSG.SHOE); WOC X TAG TOC. O' CMT. @ 63'-3' O' CSGS.X INSTALL DRY HOLE
 3) PUMP (80) SXS. CLASS "H" CMT. @ 12,203'-12,003' (T/WLCP.). 4) PUMP (75) SXS. CLASS 'H" CMT. @ 8,969'-8,789' (T/BNSG.) 5) PERF. X ATTEMPT TO SQZ. (100) SXS. CLASS "C" CMT. @ 4,950'-4,81 6) PERF. X ATTEMPT TO SQZ. (75) SXS. CLASS "C" CMT. @ 1,190'-1,080 7) PERF. X ATTEMPT TO SQZ. (90) SXS. CLASS "C" CMT. @ 985'-842' (T 8) PERF. X CIRC. TO SURF., FILLING ALL ANNULI, (40) SXS. CLASS "C" 9) DIG OUT X CUT OFF WELLHEAD 3'B.G.L.; WELD ON STEEL PLATE MARKER. DURING THIS PROCEDURE WE PLAN TO USE THE CLOSED-LOOP SYST CONTENTS TO THE REQURED DISPOSAL, PER OCD RULE 19.15.15. 	C X TAG TOC. O' (13-3/8" CSG.SHOE, T/DLWR.); TAG. O' (T/SALT); WOC X TAG TOC. O'ANHY,20" CSG.SHOE); WOC X TAG TOC. O' CMT. @ 63'-3' O' CSGS.X INSTALL DRY HOLE
 3) PUMP (80) SXS. CLASS "H" CMT. @ 12,203'-12,003' (T/WLCP.). 4) PUMP (75) SXS. CLASS 'H" CMT. @ 8,969'-8,789' (T/BNSG.) 5) PERF. X ATTEMPT TO SQZ. (100) SXS. CLASS "C" CMT. @ 4,950'-4,81 6) PERF. X ATTEMPT TO SQZ. (75) SXS. CLASS "C" CMT. @ 1,190'-1,080 7) PERF. X ATTEMPT TO SQZ. (90) SXS. CLASS "C" CMT. @ 985'-842' (T 8) PERF. X CIRC. TO SURF., FILLING ALL ANNULI, (40) SXS. CLASS "C" 9) DIG OUT X CUT OFF WELLHEAD 3'B.G.L.; WELD ON STEEL PLATE MARKER. DURING THIS PROCEDURE WE PLAN TO USE THE CLOSED-LOOP SYST CONTENTS TO THE REQURED DISPOSAL, PER OCD RULE 19.15.15. 	C X TAG TOC. O' (13-3/8" CSG.SHOE, T/DLWR.); TAG. O' (T/SALT); WOC X TAG TOC. O'ANHY,20" CSG.SHOE); WOC X TAG TOC. O' CMT. @ 63'-3' O' CSGS.X INSTALL DRY HOLE
 3) PUMP (80) SXS. CLASS "H" CMT. @ 12,203'-12,003' (T/WLCP.). 4) PUMP (75) SXS. CLASS 'H" CMT. @ 8,969'-8,789' (T/BNSG.) 5) PERF. X ATTEMPT TO SQZ. (100) SXS. CLASS "C" CMT. @ 4,950'-4,81 6) PERF. X ATTEMPT TO SQZ. (75) SXS. CLASS "C" CMT. @ 1,190'-1,080 7) PERF. X ATTEMPT TO SQZ. (90) SXS. CLASS "C" CMT. @ 985'-842' (T 8) PERF. X CIRC. TO SURF., FILLING ALL ANNULI, (40) SXS. CLASS "C" 9) DIG OUT X CUT OFF WELLHEAD 3'B.G.L.; WELD ON STEEL PLATE MARKER. DURING THIS PROCEDURE WE PLAN TO USE THE CLOSED-LOOP SYST CONTENTS TO THE REQURED DISPOSAL, PER OCD RULE 19.15.15. 	C X TAG TOC. O' (13-3/8" CSG.SHOE, T/DLWR.); TAG. O' (T/SALT); WOC X TAG TOC. O'ANHY,20" CSG.SHOE); WOC X TAG TOC. O' CMT. @ 63'-3' O' CSGS.X INSTALL DRY HOLE
3) PUMP (80) SXS. CLASS "H" CMT. @ 12,203'-12,003' (T/WLCP.). 4) PUMP (75) SXS. CLASS 'H" CMT. @ 8,969'-8,789' (T/BNSG.) 5) PERF. X ATTEMPT TO SQZ. (100) SXS. CLASS "C" CMT. @ 4,950'-4,81 6) PERF. X ATTEMPT TO SQZ. (75) SXS. CLASS "C" CMT. @ 1,190'-1,080 7) PERF. X ATTEMPT TO SQZ. (90) SXS. CLASS "C" CMT. @ 985'-842' (T 8) PERF. X CIRC. TO SURF., FILLING ALL ANNULI, (40) SXS. CLASS "C" 9) DIG OUT X CUT OFF WELLHEAD 3'B.G.L.; WELD ON STEEL PLATE MARKER. DURING THIS PROCEDURE WE PLAN TO USE THE CLOSED-LOOP SYST CONTENTS TO THE REQURED DISPOSAL, PER OCD RULE 19.15.15.	C X TAG TOC. O' (13-3/8" CSG.SHOE, T/DLWR.); TAG. O' (T/SALT); WOC X TAG TOC. O'ANHY,20" CSG.SHOE); WOC X TAG TOC. O' CMT. @ 63'-3' O' CSGS.X INSTALL DRY HOLE EM W/ A STEEL TANK AND HAUL
 3) PUMP (80) SXS. CLASS "H" CMT. @ 12,203'-12,003' (T/WLCP.). 4) PUMP (75) SXS. CLASS 'H" CMT. @ 8,969'-8,789' (T/BNSG.) 5) PERF. X ATTEMPT TO SQZ. (100) SXS. CLASS "C" CMT. @ 4,950'-4,81 6) PERF. X ATTEMPT TO SQZ. (75) SXS. CLASS "C" CMT. @ 1,190'-1,080 7) PERF. X ATTEMPT TO SQZ. (90) SXS. CLASS "C" CMT. @ 985'-842' (T 8) PERF. X CIRC. TO SURF., FILLING ALL ANNULI, (40) SXS. CLASS "C" 9) DIG OUT X CUT OFF WELLHEAD 3'B.G.L.; WELD ON STEEL PLATE MARKER. DURING THIS PROCEDURE WE PLAN TO USE THE CLOSED-LOOP SYST CONTENTS TO THE REQURED DISPOSAL, PER OCD RULE 19.15.15. 	C X TAG TOC. O' (13-3/8" CSG.SHOE, T/DLWR.); TAG. O' (T/SALT); WOC X TAG TOC. O'ANHY,20" CSG.SHOE); WOC X TAG TOC. O' CMT. @ 63'-3' O' CSGS.X INSTALL DRY HOLE EM W/ A STEEL TANK AND HAUL
3) PUMP (80) SXS. CLASS "H" CMT. @ 12,203'-12,003' (T/WLCP.). 4) PUMP (75) SXS. CLASS 'H" CMT. @ 8,969'-8,789' (T/BNSG.) 5) PERF. X ATTEMPT TO SQZ. (100) SXS. CLASS "C" CMT. @ 4,950'-4,81 6) PERF. X ATTEMPT TO SQZ. (75) SXS. CLASS "C" CMT. @ 1,190'-1,080 7) PERF. X ATTEMPT TO SQZ. (90) SXS. CLASS "C" CMT. @ 985'-842' (T 8) PERF. X CIRC. TO SURF., FILLING ALL ANNULI, (40) SXS. CLASS "C" 9) DIG OUT X CUT OFF WELLHEAD 3'B.G.L.; WELD ON STEEL PLATE MARKER. DURING THIS PROCEDURE WE PLAN TO USE THE CLOSED-LOOP SYST CONTENTS TO THE REQURED DISPOSAL, PER OCD RULE 19.15.15.	C X TAG TOC. O' (13-3/8" CSG.SHOE, T/DLWR.); TAG. O' (T/SALT); WOC X TAG TOC. O'ANHY,20" CSG.SHOE); WOC X TAG TOC. O' CMT. @ 63'-3' O' CSGS.X INSTALL DRY HOLE EM W/ A STEEL TANK AND HAUL
3) PUMP (80) SXS. CLASS "H" CMT. @ 12,203'-12,003' (T/WLCP.). 4) PUMP (75) SXS. CLASS "H" CMT. @ 8,969'-8,789' (T/BNSG.) 5) PERF. X ATTEMPT TO SQZ. (100) SXS. CLASS "C" CMT. @ 4,950'-4,81 6) PERF. X ATTEMPT TO SQZ. (75) SXS. CLASS "C" CMT. @ 1,190'-1,080 7) PERF. X ATTEMPT TO SQZ. (90) SXS. CLASS "C" CMT. @ 985'-842' (T 8) PERF. X CIRC. TO SURF., FILLING ALL ANNULI, (40) SXS. CLASS "C" 9) DIG OUT X CUT OFF WELLHEAD 3'B.G.L.; WELD ON STEEL PLATE "MARKER. DURING THIS PROCEDURE WE PLAN TO USE THE CLOSED-LOOP SYST CONTENTS TO THE REQURED DISPOSAL, PER OCD RULE 19.15.15. Adhere to NMOCD COAs attached. I hereby certify that the information above is true and complete to the best of my knowledg SIGNATURE Type or print name: DAVID A. EYLER E-mail address: DEYLER@MILAGRO-	C X TAG TOC. O' (13-3/8" CSG.SHOE, T/DLWR.); TAG. O' (T/SALT); WOC X TAG TOC. O'ANHY,20" CSG.SHOE); WOC X TAG TOC. O'CMT. @ 63'-3' TO CSGS.X INSTALL DRY HOLE EM W/ A STEEL TANK AND HAUL e and belief. DATE: 07/27/2023
3) PUMP (80) SXS. CLASS "H" CMT. @ 12,203'-12,003' (T/WLCP.). 4) PUMP (75) SXS. CLASS "H" CMT. @ 8,969'-8,789' (T/BNSG.) 5) PERF. X ATTEMPT TO SQZ. (100) SXS. CLASS "C" CMT. @ 4,950'-4,81 6) PERF. X ATTEMPT TO SQZ. (75) SXS. CLASS "C" CMT. @ 1,190'-1,080 7) PERF. X ATTEMPT TO SQZ. (90) SXS. CLASS "C" CMT. @ 985'-842' (T 8) PERF. X CIRC. TO SURF., FILLING ALL ANNULI, (40) SXS. CLASS "C" 9) DIG OUT X CUT OFF WELLHEAD 3'B.G.L.; WELD ON STEEL PLATE MARKER. DURING THIS PROCEDURE WE PLAN TO USE THE CLOSED-LOOP SYST CONTENTS TO THE REQURED DISPOSAL, PER OCD RULE 19.15.15. Adhere to NMOCD COAs attached. I hereby certify that the information above is true and complete to the best of my knowledg SIGNATURE TITLE: AGENT	C X TAG TOC. O' (13-3/8" CSG.SHOE, T/DLWR.); TAG. O' (T/SALT); WOC X TAG TOC. O'ANHY,20" CSG.SHOE); WOC X TAG TOC. O'CMT. @ 63'-3' TO CSGS.X INSTALL DRY HOLE EM W/ A STEEL TANK AND HAUL e and belief. DATE: 07/27/2023
3) PUMP (80) SXS. CLASS "H" CMT. @ 12,203'-12,003' (T/WLCP.). 4) PUMP (75) SXS. CLASS "H" CMT. @ 8,969'-8,789' (T/BNSG.) 5) PERF. X ATTEMPT TO SQZ. (100) SXS. CLASS "C" CMT. @ 4,950'-4,81 6) PERF. X ATTEMPT TO SQZ. (75) SXS. CLASS "C" CMT. @ 1,190'-1,080 7) PERF. X ATTEMPT TO SQZ. (90) SXS. CLASS "C" CMT. @ 985'-842' (T 8) PERF. X CIRC. TO SURF., FILLING ALL ANNULI, (40) SXS. CLASS "C" 9) DIG OUT X CUT OFF WELLHEAD 3'B.G.L.; WELD ON STEEL PLATE MARKER. DURING THIS PROCEDURE WE PLAN TO USE THE CLOSED-LOOP SYST CONTENTS TO THE REQURED DISPOSAL, PER OCD RULE 19.15.15. Adhere to NMOCD COAs attached. I hereby certify that the information above is true and complete to the best of my knowledg SIGNATURE TITLE: AGENT Type or print name: DAVID A. EYLER E-mail address: DEYLER@MILAGRO-For State Use Only	C X TAG TOC. O' (13-3/8" CSG.SHOE, T/DLWR.); TAG. O' (T/SALT); WOC X TAG TOC. O'ANHY,20" CSG.SHOE); WOC X TAG TOC. O'CMT. @ 63'-3' TO CSGS.X INSTALL DRY HOLE EM W/ A STEEL TANK AND HAUL DATE: 07/27/2023 RES.COM PHONE: 432.687.3033
3) PUMP (80) SXS. CLASS "H" CMT. @ 12,203'-12,003' (T/WLCP.). 4) PUMP (75) SXS. CLASS "H" CMT. @ 8,969'-8,789' (T/BNSG.) 5) PERF. X ATTEMPT TO SQZ. (100) SXS. CLASS "C" CMT. @ 4,950'-4,81 6) PERF. X ATTEMPT TO SQZ. (75) SXS. CLASS "C" CMT. @ 1,190'-1,080 7) PERF. X ATTEMPT TO SQZ. (90) SXS. CLASS "C" CMT. @ 985'-842' (T 8) PERF. X CIRC. TO SURF., FILLING ALL ANNULI, (40) SXS. CLASS "C" 9) DIG OUT X CUT OFF WELLHEAD 3'B.G.L.; WELD ON STEEL PLATE "MARKER. DURING THIS PROCEDURE WE PLAN TO USE THE CLOSED-LOOP SYST CONTENTS TO THE REQURED DISPOSAL, PER OCD RULE 19.15.15. Adhere to NMOCD COAs attached. I hereby certify that the information above is true and complete to the best of my knowledg SIGNATURE Type or print name: DAVID A. EYLER E-mail address: DEYLER@MILAGRO-	C X TAG TOC. O' (13-3/8" CSG.SHOE, T/DLWR.); TAG. O' (T/SALT); WOC X TAG TOC. O'ANHY,20" CSG.SHOE); WOC X TAG TOC. O'CMT. @ 63'-3' TO CSGS.X INSTALL DRY HOLE EM W/ A STEEL TANK AND HAUL DATE: 07/27/2023 RES.COM PHONE: 432.687.3033

CONDITIONS FOR PLUGGING AND ABANDONMENT

OCD - Southern District

The following is a guide or checklist in preparation of a plugging program, this is not all inclusive and care must be exercised in establishing special plugging programs in unique and unusual cases, Notify NMOCD District Office II at (575)-748-1283 at least 24 hours before beginning work. After MIRU rig will remain on well until it is plugged to surface. OCD is to be notified before rig down. Company representative will be on location during plugging procedures.

- A notice of intent to plug and abandon a wellbore is required to be approved before plugging
 operations are conducted. A cement evaluation tool is required in order to ensure isolation of
 producing formations, protection of water and correlative rights. A cement bond log or other
 accepted cement evaluation tool is to be provided to the division for evaluation if one has not
 been previously run or if the well did not have cement circulated to surface during the original
 casing cementing job or subsequent cementing jobs. Insure all bradenheads have been
 exposed, identified and valves are operational prior to rig up.
- 2. Closed loop system is to be used for entire plugging operation. Upon completion, contents of steel pits are to be hauled to a permitted disposal location.
- 3. Trucking companies being used to haul oilfield waste fluids to a disposal commercial or private shall have an approved NMOCD C-133 permit. A copy of this permit shall be available in each truck used to haul waste products. It is the responsibility of the operator as well as the contractor, to verify that this permit is in place prior to performing work. Drivers shall be able to produce a copy upon request of an NMOCD Field inspector.
- 4. Filing a subsequent C-103 will serve as notification that the well has been plugged.
- 5. A final C-103 shall be filed (and a site inspection by NMOCD Inspector to determine if the location is satisfactorily cleaned, all equipment, electric poles and trash has been removed to Meet NMOCD standards) before bonding can be released.
- 6. If work has not begun within 1 Year of the approval of this procedure, an extension request must be file stating the reason the well has not been plugged.
- 7. Squeeze pressures are not to exceed 500 psi, unless approval is given by NMOCD.
- 8. Produced water will not be used during any part of the plugging operation.
- 9. Mud laden fluids must be placed between all cement plugs mixed at 25 sacks per 100 bbls of water.
- 10. All cement plugs will be a minimum of 100' in length or a minimum of 25 sacks of cement, whichever is greater. 50' of calculated cement excess required for inside casing plugs and 100% calculated cement excess required on outside casing plugs.
- 11. Class 'C' cement will be used above 7500 feet.
- 12. Class 'H' cement will be used below 7500 feet.
- 13. A cement plug is required to be set 50' above and 50' below, casing stubs, DV tools, attempted casing cut offs, cement tops outside casing, salt sections and anywhere the casing is perforated, these plugs require a 4 hour WOC and then will be tagged
- 14. All Casing Shoes Will Be Perforated 50' below shoe depth and Attempted to be Squeezed, cement needs to be 50' above and 50' Below Casing Shoe inside the Production Casing.

- 16. When setting the top out cement plug in production, intermediate and surface casing, wellbores should remain full at least 30 minutes after plugs are set
- 17. A CIBP is to be set within 100' of production perforations, capped with 100' of cement, WOC 4 hours and tag.
- 18. A CIBP with 35' of cement may be used in lieu of the 100' plug if set with a bailer. This plug will be placed within 100' of the top perforation, (WOC 4 hrs and tag).
- 19. No more than 3000' is allowed between cement plugs in cased hole and 2000' in open hole.
- 20. Some of the Formations to be isolated with cement plugs are: These plugs to be set to isolate formation tops
 - A) Fusselman
 - B) Devonian
 - C) Morrow
 - D) Wolfcamp
 - E) Bone Springs
 - F) Delaware
 - G) Any salt sections
 - H) Abo
 - 1) Glorieta
 - J) Yates.
 - K) Cherry Canyon Eddy County
 - L) Potash---(In the R-111-P Area (Page 3 & 4), a solid cement plug must be set across the salt section. Fluid used to mix the cement shall be saturated with the salts that are common to the section penetrated and in suitable proportions, not more than 3% calcium chloride (by weight of cement) will be considered the desired mixture whenever possible, WOC 4 hours and tag, this plug will be 50' below the bottom and 50' above the top of the Formation.
- 21. If cement does not exist behind casing strings at recommended formation depths, the casing can be cut and pulled with plugs set at recommended depths. If casing is not pulled, perforations will be shot and cement squeezed behind casing, WOC and tagged. These plugs will be set 50' below formation bottom to 50' above formation top inside the casing

DRY HOLE MARKER REQUIRMENTS

The operator shall mark the exact location of the plugged and abandoned well with a steel marker not less than four inches in diameter, 3' below ground level with a plate of at least ¼" welded to the top of the casing and the dry hole marker welded on the plate with the following information welded on the dry hole marker:

1. Operator name 2. Lease and Well Number 3.API Number 4. Unit Letter 5. Quarter Section (feet from the North, South, East or West) 6. Section, Township and Range 7. Plugging Date 8. County (SPECIAL CASES)------AGRICULTURE OR PRARIE CHICKEN BREEDING AREAS

In these areas, a below ground marker is required with all pertinent information mentioned above on a plate, set 3' below ground level, a picture of the plate will be supplied to NMOCD for record, the exact location of the marker (longitude and latitude by GPS) will be provided to NMOCD (We typically require a current survey to verify the GPS)

SITE REMEDIATION DUE WITHIN ONE YEAR OF WELL PLUGGING COMPLETION

R-111-P Area

T 18S - R 30E

Sec 10 Unit P. Sec 11 Unit M,N. Sec 13 Unit L,M,N. Sec 14 Unit C -P. Sec 15 Unit A G,H,I,J,K,N,O,P. Sec 22 Unit All except for M. Sec 23, Sec 24 Unit C,D,E,L, Sec 26 Unit A-G, Sec 27 Unit A,B,C

T 19S - R 29E

Sec 11 Unit P. Sec 12 Unit H-P. Sec 13. Sec 14 Unit A,B,F-P. Sec 15 Unit P. Sec 22 Unit A,B,C,F,G,H,I,J K,N,O,P. Sec 23. Sec 24. Sec 25 Unit D. Sec 26 Unit A-F. Sec 27 Unit A,B,C,F,G,H.

T 19S - R 30E

Sec 2 Unit K,L,M,N. Sec 3 Unit I,L,M,N,O,P. Sec 4 Unit C,D,E,F,G,I-P. Sec 5 Unit A,B,C,E-P. Sec 6 Unit I,O,P. Sec 7 – Sec 10. Sec 11 Unit D, G—P. Sec 12 Unit A,B,E-P. Sec 13 Unit A-O. Sec 14-Sec 18. Sec 19 Unit A-L, P. Sec 20 – Sec 23. Sec 24 Unit C,D,E,F,L,M,N. Sec 25 Unit D. Sec 26 Unit A-G, I-P. Sec 27, Sec 28, Sec 29 Unit A,B,C,D,F,G,H,I,J,O,P. Sec 32 Unit A,B,G,H,I,J,N,O,P. Sec 33. Sec 34. Sec 35. Sec 36 Unit D,E,F,I-P.

T 19S - R 31E

Sec 7 Unit C,D,E,F,L. Sec 18 Unit C,D,E,F,G,K,L. Sec 31 Unit M. Sec 34 Unit P. Sec 35 Unit M,N,O. Sec 36 Unit O,P.

T 20S - R 29E

Sec 1 Unit H,I,P. Sec 13 Unit E,L,M,N. Sec 14 Unit B-P. Sec 15 Unit A,H,I,J,N,O,P. Sec 22 Unit A,B,C,F,G,H,I,J,O,P. Sec 23. Sec 24 Unit C,D,E,F,G,J-P. Sec 25 Unit A-O. Sec 26. Sec 27 Unit A,B,G,H,I,J,O,P. Sec 34 Unit A,B,G,H. Sec 35 Unit A-H. Sec 36 Unit B-G.

T 20S - R 30E

Sec 1 – Sec 4. Sec 5 Unit A,B,C,E-P. Sec 6 Unit E,G-P. Sec 7 Unit A-H,I,J,O,P. Sec 8 – 17. Sec 18 Unit A,B,G,H,I,J,O,P. Sec 19 Unit A,B,G,H,I,J,O,P. Sec 20 – 29. Sec 30 Unit A-L,N,O,P. Sec 31 Unit A,B,G,H,I,P. Sec 32 – Sec 36.

T 20S - R 31E

Sec 1 Unit A,B,C,E-P. Sec 2. Sec 3 Unit A,B,G,H,I,J,O,P. Sec 6 Unit D,E,F,J-P. Sec 7. Sec 8 Unit E-P. Sec 9 Unit E,F,J-P. Sec 10 Unit A,B,G-P. Sec 11 – Sec 36.

T 21S - R 29E

Sec 1 – Sec 3. Sec 4 Unit L1 – L16,I,J,K,O,P. Sec 5 Unit L1. Sec 10 Unit A,B,H,P. Sec 11 – Sec 14. Sec 15 Unit A,H,I. Sec 23 Unit A,B. Sec 24 Unit A,B,C,D,F,G,H,I,J,O,P. Sec 25 Unit A,O,P. Sec 35 Unit G,H,I,J,K,N,O,P. Sec 36 A,B,C,F – P.

T 21S - R 30E

Sec 1 – Sec 36

T 21S - R 31E

Sec 1 – Sec 36

T 22S - R 28E

Sec 36 Unit A,H,I,P.

T 22S - R 29E

Sec 1. Sec2. Sec 3 Unit I,J,N,O,P. Sec 9 Unit G – P. Sec 10 – Sec 16. Sec 19 Unit H,I,J. Sec 20 – Sec 28. Sec 29 Unit A,B,C,D,G,H,I,J,O,P. Sec 30 Unit A. Section 31 Unit C – P. Sec 32 – Sec 36

T 22S - R 30E

Sec 1 – Sec 36

T 22S - R 31E

Sec 1 – Sec 11. Sec 12 Unit B,C,D,E,F,L. Sec 13 Unit E,F,K,L,M,N. Sec 14 – Sec 23. Sec 24 Unit C,D,E,F,K,L,M,N. Sec 25 Unit A,B,C,D. Sec 26 Unit A,BC,D,G,H. Sec 27 – Sec 34.

T 23S - R 28E

Sec 1 Unit A

T 23S - R 29E

Sec 1 – Sec 5. Sec 6 Unit A – I, N,O,P. Sec 7 Unit A,B,C,G,H,I,P. Sec 8 Unit A – L, N,O,P. Sec 9 – Sec 16. Sec 17 Unit A,B,G,H,I,P. Sec 21 – Sec 23. Sec 24 Unit A – N. Sec 25 Unit D,E,L. Sec 26. Sec 27. Sec 28 Unit A – J, N,O,P. Sec 33 Unit A,B,C. Sec 34 Unit A,B,C,D,F,G,H. Sec 35. Sec 36 Unit B,C,D,E,F,G,K,L.

T 23S - R 30E

Sec 1 – Sec 18. Sec 19 Unit A – I,N,O,P. Sec 20, Sec 21. Sec 22 Unit A – N, P. Sec 23, Sec 24, Sec 25. Sec 26 Unit A,B,F-P. Sec 27 Unit C,D,E,I,N,O,P. Sec 28 Unit A – H, K,L,M,N. Sec 29 Unit A – J, O,P. Sec 30 Unit A,B. Sec 32 A,B. Sec 33 Unit C,D,H,I,O,P. Sec 34, Sec 35, Sec 36.

T 23S - R 31E

Sec 2 Unit D,E,J,O. Sec 3 – Sec 7. Sec 8 Unit A – G, K – N. Sec 9 Unit A,B,C,D. Sec 10 Unit D,P. Sec 11 Unit G,H,I,J,M,N,O,P. Sec 12 Unit E,L,K,M,N. Sec 13 Unit C,D,E,F,G,J,K,L,M,N,O. Sec 14. Sec 15 Unit A,B,E – P. Sec 16 Unit I, K – P. Sec 17 Unit B,C,D,E, I – P. Sec 18 – Sec 23. Sec 24 Unit B – G, K,L,M,N. Sec 25 Unit B – G, J,K,L. Sec 26 – Sec 34. Sec 35 Unit C,D,E.

T 24S - R 29E

Sec 2 Unit A, B, C, D. Sec 3 Unit A

T 24S - R 30E

Sec 1 Unit A – H, J – N. Sec 2, Sec 3. Sec 4 Unit A,B,F – K, M,N,O,P. Sec 9 Unit A – L. Sec 10 Unit A – L, O,P. Sec 11. Sec 12 Unit D,E,L. Sec 14 Unit B – G. Sec 15 Unit A,B,G,H.


T 24S - R 31E

Sec 3 Unit B – G, J – O. Sec 4. Sec 5 Unit A – L, P. Sec 6 Unit A – L. Sec 9 Unit A – J, O,P. Sec 10 Unit B – G, K – N. Sec 35 Unit E – P. Sec 36 Unit E,K,L,M,N.

T 25S - R 31E

Sec 1 Unit C,D,E,F. Sec 2 Unit A – H.

Resubmid Ligora CD Appropriate 2 in 186:21 PM Office	Death Of I to 11 I in		Form CPuge 6 of Revised August 1, 2011
<u>District I</u> – (575) 393-6161 1625 N. French Dr., Hobbs, NM 88240	District I – (575) 393-6161 Energy, Minerals and Natural Resources 1625 N. French Dr., Hobbs, NM 88240		
<u>District II</u> – (575) 748-1283 811 S. First St., Artesia, NM 88210	OIL CONSERVATION	DIVISION $\frac{30-025-3}{5}$	
<u>District III</u> – (505) 334-6178	1220 South St. Fran		tte Type of Lease
1000 Rio Brazos Rd., Aztec, NM 87410 <u>District IV</u> – (505) 476-3460 1220 S. St. Francis Dr., Santa Fe, NM 87505 Santa Fe, NM 87505			Oil & Gas Lease No.
SUNDRY NOTICES AND REPORTS ON WELLS (DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.) 1. Type of Well: Oil Well Gas Well X Other 2. Name of Operator			Name or Unit Agreement Name LLS UNIT
			Number
			D Number
3. Address of Operator	CIMAREX ENERGY CO. OF COLORADO 3. Address of Operator 6001 DEAUVILLE BLVD., SUITE 300N, MIDLAND, TEXAS 79706		
4. Well Location	1,		LLS; WOLFCAMP (GAS)
	feet from the SOUTH line	and 1500 feet from the	WEST line
Section 32	Township 25S		NMPM LEA County
	Elevation (Show whether DR,		
	3,387' – GR		
12. Check Appro	opriate Box to Indicate N		
NOTICE OF INTEN			NT REPORT OF:
	JG AND ABANDON X	REMEDIAL WORK COMMENCE DRILLING OP	☐ ALTERING CASING ☐ NS.☐ P AND A
	ANGE PLANS ☐	CASING/CEMENT JOB	NO. FANDA
DOWNHOLE COMMINGLE			
OTHER:		OTHER:	
13. Describe proposed or completed of starting any proposed work). Sproposed completion or recompleted proposed completion or recompleted proposed completion or recompleted proposed completion or recompleted proposed completed proposed completed proposed	SEE RULE 19.15.7.14 NMAC	pertinent details, and give pertinent. For Multiple Completions:	Attach wellbore diagram of
1) SET 7" CIBP @ 13,650'; DU 2) PUMP (65) SXS. CLASS "H	UMP BAIL 35' CLASS "H" C F" CMT. @ 12,650'-12,450' (CMT. @ 13,650'-13,615'; CIR	C. WELL W/ M.L.F.
3) PUMP (80) SXS. CLASS "F	H'' CMT. @ 12,203'-12,003' (T/WLCP.).	100.
4) PUMP (75) SXS. CLASS ''1	H'' CMT. @ 8,969'-8,789' (T	/BNSG.)	CCC CHOE T/DI W/D) . TAC
5) PERF. X ATTEMPT TO SQ6) PERF. X ATTEMPT TO SQ	(22. (100) SXS. CLASS "C" CI (22. (75) SXS. CLASS "C" CM	M1. @ 4,950'-4,810' (13-3/8' IT. @ 1.190'-1.080' (T/SALT	'CSG.SHOE, T/DLWR.); TAG. 'S: WOC X TAG TOC.
7) PERF. X ATTEMPT TO SQ	Z. (90) SXS. CLASS "C" CM	IT. @ 985'-842' (T/ANHY,20	"CSG.SHOE); WOC X TAG TOC.
8) PERF. X CIRC. TO SURF.,	FILLING ALL ANNULI, (40) SXS. CLASS "C" CMT. @	63'-3'
 DIG OUT X CUT OFF WEI MARKER. 	LLHEAD 3'B.G.L.; WELD O	N STEEL PLATE TO CSGS.	X INSTALL DRY HOLE
MARKER.			
DURING THIS PROCEDURE V			STEEL TANK AND HAUL
DURING THIS PROCEDURE V CONTENTS TO THE REQURE			STEEL TANK AND HAUL
			STEEL TANK AND HAUL
			STEEL TANK AND HAUL
CONTENTS TO THE REQURE	D DISPOSAL, PER OCD RU	LE 19.15.15.	
	D DISPOSAL, PER OCD RU	est of my knowledge and belie	
I hereby certify that the information above SIGNATURE Type or print name: DAVID A. EYLER	e is true and complete to the be	est of my knowledge and belie	DATE: 07/27/2023
I hereby certify that the information above	e is true and complete to the be	est of my knowledge and belie	DATE: 07/27/2023

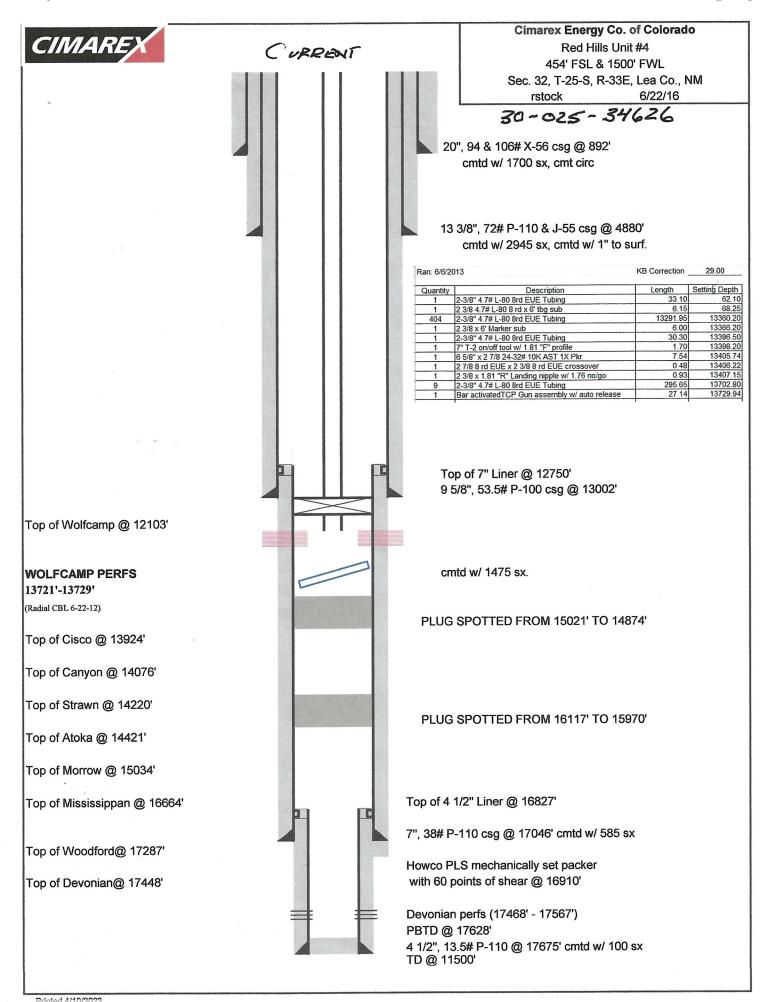

>25-34426 Cimarex Energy Co. of Colorado CIMAREX Red Hills Unit #4 454' FSL & 1500' FWL ROPOSEL Sec. 32, T-25-S, R-33E, Lea Co., NM T/ANHY~ 935' 6/22/16 rstock Perf. x circ.(40)5xs@63'-3' TISALT ~ 1,135' 20", 94 & 106# X-56 csg @ 892' TIDIWR- 4,873' cmtd w/ 1700 sx, cmt circ - PERF. X 542. (90) SXS-C 985-842-TAG-7/BNSG-~8,879' WILLE TAKE PERF. X 502. (75) \$x\$ @ 1,190'-1,080'-TAG T/WICP. -12,103' 13 3/8", 72# P-110 & J-55 csg @ 4880' cmtd w/ 2945 sx, cmtd w/ 1" to surf. T/CISCO-13,924' PERF. X 502. (100) SXS @ 4,950-4,810-THG Pump(65) SXSC 6,500'-6,346' M.h.F. Pump (75) 5x50 8,969-8,789' Pump (80) =x5.0 12,203-12,003 Amp (65) 5x4.0 12,650'-12,450'-1746 Top of 7" Liner @ 12750' 95/8", 53.5# P-100 csg @ 13002'
Dump BAIL 35 CMI CO 13,650 SET 7" CIBP@13,650 cmtd w/ 1475 sx. WOLFCAMP PERFS 13721'-13729' 06/05/13 (Radial CBL 6-22-12) PLUG SPOTTED FROM 15021' TO 14874' /2/61/10 PLUG SPOTTED FROM 16117' TO 15970' 41 30 10 Top of 4 1/2" Liner @ 16827' 7", 38# P-110 csg @ 17046' cmtd w/ 585 sx Howco PLS mechanically set packer with 60 points of shear @ 16910' Devonian perfs (17468' - 17567') PBTD @ 17628' 4 1/2", 13.5# P-110 @ 17675' cmtd w/ 100 sx TD @ 11500' DAE 07/26/23

District I
1625 N. French Dr., Hobbs, NM 88240
Phone: (575) 393-6161 Fax: (575) 393-0720

District II 811 S. First St., Artesia, NM 88210 Phone:(575) 748-1283 Fax:(575) 748-9720

District III 1000 Rio Brazos Rd., Aztec, NM 87410 Phone:(505) 334-6178 Fax:(505) 334-6170

1220 S. St Francis Dr., Santa Fe, NM 87505 Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico Energy, Minerals and Natural Resources Oil Conservation Division 1220 S. St Francis Dr. **Santa Fe, NM 87505**

CONDITIONS

Action 245323

CONDITIONS

Operator:	OGRID:
CIMAREX ENERGY CO. OF COLORADO	162683
6001 Deauville Blvd, Ste 300N	Action Number:
Midland, TX 79706	245323
	Action Type:
	[C-103] NOI Plug & Abandon (C-103F)

CONDITIONS

Created By	Condition	Condition Date	
john.harrison	Approved w/ conditions. Adhere to NMOCD COAs attached.	7/31/2023	