

Submit 1 Copy To Appropriate District Office
 District I – (575) 393-6161
 1625 N. French Dr., Hobbs, NM 88240
 District II – (575) 748-1283
 811 S. First St., Artesia, NM 88210
 District III – (505) 334-6178
 1000 Rio Brazos Rd., Aztec, NM 87410
 District IV – (505) 476-3460
 1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
 Energy, Minerals and Natural Resources

Form C-103
 Revised July 18, 2013

OIL CONSERVATION DIVISION
 1220 South St. Francis Dr.
 Santa Fe, NM 87505

SUNDRY NOTICES AND REPORTS ON WELLS (DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)		WELL API NO. 30-025-31061
1. Type of Well: Oil Well <input checked="" type="checkbox"/> Gas Well <input type="checkbox"/> Other <input type="checkbox"/>		5. Indicate Type of Lease STATE <input checked="" type="checkbox"/> FEE <input type="checkbox"/>
2. Name of Operator DWIGHT A. TIPTON		6. State Oil & Gas Lease No. L-332
3. Address of Operator 1008 W. BROADWAY, HOBBS, NM 88240		7. Lease Name or Unit Agreement Name SUNRAY A 6822 LTD
4. Well Location Unit Letter <u>G</u> : <u>1980</u> feet from the <u>NORTH</u> line and <u>1980</u> feet from the <u>EAST</u> line Section <u>36</u> Township <u>9S</u> Range <u>33E</u> NMPM County <u>LEA</u>		8. Well Number # #3
11. Elevation (Show whether DR, RKB, RT, GR, etc.) 4276' GR		9. OGRID Number 006550
		10. Pool name or Wildcat LANE SAN ANDRES 37000

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:

- PERFORM REMEDIAL WORK
- TEMPORARILY ABANDON
- PULL OR ALTER CASING
- DOWNHOLE COMMINGLE
- CLOSED-LOOP SYSTEM
- OTHER:
- PLUG AND ABANDON
- CHANGE PLANS
- MULTIPLE COMPL

SUBSEQUENT REPORT OF:

- REMEDIAL WORK
- COMMENCE DRILLING OPNS.
- CASING/CEMENT JOB
- OTHER:
- ALTERING CASING
- P AND A

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 19.15.7.14 NMAC. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

4/24/24 – NOTIFY NMOCD. MIRU.
 4/26/24 – SET CIBP @ 4600' & TAGGED. PRESSURE TEST CSG TO 500 PSI. CIRC MLF. SPOTTED 20 SX CLASS "C" CEMENT FROM 4600' - 4403'. TAGGED @ 4384'.
 4/29/24 – RUN CBL. KERRY @ OCD APPROVED COMBINING SAN ANDREAS & QUEEN PLUG. PLUGS 2 & 3 SPOTTED 20 SX CLASS C CEMENT FROM 3968'-3390'. SPOTTED 20 SX CLASS "C" CEMENT FROM 2,722' TO 2,529'. SPOTTED 20 SX CLASS "C" CEMENT FROM 2103'-1906'.
 4/30/24 - PERF'D @ 575'. KERRY W/OCD APPROVED CIRCULATING CMT TO SURFACE. CIRCULATED 180 SX CLASS "C" CEMENT FROM 575'-SURFACE.
 5/3/24 – CUTOFF WH & INSTALLED MARKER PROHIBITION.

Spud Date:

Rig Release Date:

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE  TITLE P & A ENGINEER DATE 5/13/2024


Type or print name KELTON WOODARD E-mail address: kelton@jmrservices.com PHONE: (432) 618-1050
For State Use Only

APPROVED BY: _____ TITLE _____ DATE _____
 Conditions of Approval (if any): _____

10:01



WELLSITE NAVIGATOR

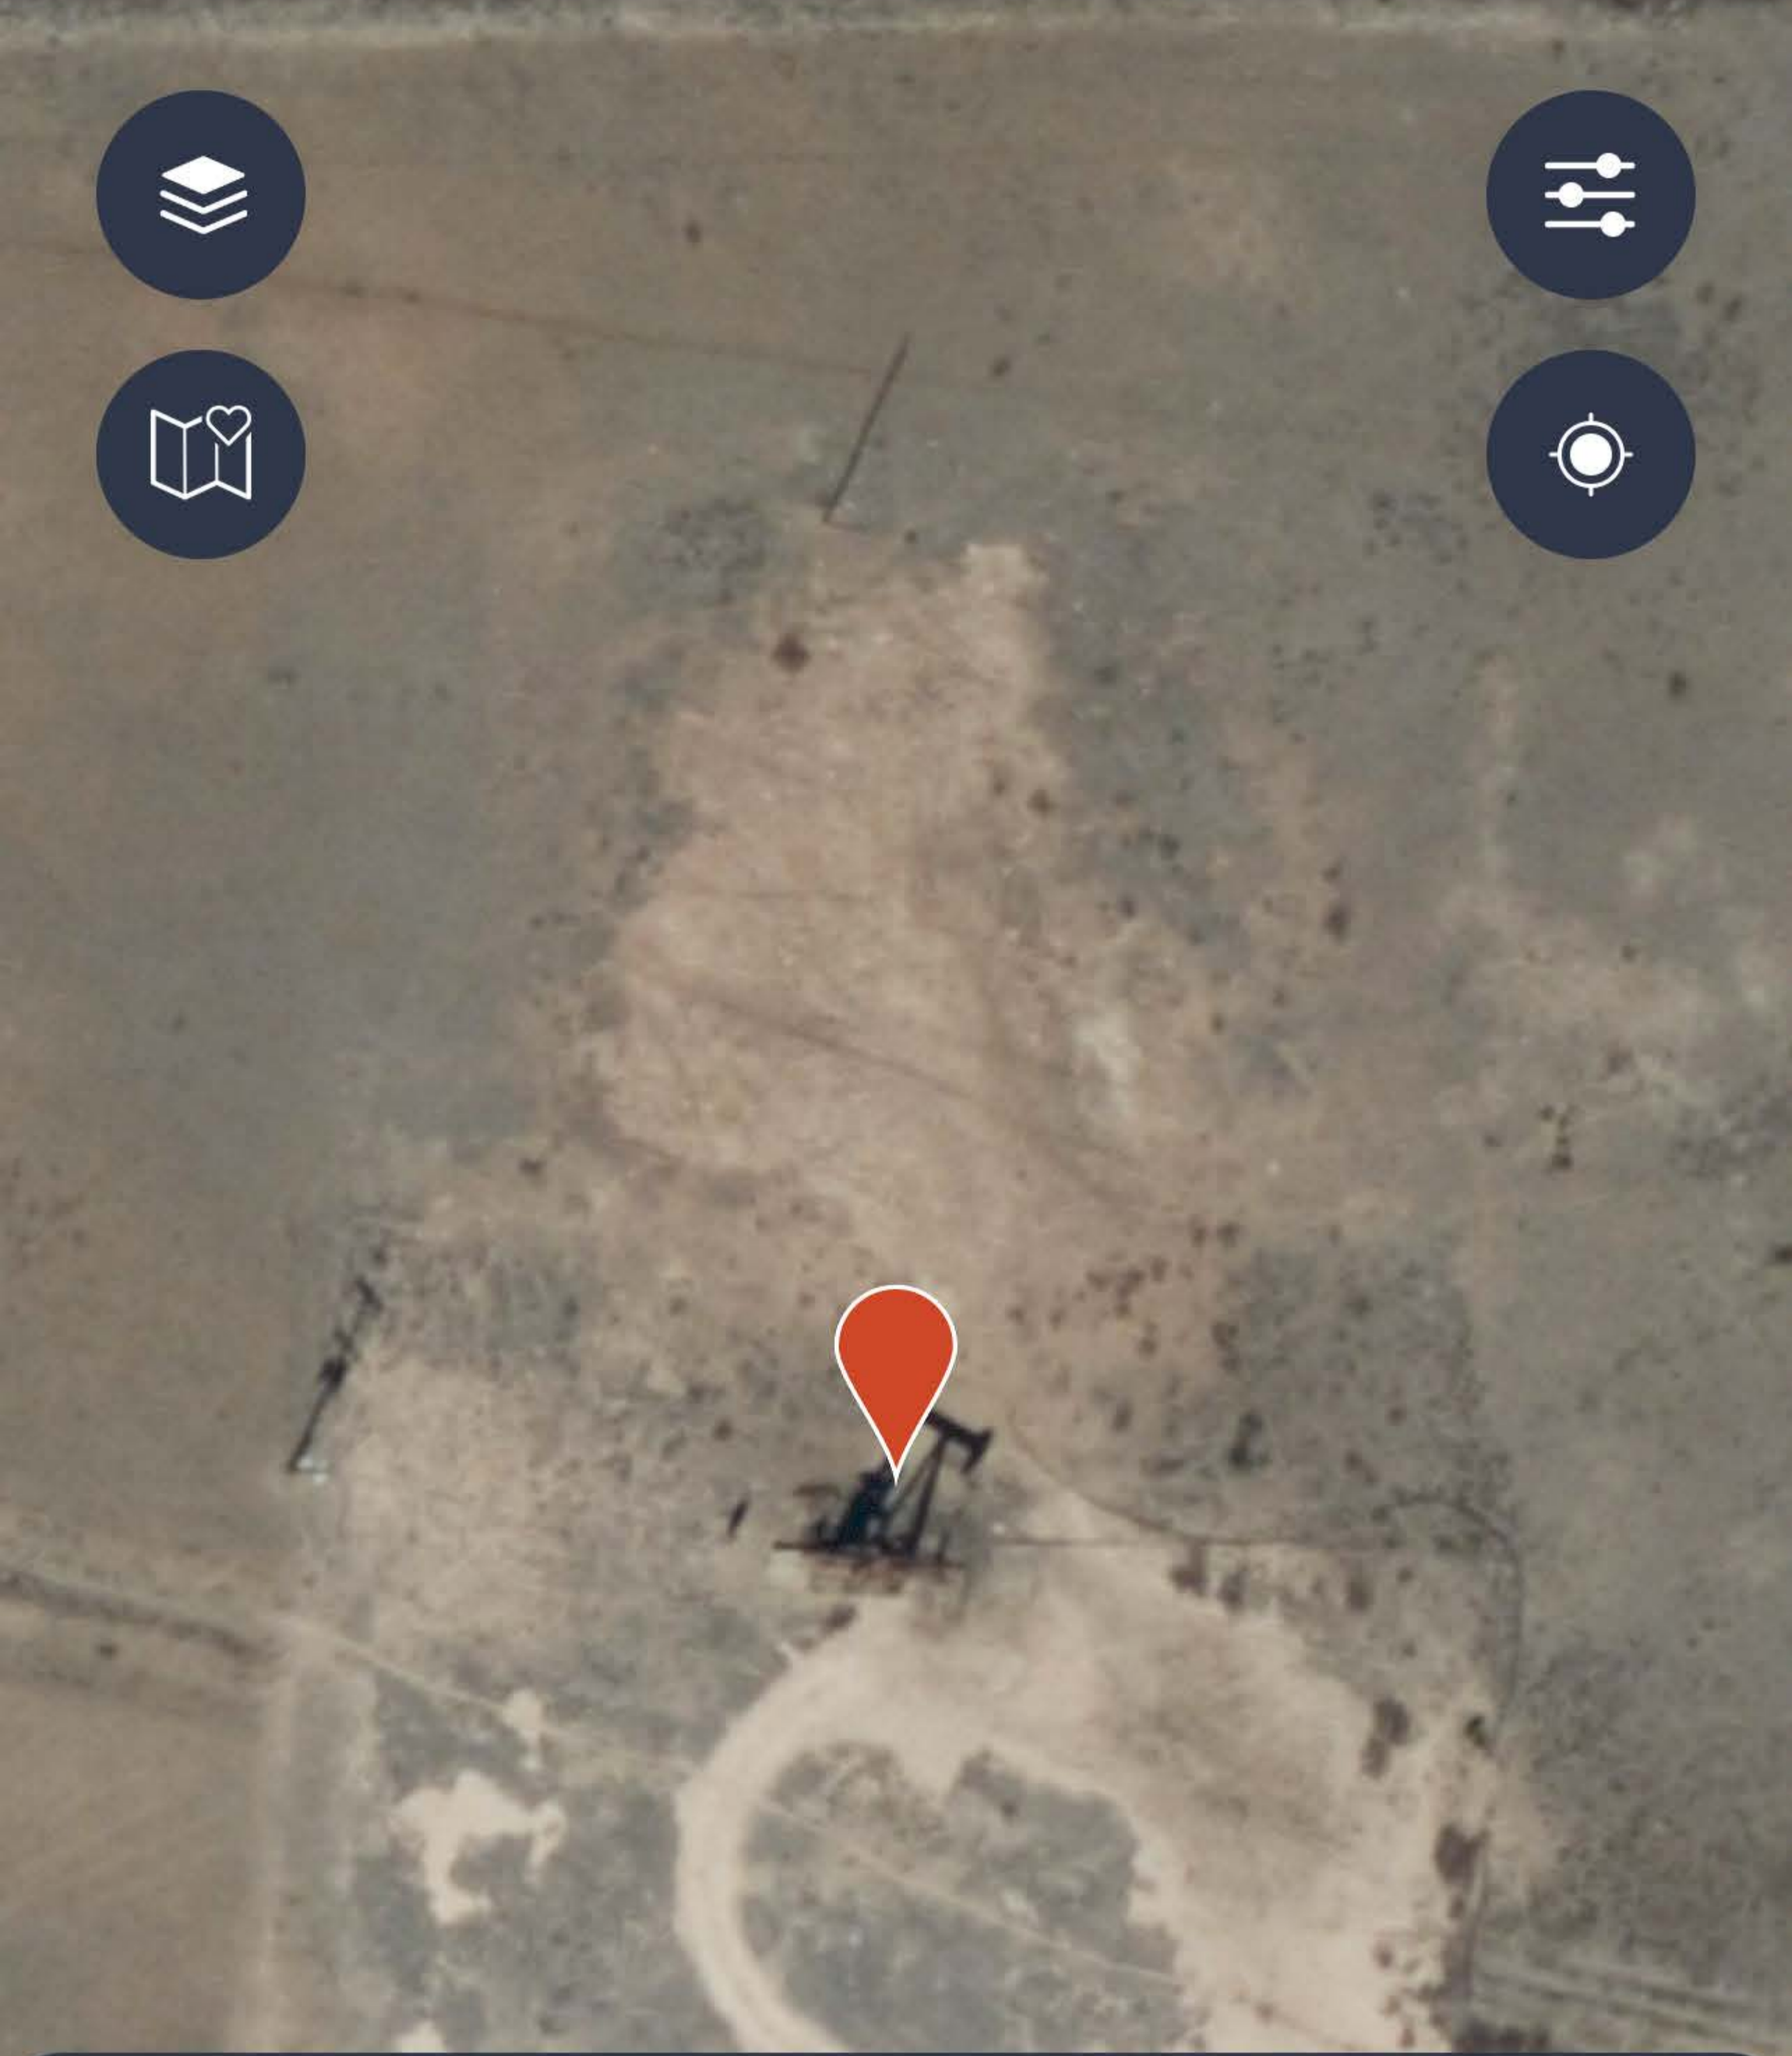

DWIGHT A TIPTON SUNRAY A 6822 LTD #003

API: 3002531061
Lat: 33.492216
Status: ACTIVE

County: LEA
Long: -103.518839



Map



Search



Favorites




My Pins

DWIGHT A. TIPTON
30-025-31061
Sunray AG822 LTD #3
WL-G 1980 FNL & 1980 FEL
S-36T-95R-33E
LEA CO NM
PA 4/30/24
33.4921746,
103.5108236

Well Sunray A 6822 Ltd. #3 KB 4291
 API 30-025-31061 GL 4278

Surface	
Hole	
Casing	8-5/8" 24#
Depth	525
Cmt	300 sx
TOC	0

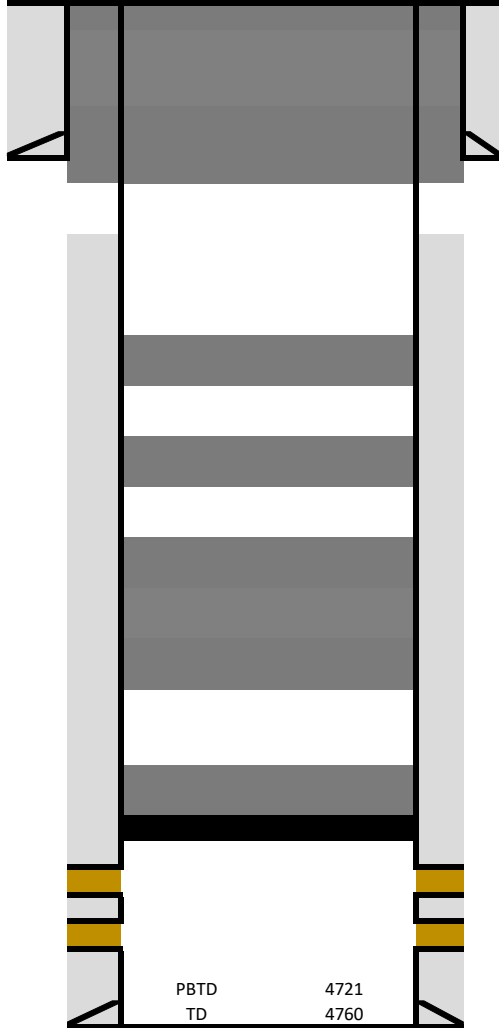

8. Perf & Circ 180 sx Class C cmt from 575' to Surface. (Surf Shoe, Surface Plug)
7. Spotted 20 sx class C cmt from 2,103' to 1,906' (Anhydrite)
6. Spotted 20 sx class C cmt from 2,722' to 2,529' (Yates)
4. Spotted 60 sx class C cmt 3,968' to 3,390'. (San Andres, Queen)
3. Circ hole with 10ppg brine. Pressure Test @500psi for 30min. Run CBL.
2. Spotted 20sx class C cmt from 4,600' to 4,500'. Tagged @ 4,384'
1. Set CIBP @4,600'

Production	
Hole	7-7/8"
Casing	5-1/2" 14#
Depth	4760
Cmt	975 sx
TOC	990

Completion Info				
Stage	Top	Bot	Zone	Holes
1	4638	4646	San Andres	17

District I
 1625 N. French Dr., Hobbs, NM 88240
 Phone:(575) 393-6161 Fax:(575) 393-0720

District II
 811 S. First St., Artesia, NM 88210
 Phone:(575) 748-1283 Fax:(575) 748-9720

District III
 1000 Rio Brazos Rd., Aztec, NM 87410
 Phone:(505) 334-6178 Fax:(505) 334-6170

District IV
 1220 S. St Francis Dr., Santa Fe, NM 87505
 Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

CONDITIONS

Action 343628

CONDITIONS

Operator: DWIGHT A TIPTON 2009 South Main Street Lovington, NM 88260	OGRID: 6550
	Action Number: 343628
	Action Type: [C-103] Sub. Plugging (C-103P)

CONDITIONS

Created By	Condition	Condition Date
loren.diede	None	5/23/2024