

Well Name: DARCY ANN	Well Location: T26N / R12W / SEC 26 / SWSW / 36.4546769 / -108.0862074	County or Parish/State: SAN JUAN / NM
Well Number: 1	Type of Well: CONVENTIONAL GAS WELL	Allottee or Tribe Name: EASTERN NAVAJO
Lease Number: N0G98111309	Unit or CA Name: DARCY ANN	Unit or CA Number: NMNM103097
US Well Number: 3004529896	Operator: EPIC ENERGY LLC	

Notice of Intent

Sundry ID: 2809681

Type of Submission: Notice of Intent

Type of Action: Plug and Abandonment

Date Sundry Submitted: 08/30/2024

Time Sundry Submitted: 01:04

Date proposed operation will begin: 08/30/2024

Procedure Description: Epic Energy, LLC proposed to plug and abandon the Darcy Ann #1. Attached is the P&A Summary, WBD and Reclamation Plan.

Surface Disturbance

Is any additional surface disturbance proposed?: No

NOI Attachments

Procedure Description

Darcy_Ann_001_Reclamation_Plan_20240830130423.pdf

Darcy_Ann_1_P_A_Procedure_20240830130333.pdf

Well Name: DARCY ANN

Well Location: T26N / R12W / SEC 26 /
SWSW / 36.4546769 / -108.0862074County or Parish/State: SAN
JUAN / NM

Well Number: 1

Type of Well: CONVENTIONAL GAS
WELLAllottee or Tribe Name:
EASTERN NAVAJO

Lease Number: N0G98111309

Unit or CA Name: DARCY ANN

Unit or CA Number:
NMNM103097

US Well Number: 3004529896

Operator: EPIC ENERGY LLC

Conditions of Approval**Specialist Review**

Darcy_Ann_1_Geo_KR_20240904074157.pdf

2809681_NOIA_1_3004529896_KR_09042024_20240904074157.pdf

General_Requirement_PxA_20240904074144.pdf

Operator

I certify that the foregoing is true and correct. Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction. Electronic submission of Sundry Notices through this system satisfies regulations requiring a

Operator Electronic Signature: ARLEEN SMITH

Signed on: AUG 30, 2024 01:04 PM

Name: EPIC ENERGY LLC

Title: Regulatory Specialist

Street Address: 332 RD 3100

City: AZTEC

State: NM

Phone: (505) 327-4892

Email address: ARLEEN@WALSHENG.NET

Field

Representative Name:

Street Address:

City:

State:

Zip:

Phone:

Email address:

BLM Point of Contact

BLM POC Name: KENNETH G RENNICK

BLM POC Title: Petroleum Engineer

BLM POC Phone: 5055647742

BLM POC Email Address: krennick@blm.gov

Disposition: Approved

Disposition Date: 09/04/2024

Signature: Kenneth Rennick

P&A Procedure
EPIC Energy – Darcy Ann #1

Basin Fruitland Coal
1005' FSL & 920' FWL, Section 26, T26N, R12W
San Juan Co, New Mexico, API #30-045-29896

Plug & Abandonment Procedure:

Note: All cement volumes use 100% excess outside casing and 50' excess inside pipe. Stabilizing wellbore fluid will be 8.33 ppg, sufficient to balance all exposed formation pressures. All cement will be ASTM Class G neat 1.15 ft³/sk or equivalent. Cement circulated on surface and production casing strings. Volumes calculated off 4-1/2" 10.5# casing.

Prior to Mobilization

1. Notify BLM & NMOCD
2. Verify all cement volumes based on actual slurry to be pumped. Calculations based on 1.15 ft³/sk.
3. Comply with all COA's from BLM and NMOCD

P&A Procedure

1. MIRU PU and cement equipment
2. LD horses head. Unseat pump. POOH with pump/rods.
3. ND WH, NU BOP, RU rig floor and 2 3/8" handling tools.
4. POOH 2 3/8" production string set at ~1296'.
5. **Plug #1, 1248' – surface' (Perfs 1222'-1248')**: Tie onto WH. Mix and pump 25 sxs (28.7 cf) Class G w/ 2% CC & 0.25 pps cello-flake. Drop 96 ea 7/8" rubber frac balls. Continue pumping 98 sxs (112.7 cf) Class G w/ 2% CC & 0.25 pps cello-flake or until well fills up. WOC and ensure no fall back. Re-spot cement if necessary.
6. ND BOP and cut off wellhead below surface casing flange, top off casing and annulus as necessary. Install P&A marker and cut off and/or remove anchors. RD, MOL - Restore location per BLM stipulations. Take pictures from all cardinal directions. Reclaim location as per BLM COA's.

John Thompson
Engineer

Date Updated: April 2024 (RM)



7" Surf Csg @ 130' KB
Cmt w/ 45 sx, Cement to surface

Hole Size: 6-1/4"

Tbg: 4' tbg sub, 20jts of 2-3/8", 18jts of 2-3/8"
EOT=1268'KB
SN=1250'KB
Rods: 1ea 4', 6', 8' pony rods: 39ea 3/4" plain
Pump: 2" x 1-1/2" x 10' RWAC (Endurance)

Existing Perforations:
 FTC : 1222' - 1236'
 PC: 1243' - 1248'

EOT - 1268' KB
SN - 1250' KB

C/O to 1316' on 5/16/17

TD - 1370' KB
PBTD - 1346' KB

4-1/2", 10.5#, J55 at 1369' KB
160sx CI "B"
Cemented to surface 10bbbls.

Tubing Detail			
	Length	Top	Bottom
KB Adjustment		0	5.00
38 jts & 1ea. 4' subs 2-3/8"	1245.24	5.00	1250.24
SN	1.10	1250.24	1251.34
Mud Anchor	16.30	1251.34	1267.64
Note: bottom 18 jts are IPC			


Rod Detail -			
	Length	Top	Bottom
1ea. 4', 6', 8' 3/4"			
46 ea. 3/4" rods (bottom 7 guided)			

Pump Detail
2"x1-1/2"x10'RWAC pump w/ 12" strainer (Endurance Lift Solutions)

Pumping Unit:	_____	Gear Sheave:	_____
API Designation:	_____	Stroke Length:	_____
Samson Post SN:	_____	Gear Ratio:	_____
Gear Box SN:	_____	SPM:	_____
Structural Unbalance:	_____	Horse Power:	_____
Power:	_____	Volts:	_____
Power SN:	_____	Amps:	_____
Sheave Size:	_____	Belts:	_____

[illegible]

Well/Facility:	Darcy Ann #1	Well Status:	Producing
Operator:	Epic Energy,Ilc	Orig Oper:	Coleman O&G
Lease No.:	NO-G-9811-1309	Inj Interval:	n/a
Field:	WAW PC & FTC	API #:	30-045-29896
County:	San Juan	GR/KB:	6231' GL (5' KB)
State:	NM	TD:	1370' KB
Spud:	8/17/1999	PBTD:	1346' KB
Comp. Date:	9/6/1999	WI:	
1st Prod:		NRI:	
Xmas tree:			
Surface Loc:	1005' FSL & 920' FWL		
Sec-Twn-Rge:	Sec 26/T26N/12W		
Comments:	Proposed		

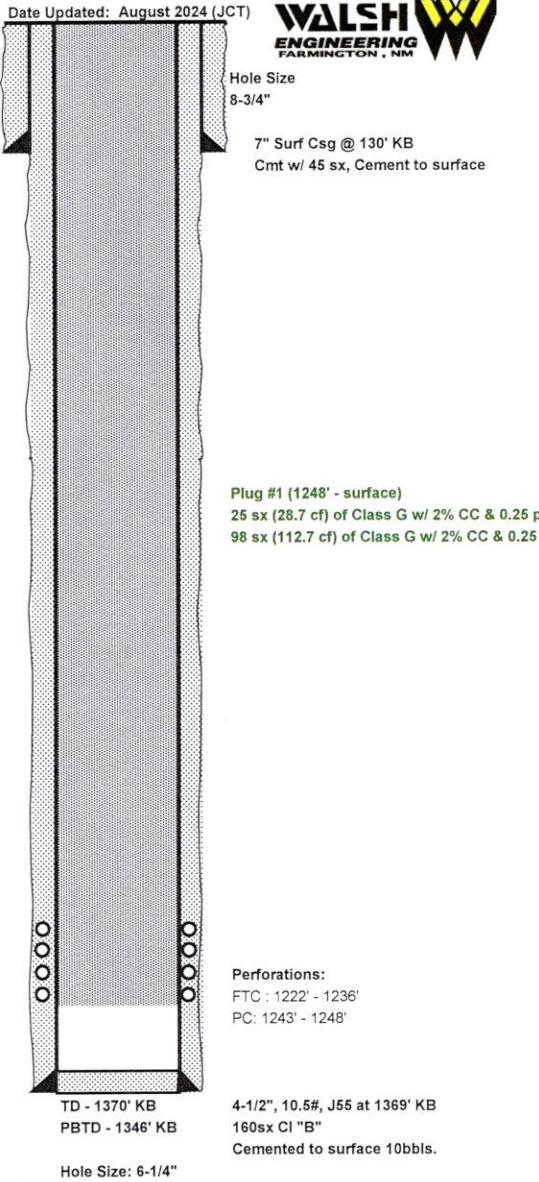[illegible]

Tubing Detail			
	Length	Top	Bottom
KB Adjustment		0	5.00

[illegible]

Pump Detail
2"x1-1/2"x10'RWAC pump w/ 12" strainer (Endurance Lift Solutions)

Pumping Unit:	_____	Gear Sheave:	_____
API Designation:	_____	Stroke Length:	_____
Samson Post SN:	_____	Gear Ratio:	_____
Gear Box SN:	_____	SPM:	_____
Structural Unbalance:	_____	Horse Power:	_____
Power:	_____	Volts:	_____
Power SN:	_____	Amps:	_____
Sheave Size:	_____	Belts:	_____

Final Reclamation Plan
Darcy Ann #001
30-045-29896
Section: 26 Township: 26N, Range: 12W, Unit: M
Footage: 1005 FSL & 920 FWL
36.4546852, -108.0868454

Final Reclamation – General Requirements

The entire well pad will be reclaimed to Bare Soil Reclamation Procedure (BSRP) reclamation standard upon abandonment/relinquishment. Final reclamation will be completed in accordance with Gold Book (USDI-USDA 2007). Epic Energy, LLC will contact the BLM-FFO prior to commencing earthwork.

Epic Energy, LLC will perform the following reclamation activities as needed:

- Underground production piping will be pulled and removed. All fluids found within pipelines will be removed.
- Anchors, tie downs and risers will be removed.
- All gravel on the well pad surface will be removed or buried.
- Fill material will be recontoured to the original topography of the site prior to development.
- The well pad will be ripped to reduce compaction and to establish a suitable root zone in preparation for topsoil replacement.
- Natural drainage patterns will be restored as near as possible to pre-disturbance conditions on the well pad. In areas where restoring the natural drainage will cause excessive disturbance and disrupt current or established natural rehabilitation processes, water bars or diversion ditches will be employed.
- Topsoil will be redistributed across the pad surface and disked to prepare the soil for seeding. Prior to seeding, all disturbed areas will be left with a rough surface to facilitate moisture and seed retention; vegetative brush will be placed at expected discharge areas to minimize sediment transport.
- After the well pad is recontoured, the surface will be ripped disked and reseeded with a disk typed seed drill or broadcast where conditions warrant. The seed drill will be equipped with a depth regulator to ensure even planting depths are achieved correlating to the specific plant species and soil types/s. Seed will be sagebrush, will be available to the BLM-FFO, BIA and JOGA prior to seeding. Seeding will be accomplished as soon as reasonable possible following completion or earthwork activities. The BLM- FFO will be notified prior to commencing with seed application and all surfaces will be seeded in accordance.
- Temporary and/or permanent storm water and erosion control BMPs will be employed across appropriate location around the pad as dictated by location drainage patterns and expected areas of disturbance and slopes. BMP selection will be determined by local factors and will be a combination of sediment and erosion controls deemed effective and low maintenance. Diversion ditches, soil blankets, and/or other suitable BMPs may be used in various combinations, as appropriate, during and after construction activities.
- The existing road will be recontoured in accordance with Gold Book (USDI-USDA 2007).

**Final Reclamation Plan
Darcy Ann #001
30-045-29896
Section: 26 Township: 26N, Range: 12W, Unit: M
Footage: 1005 FSL & 920 FWL
36.4546852, -108.0868454**

Final Reclamation – General Requirements

- A weed management program to control the introduction and spread of weed populations will be integrated if necessary and continue until successful reclamation is achieved.
- All surface equipment and trash, if any will be removed from the location and disposed of at an approved disposal facility.
- A Plugged and Abandoned (P&A) marker is placed and includes well information and GPS for future reference.

The long-term goal of final reclamation is to set the course for ecosystem restoration including the restoration of natural vegetation. Epic Energy LLC will avoid disturbance, to the greatest extent practicable in areas along the pad perimeter where healthy, mature and weed-free vegetation has become established. Epic Energy, LLC will focus reclamation efforts toward de-compaction, removing sharp/angular features to approximate natural contours, re-establishing natural drainage patterns, and re-vegetating the abandoned well pad.

Monitoring requirements will remain in effect in accordance with the Gold Book (USDI-USDA 2007). Epic Energy, LLC is responsible for monitoring reclamation progress and taking the necessary actions to ensure success. Epic Energy, LLC will submit to the BLM-FFO a FAN requesting approval of final abandonment/relinquishment.

**Final Reclamation Plan
Darcy Ann #001
30-045-29896
Section: 26 Township: 26N, Range: 12W, Unit: M
Footage: 1005 FSL & 920 FWL
36.4546852, -108.0868454**

Site Specific per Onsite August 8, 2024.

Onsite attendance: Shawna Martinez (Walsh), Arleen Smith (Walsh), Marie Florez (Walsh), Clay Green (Walsh), Roger Herrea (BLM), Daniel Sloan (Enterprise)

Epic Energy, LLC will perform the following reclamation activities:

Well Pad


- Remove equipment
- Push dirt from road along fence line towards pad
- Remove fencing around pad
- Seed with sagebrush
- Remove gravel and add to road

Access Road

- Leave access road due to few active well in the area.

Pipeline

- Enterprise will remove 25 ft meter skid from insulated union to meter riser.
- Install guardrail and tapped blind on meter riser.

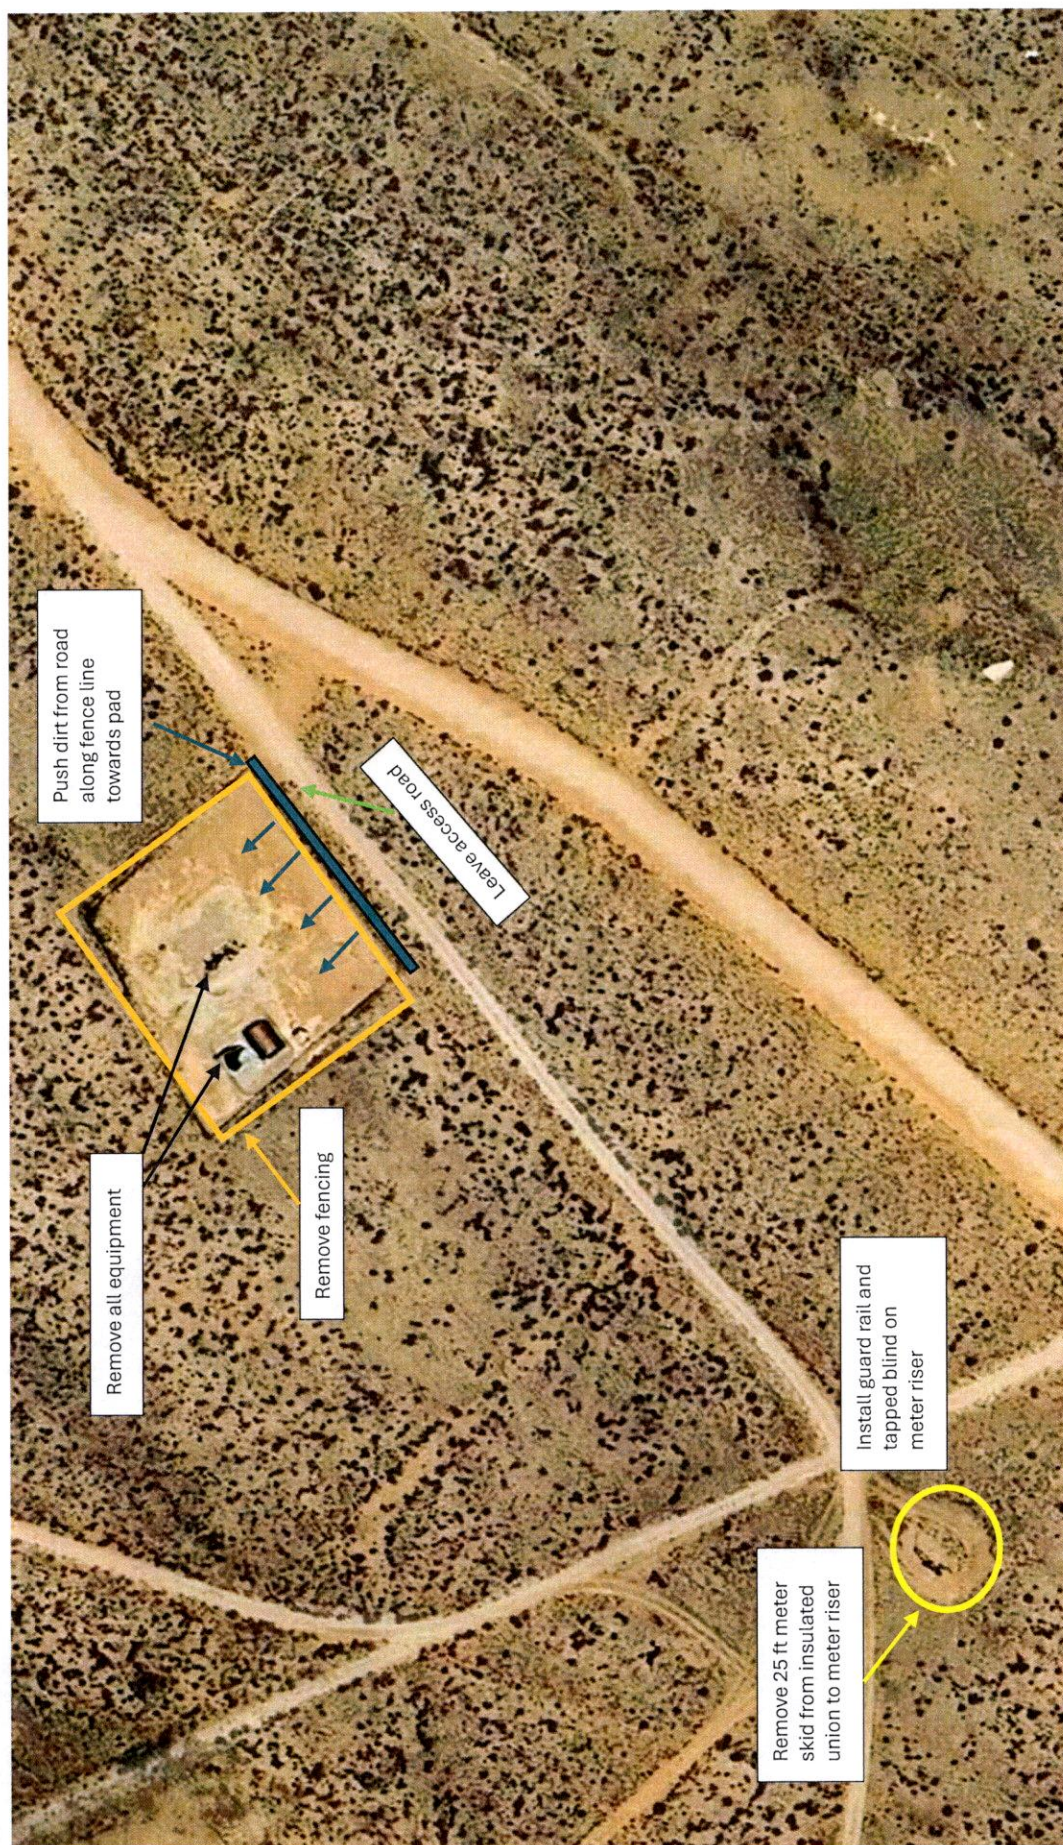

Darcy Ann #001
30-045-29896
Reclamation Map

BLM - FFO - Geologic Report

Date Completed 9/04/2024

Well No.	Darcy Ann 1	Surf. Loc.	1005 FSL	920 FWL
US Well No.	30-045-29896		Sec. 26	T. 26N R. 12W
Lease No.	NO-G-9811-1309			
Agrmt #	NMNM103097	County	San Juan	State New Mexico
Operator	EPIC Energy LLC	Formation	Basin Fruitland Coal/ WAW Fruitland Sand	PC
TVD	1370	PBTD	1346	Elevation KB 6236
Elevation GL	6231			

Geologic Formations	Est. tops	Remarks
Ojo Alamo Ss	210	Aquifer (possible freshwater)
Kirtland Fm	321	
Fruitland Fm	1048	Coal/gas/possible water
Fruitland Perforations	1222	
Pictured Cliffs	1239	
Pictured Cliffs Perforations	1243	

Remarks:

Reference Well:

Complete wellbore fill up proposal. No changes to procedure.

NA

Prepared by: Kenneth Rennick

UNITED STATES DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT
FARMINGTON DISTRICT OFFICE
6251 COLLEGE BLVD.
FARMINGTON, NEW MEXICO 87402

AFMSS 2 Sundry ID 2809681

Attachment to notice of Intention to Abandon

Well: Darcy Ann 1

CONDITIONS OF APPROVAL

1. Plugging operations authorized are subject to the attached "General Requirements for Permanent Abandonment of Wells on Federal and Indian Lease."
2. Farmington Office is to be notified at least 24 hours before the plugging operations commence at (505) 564-7750.

You are also required to place cement excesses per 4.2 and 4.4 of the attached General Requirements.

Office Hours: 7:45 a.m. to 4:30 p.m.

K. Rennick 09/04/2024

**GENERAL REQUIREMENTS FOR
PERMANENT ABANDONMENT OF WELLS ON FEDERAL AND INDIAN LEASES
FARMINGTON FIELD OFFICE**

1.0 The approved plugging plans may contain variances from the following minimum general requirements.

1.1 Modification of the approved plugging procedure is allowed only with the prior approval of the Authorized Officer, Farmington Field Office.

1.2 Requirements may be added to address specific well conditions.

2.0 Materials used must be accurately measured. (densometer/scales)

3.0 A tank or lined pit must be used for containment of any fluids from the wellbore during plugging operations and all pits are to be fenced with woven wire. These pits will be fenced on three sides and once the rig leaves location, the fourth side will be fenced.

3.1 Pits are not to be used for disposal of any hydrocarbons. If hydrocarbons are present in the pit, the fluids must be removed prior to filling in.

4.0 All cement plugs are to be placed through a work string. Cement may be bull-headed down the casing with prior approval. Cement caps on top of bridge plugs or cement retainers may be placed by dump bailer.

4.1 The cement shall be as specified in the approved plugging plan.

4.2 All cement plugs placed inside casing shall have sufficient volume to fill a minimum of 100' of the casing, or annular void(s) between casings, plus an excess volume sufficient to provide for 50 linear feet of fill above the plug.

4.3 Surface plugs may be no less than 50' in length.

4.4 All cement plugs placed to fill annular void(s) between casing and the formation shall be of sufficient volume to fill a minimum of 100' of the annular space plus 100% excess, calculated using the bit size, or 100' of annular capacity, determined from a caliper log, plus an excess volume sufficient to provide for 50 linear feet of fill above the plug.

4.5 All cement plugs placed to fill an open hole shall be of sufficient volume to fill a minimum of 100' of hole, as calculated from a caliper log, plus an excess volume sufficient to provide for 50 linear feet of fill above the plug. In the absence of a caliper log, an excess of 100% shall be required.

4.6 A cement bond log or other accepted cement evaluation tool is required to be run if one had not been previously ran or cement did not circulate to surface during the original casing cementing job or subsequent cementing jobs.

5.0 All cement plugs spotted across, or above, any exposed zone(s), when; the wellbore is not full of fluid or the fluid level will not remain static, and in the case of lost circulation or partial returns during cement placement, shall be tested by tagging with the work string.

- 5.1 The top of any cement plug verified by tagging must be at or above the depth specified in the approved plan, without regard to any excess.
- 5.2 Testing will not be required for any cement plug that is mechanically contained by use of a bridge plug and/or cement retainer, if casing integrity has been established.
- 5.3 Any cement plug which is the only isolating medium, for a fresh water interval or a zone containing a prospectively valuable deposit of minerals, shall be tested by tagging.
- 5.4 If perforations are required below the surface casing shoe, a 30 minute minimum wait time will be required to determine if gas and/or water flows are present. If flow is present, the well will be shut-in for a minimum of one hour and the pressure recorded. Short or long term venting may be necessary to evacuate trapped gas. **If only a water flow occurs with no associated gas, shut well in and record the pressures. Contact the Engineer as it may be necessary to change the cement weight and additives.**

6.0 Before setting any cement plugs the hole needs to be rolled. All wells are to be controlled by means of a fluid that is to be of a weight and consistency necessary to stabilize the wellbore. This fluid shall be left in place as filler between all plugs.

- 6.1 Drilling mud may be used as the wellbore fluid in open hole plugging operations.
- 6.2 The wellbore fluid used in cased holes shall be of sufficient weight to balance known pore pressures in all exposed formations.

7.0 A blowout preventer and related equipment (BOPE) shall be installed and tested prior to working in a wellbore with any exposed zone(s); (1) that are over pressured, (2) where the pressures are unknown, or (3) known to contain H₂S.

8.0 Within 30 days after plugging work is completed, file a Sundry Notice, Subsequent Report of Abandonment (Form 3160-5), through the Automated Fluid Minerals Support System (AFMSS) with the Field Manager, Bureau of Land Management, 6251 College Blvd., Suite A, Farmington, NM 87402. The report should show the manner in which the plugging work was carried out, the extent, by depth(s), of cement plugs placed, and the size and location, by depth(s), of casing left in the well. Show date well was plugged.

9.0 All permanently abandoned wells are to be marked with a permanent monument as specified in 43 CFR 3162.6(d). Unless otherwise approved.

10.0 If this well is located in a Specially Designated Area (SDA), compliance with the appropriate seasonal closure requirements will be necessary.

All of the above are minimum requirements. Failure to comply with the above conditions of approval may result in an assessment for noncompliance and/or a Shut-in Order being issued pursuant to 43 CFR 3163.1. You are further advised that any instructions, orders or decisions issued by the Bureau of Land Management are subject to administrative review pursuant to 43 CFR 3165.3 and appeal pursuant to 43 CFR 3165.4 and 43 CFR 4.700.

State of New Mexico
Energy, Minerals and Natural Resources Department
Oil Conservation Division
Standard Plugging Conditions



This document provides OCD's general plugging conditions of approval. It should be noted that the list below may not cover special plugging programs in unique and unusual cases, and OCD expressly reserves the right to impose additional requirements to the extent dictated by project conditions. The OCD also reserves the right to approve deviations from the below conditions if field conditions warrant a change. A C-103F NOI to P&A must be approved prior to plugging operations. Failure to comply with the conditions attached to a plugging approval may result in a violation of 19.15.5.11 NMAC, which may result in enforcement actions, including but not limited to penalties and a requirement that the well be re-plugged as necessary.

1. Notify OCD office at least 24 hours before beginning work and seek prior approval to implementing any changes to the C-103 NOI to PA.
 - North Contact, Monica Kuehling, 505-320-0243, monica.kuehling@emnrd.nm.gov
 - South Contact, Gilbert Cordero, 575-626-0830, gilbert.cordero@emnrd.nm.gov
2. A Cement Bond Log is required to ensure strata isolation of producing formations, protection of water and correlative rights. A CBL must be run or be on file that can be used to properly evaluate the cement behind the casing.

Note: Logs must be submitted to OCD via OCD permitting. A copy of the log may be emailed to OCD inspector for faster review times, but emailing does not relieve the operators obligation to submit through OCD permitting.

3. Once Plugging operations have commenced, the rig must not rig down until the well is fully plugged without OCD approval. If gap in plugging operations exceeds 30 days, the Operator must file a subsequent sundry of work performed and revised NOI for approval on work remaining. At no time shall the rig be removed from location if it will result in waste or contamination of fresh water.
4. Insure all bradenheads have been exposed, identified and valves are operational prior to rig up.
5. Fluids must be placed between all cement plugs mixed at 25 sacks per 100 bbls of water.
 - North, water or mud laden fluids
 - South, mud laden fluids
6. Closed loop system is to be used for entire plugging operation. Upon completion, contents of steel pits are to be hauled to an OCD permitted disposal facility.
7. Class of cement shall be used in accordance with the below table for depth allowed.

Class	TVD Lower Limit (feet)
Class A/B	6,000
Class I/II	6,000
Class C or III	6,000
Class G and H	8,000
Class D	10,000

Class E	14,000
Class F	16,000

8. After cutting the well head any "top off cement jobs" must remain static for 30 minutes. Any gas bubbles or flow during this 30 minutes shall be reported to the OCD for approval of next steps.
9. Trucking companies being used to haul oilfield waste fluids (Commercial or Private) to a disposal facility shall have an approved OCD C-133 permit.
 - A copy of this permit shall be available in each truck used to haul waste products.
 - It is the responsibility of the Operator and Contractor to verify that this permit is in place prior to performing work.
 - Drivers shall be able to produce a copy upon request of an OCD Compliance Officer.
10. Filing a [C-103] Sub. Plugging (C-103P) will serve as notification that the well has been plugged.
11. A [C-103] Sub. Release After P&A (C-103Q) shall be filed no later than a year after plugging and a site inspection by OCD Compliance officer to determine if the location is satisfactorily cleaned, all equipment, electric poles and trash has been removed to meet OCD standards before bonding can be released.
12. Produced water or brine-based fluids **may not** be used during any part of plugging operations without **prior OCD approval**.
13. Cementing;
 - All cement plugs will be neat cement and a minimum of 100' in length. 50' of calculated cement excess required for inside casing plugs and 100% calculated cement excess required on outside casing plugs.
 - If cement does not exist between or behind the casing strings at recommended formation depths, the casing perforations will be shot at 50' below the formation top and the cement retainer shall be set no more than 50' from the perforations.
 - WOC (Wait on Cement) time will be:
 - 4 hours for accelerated (calcium chloride) cement.
 - 6 hours on regular cement.
 - Operator must tag all cement plugs unless it meets the below condition.
 - The operator has a passing pressure test for the casing annulus and the plug is only an inside plug.
 - If perforations are made operator must tag all plugs using the work string to tag unless given approval to tag with wireline by the correct contact from COA #1 of this document.
 - This includes plugs pumped underneath a cement retainer to ensure retainer seats properly after cement is pumped.
 - Cement can only be bull-headed with specific prior approval.
 - Squeeze pressures are not to exceed the exposed formations frac gradient or the burst pressure of the casing.
14. A cement plug is required to be set from 50' below to 50' above (straddling) formation tops, casing shoes, casing stubs, any attempted casing cut offs, anywhere the casing is perforated, DV tools.
 - Perforation/Formation top plug. (When there is less than 100ft between the top perforation to the formation top.) These plugs are required to be started no greater than

50ft from the top perforation. However, the plug should be set below the formation top or as close to the formation top as possible for the maximum isolation between the formations. The plug is required to be a 100ft cement plug plus excess.

- Perforation Plug when a formation top is not included. These plugs are required to be started within 50ft of the top perforation. The plug is required to be a 100ft cement plug plus excess.
- Cement caps on top of bridge plugs or cement retainers for perforation plugs, that are not straddling a formation top, may be set using a bailer with a minimum of 35' of cement in lieu of the 100' plug. The bridge plug or retainer must be set within 50ft of the perforations.
- Perforations are required below the surface casing shoe if cement does not exist behind the casing, a 30-minute minimum wait time will be required immediately after perforating to determine if gas and/or water flows are present. If flow is present, the well will be shut-in for a minimum of one hour and the pressure recorded. If gas is detected contact the OCD office for directions.

15. No more than 3000 feet is allowed between cement plugs in cased hole and no more than 2000 feet is allowed in open hole.

16. Formation Tops to be isolated with cement plugs, but not limited to are:

- Northwest See Figure A
- South (Artesia) See Figure B
- Potash See Figure C
 - In the R-111-P (Or as subsequently revised) Area a solid cement plug must be set across the salt section. Fluid used to mix the cement shall be saturated with the salts that are common to the section penetrated and in suitable proportions, not more than 3% calcium chloride (by weight of cement) will be considered the desired mixture whenever possible, woe 4 hours and tag, this plug will be 50' below the bottom and 50' above the top of the Formation.
- South (Hobbs) See Figure D1 and D2
- Areas not provided above will need to be reviewed with the OCD on a case by case basis.

17. Markers

- Dry hole marker requirements 19.15.25.10.
The operator shall mark the exact location of plugged and abandoned wells with a steel marker not less than four inches in diameter set in cement and extending at least four feet above mean ground level. The marker must include the below information:
 1. Operator name
 2. Lease name and well number
 3. API number
 4. Unit letter
 5. Section, Township and Range
- AGRICULTURE (Below grade markers)
In Agricultural areas a request can be made for a below ground marker. For a below ground marker the operator must file their request on a C-103 notice of intent, and it must include the following;
 - A) Aerial photo showing the agricultural area
 - B) Request from the landowner for the below ground marker.

C) Subsequent plugging report for a well using a below ground marker must have an updated C-102 signed by a certified surveyor for SHL.

Note: A below ground marker is required with all pertinent information mentioned above on a plate, set 3' below ground level, a picture of the plate will be supplied to OCD for record, the exact location of the marker (longitude and latitude by GPS) will be provided to OCD. OCD requires a current survey to verify the location of the below ground marker, however OCD will accept a GPS coordinate that were taken with a GPS that has an accuracy of within 15 feet.

18. If work has not commenced within 1 year of the approval of this procedure, the approval is automatically expired. After 1 year a new [C-103] NOI Plugging (C-103F) must be submitted and approved prior to work.

Figure A

North Formations to be isolated with cement plugs are:

- San Jose
- Nacimiento
- Ojo Alamo
- Kirtland
- Fruitland
- Picture Cliffs
- Chacra (if below the Chacra Line)
- Mesa Verde Group
- Mancos
- Gallup
- Basin Dakota (plugged at the top of the Graneros)
- Deeper formations will be reviewed on a case-by-case basis

Figure B

South (Artesia) Formations to be isolated with cement plugs are:

- Fusselman
- Montoya
- Devonian
- Morrow
- Strawn
- Atoka
- Permo-Penn
- Wolfcamp
- Bone Springs
- Delaware , in certain areas where the Delaware is subdivided into;
 - 1. Bell Canyon
 - 2. Cherry Canyon
 - 3. Brushy Canyon
- Any salt sections
- Abo
- Yeso
- Glorieta
- San Andres
- Greyburg
- Queen
- Yates

Figure C

Potash Area R-111-P

T 18S – R 30E

Sec 10 Unit P. Sec 11 Unit M,N. Sec 13 Unit L,M,N. Sec 14 Unit C -P. Sec 15 Unit A G,H,I,J,K,N,O,P. Sec 22 Unit All
except for M. Sec 23, Sec 24 Unit C,D,E,L, Sec 26 Unit A-G, Sec 27 Unit A,B,C

T 19S – R 29E

Sec 11 Unit P. Sec 12 Unit H-P. Sec 13. Sec 14 Unit A,B,F-P. Sec 15 Unit P. Sec 22 Unit A,B,C,F,G,H,I,J K,N,O,P. Sec 23.
Sec 24. Sec 25 Unit D. Sec 26 Unit A- F. Sec 27 Unit A,B,C,F,G,H.

T 19S – R 30E

Sec 2 Unit K,L,M,N. Sec 3 Unit I,L,M,N,O,P. Sec 4 Unit C,D,E,F,G,I-P. Sec 5 Unit A,B,C,E-P. Sec 6 Unit I,O,P. Sec 7 – Sec
10. Sec 11 Unit D, G—P. Sec 12 Unit A,B,E-P. Sec 13 Unit A-O. Sec 14-Sec 18. Sec 19 Unit A-L, P. Sec 20 – Sec 23. Sec
24 Unit C,D,E,F,L,M,N. Sec 25 Unit D. Sec 26 Unit A-G, I-P. Sec 27, Sec 28, Sec 29 Unit A,B,C,D,F,G,H,I,J,O,P. Sec 32
Unit A,B,G,H,I,J,N,O,P. Sec 33. Sec 34. Sec 35. Sec 36 Unit D,E,F,I-P.

T 19S – R 31E

Sec 7 Unit C,D,E,F,L. Sec 18 Unit C,D,E,F,G,K,L. Sec 31 Unit M. Sec 34 Unit P. Sec 35 Unit M,N,O. Sec 36 Unit O,P.

T 20S – R 29E

Sec 1 Unit H,I,P. Sec 13 Unit E,L,M,N. Sec 14 Unit B-P. Sec 15 Unit A,H,I,J,N,O,P. Sec 22 Unit A,B,C,F,G,H,I,J,O,P. Sec
23. Sec 24 Unit C,D,E,F,G,J-P. Sec 25 Unit A-O. Sec 26. Sec 27 Unit A,B,G,H,I,J,O,P. Sec 34 Unit A,B,G,H. Sec 35 Unit
A-H. Sec 36 Unit B-G.

T 20S – R 30E

Sec 1 – Sec 4. Sec 5 Unit A,B,C,E-P. Sec 6 Unit E,G-P. Sec 7 Unit A-H,I,J,O,P. Sec 8 – 17. Sec 18 Unit A,B,G,H,I,J,O,P.
Sec 19 Unit A,B,G,H,I,J,O,P. Sec 20 – 29. Sec 30 Unit A-L,N,O,P. Sec 31 Unit A,B,G,H,I,P. Sec 32 – Sec 36.

T 20S – R 31E

Sec 1 Unit A,B,C,E-P. Sec 2. Sec 3 Unit A,B,G,H,I,J,O,P. Sec 6 Unit D,E,F,J-P. Sec 7. Sec 8 Unit E-P. Sec 9 Unit E,F,J-P.
Sec 10 Unit A,B,G-P. Sec 11 – Sec 36.

T 21S – R 29E

Sec 1 – Sec 3. Sec 4 Unit L1 – L16,I,J,K,O,P. Sec 5 Unit L1. Sec 10 Unit A,B,H,P. Sec 11 – Sec 14. Sec 15 Unit A,H,I. Sec
23 Unit A,B. Sec 24 Unit A,B,C,D,F,G,H,I,J,O,P. Sec 25 Unit A,O,P. Sec 35 Unit G,H,I,J,K,N,O,P. Sec 36 A,B,C,F – P.

T 21S – R 30E

Sec 1 – Sec 36

T 21S – R 31E

Sec 1 – Sec 36

T 22S – R 28E

Sec 36 Unit A,H,I,P.

T 22S – R 29E

Sec 1. Sec2. Sec 3 Unit I,J,N,O,P. Sec 9 Unit G – P. Sec 10 – Sec 16. Sec 19 Unit H,I,J. Sec 20 – Sec 28. Sec 29 Unit

A,B,C,D,G,H,I,J,O,P. Sec 30 Unit A. Section 31 Unit C – P. Sec 32 – Sec 36

T 22S – R 30E

Sec 1 – Sec 36

T 22S – R 31E

Sec 1 – Sec 11. Sec 12 Unit B,C,D,E,F,L. Sec 13 Unit E,F,K,L,M,N. Sec 14 – Sec 23. Sec 24 Unit

C,D,E,F,K,L,M,N. Sec 25

Unit A,B,C,D. Sec 26 Unit A,BC,D,G,H. Sec 27 – Sec 34.

T 23S – R 28E

Sec 1 Unit A

T 23S – R 29E

Sec 1 – Sec 5. Sec 6 Unit A – I, N,O,P. Sec 7 Unit A,B,C,G,H,I,P. Sec 8 Unit A – L, N,O,P. Sec 9 – Sec 16. Sec 17 Unit

A,B,G,H,I,P. Sec 21 – Sec 23. Sec 24 Unit A – N. Sec 25 Unit D,E,L. Sec 26. Sec 27. Sec 28 Unit A – J, N,O,P. Sec 33

Unit A,B,C. Sec 34 Unit A,B,C,D,F,G,H. Sec 35. Sec 36 Unit B,C,D,E,F,G,K,L.

T 23S – R 30E

Sec 1 – Sec 18. Sec 19 Unit A – I,N,O,P. Sec 20, Sec 21. Sec 22 Unit A – N, P. Sec 23, Sec 24, Sec 25. Sec 26 Unit

A,B,F-P. Sec 27 Unit C,D,E,I,N,O,P. Sec 28 Unit A – H, K,L,M,N. Sec 29 Unit A – J, O,P. Sec 30 Unit A,B. Sec 32 A,B. Sec

33 Unit C,D,H,I,O,P. Sec 34, Sec 35, Sec 36.

T 23S – R 31E

Sec 2 Unit D,E,J,O. Sec 3 – Sec 7. Sec 8 Unit A – G, K – N. Sec 9 Unit A,B,C,D. Sec 10 Unit D,P. Sec 11 Unit G,H,I,J,M,N,O,P. Sec 12 Unit E,L,K,M,N. Sec 13 Unit C,D,E,F,G,J,K,L,M,N,O. Sec 14. Sec 15 Unit A,B,E – P.

Sec 16 Unit

I, K – P. Sec 17 Unit B,C,D,E, I – P. Sec 18 – Sec 23. Sec 24 Unit B – G, K,L,M,N. Sec 25 Unit B – G, J,K,L. Sec 26 – Sec

34. Sec 35 Unit C,D,E.

T 24S – R 29E

Sec 2 Unit A, B, C, D. Sec 3 Unit A

T 24S – R 30E

Sec 1 Unit A – H, J – N. Sec 2, Sec 3. Sec 4 Unit A,B,F – K, M,N,O,P. Sec 9 Unit A – L. Sec 10 Unit A – L, O,P. Sec 11.

Sec 12 Unit D,E,L. Sec 14 Unit B – G. Sec 15 Unit A,B,G,H.

T 24S – R 31E

Sec 3 Unit B – G, J – O. Sec 4. Sec 5 Unit A – L, P. Sec 6 Unit A – L. Sec 9 Unit A – J, O, P. Sec 10 Unit B – G, K – N. Sec

35 Unit E – P. Sec 36 Unit E, K, L, M, N.

T 25S – R 31E

Sec 1 Unit C, D, E, F. Sec 2 Unit A – H.

Figure D1 and D2

South (Hobbs) Formations to be isolated with cement plugs are:

The plugging requirements in the Hobbs Area are based on the well location within specific areas of the Area (See Figure D1). The Formations in the Hobbs Area to be isolated with cement plugs are (see Figure D2)

Figure D1 Map

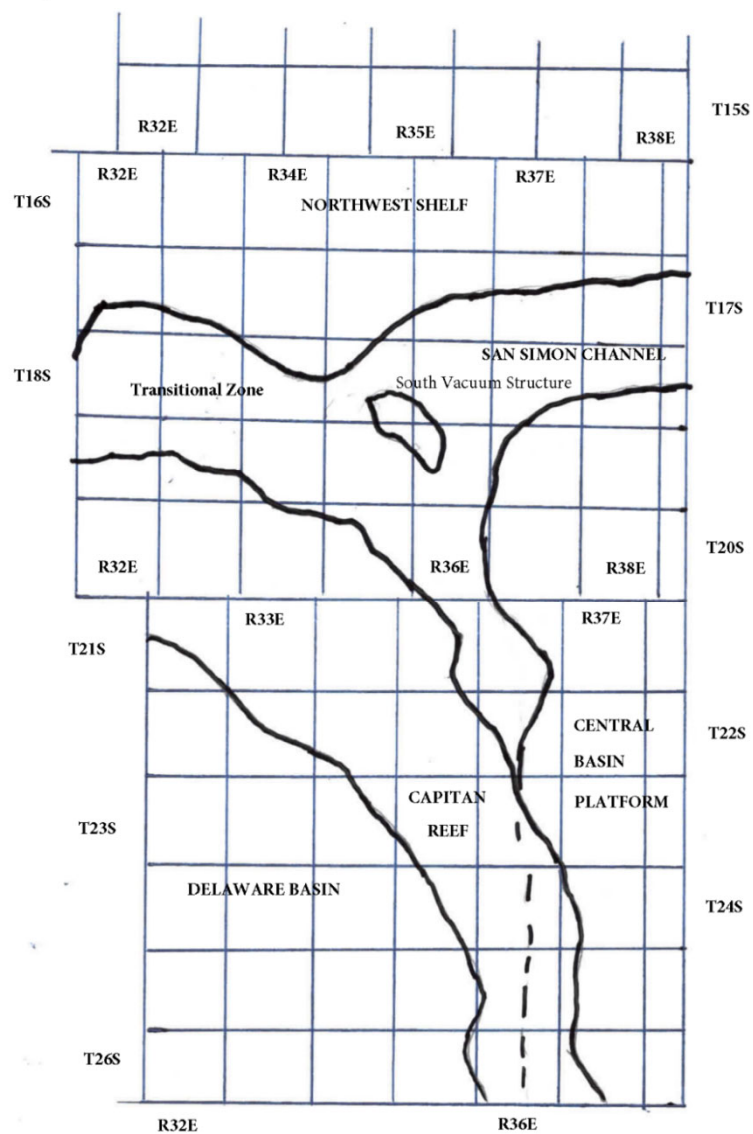


Figure D2 Formation Table

100' Plug to isolate upper and lower fresh water zones (typically 250' to 350')						
Northwest Shelf	Captan Reef Area	Transition Zone	San Simon Channel	South Vacuum Structure	Delaware Basin	Central Basin Platform
Granit Wash (Detrital basement material and fractured pre-Cambrian basement rock)	Siluro-Devonian	Morrow	Siluro-Devonian	Ellenburger	Siluro-Devonian	Granit Wash (Detrital basement material, fractured pre-Cambrian basement rock and fracture Mafic Volcanic intrusives).
Montoya	Mississippian	Atoka	Morrow	McKee	Morrow	Ellenburger
Fusselman	Morrow	Strawn	Wolfcamp	Siluro-Devonian	Atoka	Connell
Woodford	Atoka	Cisco	Abo Reef	Woodford	Strawn	Waddell
Siluro-Devonian	Strawn	Pennsylvanian	Bone Spring	Mississippian	Pennsylvanian	McKee
Chester	Pennsylvanian	Wolfcamp	Delaware	Barnett Shale	Lower Wolfcamp	Simpson Group
Austin	Wolfcamp	Bone Spring	San Andres	Morrow	Upper Wolfcamp	Montoya
Mississippian	Abo Reef, if present	Delaware	Queen	Atoka	Wolfcamp	Fusselman
Morrow	Abo, if present	San Andres	Yates	Strawn	Third Bone Spring Sand (Top of Wolfbone)	Silurian
Atoka	Queen, if present	Grayburg-San Andres	Base of Salt	Canyon	First Bone Spring Sand (Top of Lower Bone Spring)	Devonian
Lower Pennsylvanian	Bone Spring	Queen	Rustler	Pennsylvanian	Bone Spring	Strawn
Cisco-Canyon	Delaware	Seven Rivers		Blinbry	Brushy Canyon	Pennsylvanian
Pennsylvanian	Base Capitan Reef	Yates		Bone Spring	Delaware (Base of Salt)	Wolfcamp
Bough	Seven Rivers	Base of Salt		San Andres	Rustler	Abo
Wolfcamp	Yates	Rustler		Queen		Abo Reef
Abo	Top Capitan Reef			Base of Salt		Drinkard
Abo Reef, if present	Base of Salt			Rustler		Tubb
Yeso (Township 15 South to Township 17 South)	Rustler					Blinbry
Drinkard or Lower Yeso (Township 15 South to Township 17 South)						Paddock
Tubb (Township 15 South to Township 17 South)						Glorieta
Blinbry (Township 15 South to Township 17 South)						San Andres
Paddock (Township 15 South to Township 17 South)						Grayburg
Glorieta						Grayburg-San Andres
San Andres						Queen
Queen (Township 15 South to Township 17 South)						Seven Rivers
Seven Rivers (Township 15 South to Township 17 South)						Yates
Yates (Township 15 South to Township 17 South)						Base of Salt
Base of Salt						Rustler
Rustler						

District I
1625 N. French Dr., Hobbs, NM 88240
Phone:(575) 393-6161 Fax:(575) 393-0720
District II
811 S. First St., Artesia, NM 88210
Phone:(575) 748-1283 Fax:(575) 748-9720
District III
1000 Rio Brazos Rd., Aztec, NM 87410
Phone:(505) 334-6178 Fax:(505) 334-6170
District IV
1220 S. St Francis Dr., Santa Fe, NM 87505
Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

CONDITIONS

Action 380354

CONDITIONS

Operator: EPIC ENERGY, L.L.C. 332 Road 3100 Aztec, NM 87410	OGRID: 372834
	Action Number: 380354
	Action Type: [C-103] NOI Plug & Abandon (C-103F)

CONDITIONS

Created By	Condition	Condition Date
mkuehling	CBL required - Notify NMOCD 24 hours prior to moving on - Extend pc plug to 1289 -Monitor string pressures daily report on subsequent - submit all logs prior to subsequent	9/5/2024