

Well Name: BUDDHA TEMPLE COM	Well Location: T24N / R8W / SEC 30 / NENE / 36.290344 / -107.716049	County or Parish/State: SAN JUAN / NM
Well Number: 90	Type of Well: CONVENTIONAL GAS WELL	Allottee or Tribe Name:
Lease Number: NMNM54980	Unit or CA Name: BUDDHA TEMPLE	Unit or CA Number: NMNM94042
US Well Number: 300452923900S1	Operator: DUGAN PRODUCTION CORPORATION	

Notice of Intent

Sundry ID: 2877339

Type of Submission: Notice of Intent	Type of Action: Plug and Abandonment
Date Sundry Submitted: 10/06/2025	Time Sundry Submitted: 03:40
Date proposed operation will begin: 10/17/2025	

Procedure Description: Dugan Production plans to plug and abandon the well per the attached procedure.

Surface Disturbance

Is any additional surface disturbance proposed?: No

NOI Attachments

Procedure Description

- Buddha_Temple_Com_90_Rec_Plan_9_30_25_20251006153951.pdf
- Buddha_Temple_Com_90_proposed_PA_formation_tops_20251006153810.pdf
- Buddha_Temple_Com_90_proposed_PA_planned_wellbore_schematic_20251006153802.pdf
- Buddha_Temple_Com_90_proposed_PA_current_wellbore_schematic_20251006153755.pdf
- Buddha_Temple_Com_90_proposed_PA_planned_work_20251006153749.pdf

Well Name: BUDDHA TEMPLE COM	Well Location: T24N / R8W / SEC 30 / NENE / 36.290344 / -107.716049	County or Parish/State: SAN JUAN / NM
Well Number: 90	Type of Well: CONVENTIONAL GAS WELL	Allottee or Tribe Name:
Lease Number: NMNM54980	Unit or CA Name: BUDDHA TEMPLE	Unit or CA Number: NMNM94042
US Well Number: 300452923900S1	Operator: DUGAN PRODUCTION CORPORATION	

Conditions of Approval

Specialist Review

General_Requirement_PxA_20251010150755.pdf
Buddha_Temple_Com_90_KR_20251010150745.pdf
2877339_90_3004529239_NOIA_KR_10102025_20251010150721.pdf

Operator

I certify that the foregoing is true and correct. Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction. Electronic submission of Sundry Notices through this system satisfies regulations requiring a

Operator Electronic Signature: TYRA FEIL	Signed on: OCT 06, 2025 03:40 PM
Name: DUGAN PRODUCTION CORPORATION	
Title: Authorized Representative	
Street Address: PO BOX 420	
City: FARMINGTON	State: NM
Phone: (505) 325-1821	
Email address: TYRAFEIL@DUGANPRODUCTION.COM	

Field

Representative Name: Aliph Reena		
Street Address: PO Box 420		
City: Farmington	State: NM	Zip: 87499-0420
Phone: (505)360-9192		
Email address: Aliph.Reena@duganproduction.com		

BLM Point of Contact

BLM POC Name: KENNETH G RENNICK	BLM POC Title: Petroleum Engineer
BLM POC Phone: 5055647742	BLM POC Email Address: krennick@blm.gov
Disposition: Approved	Disposition Date: 10/10/2025
Signature: Kenneth Rennick	

Dugan Production plans to plug and abandon the well according to the following procedure:

- Run 4½" casing scraper to 1570'. RIH & set 4½" cement retainer to 1564'. Fruitland perforations @ 1614'-1625'. Load and circulate hole.
- Attempt to pressure test casing to 600 psi for 30 mins.
- Run CBL from 1570' to surface.
- **Plug I, Pictured Cliffs-Fruitland-Kirtland-Ojo Alamo:** Sting in the cement retainer. Squeeze 20 sks, 23 cu ft Class G neat cement to cover the Pictured Cliffs below the retainer till the top perforation at 1614'. Sting out. Spot inside 4½" casing above cement retainer @ 1570' to 803' w/60 sks (69 cu ft) Class G neat cement to cover the Pictured Cliffs, Fruitland, Kirtland, Ojo Alamo tops (5 gal/sk, 15.8 #/gal, 1.15 cu ft/sk). Total 80 sks, 92 cu ft. Tag and verify. **Plug I, Inside 4½" casing, cement retainer at 1570', 80 sks, 92 cu ft, Pictured Cliffs-Fruitland-Kirtland-Ojo Alamo, 803'-1570'.**
- **Plug II, surface casing shoe-Surface:** Spot Plug II inside 4½" casing from 170' to surface w/15 sks, 17.25 cu ft Class G neat cement to cover from 170' to surface. **Plug II, Inside 4½" casing, 15 sks, 17.25 cu ft, Surface Casing shoe to surface, 0-170'.**
- Cut wellhead off. Fill casing with cement in case needed. Install dry hole marker.
- Clean location. Rig down and move.

Current Wellbore Schematic

Buddha Temple Com # 90


30-045-29239

Basin Fruitland Coal

790' FNL & 790' FEL

A-30-T24N-R08W

San Juan County, NM

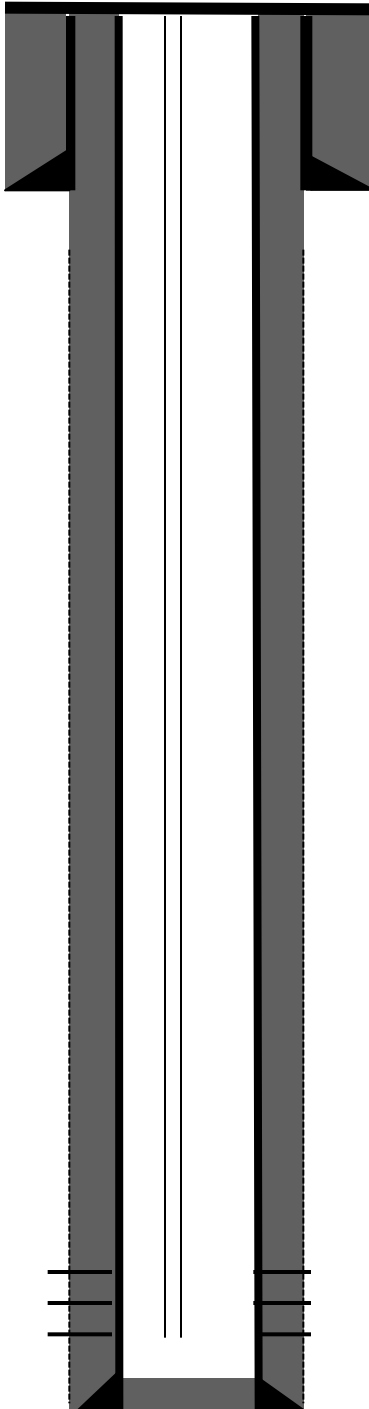

7" 23#, J-55 casing @ 120': Hole size -9-1/8"

Cemented with 80 sks, Class B cement. Circulate cement

2-3/8" J-55 tubing ran to 1633'

4 1/2" 10.5#, J-55 casing @ 1744'. Hole size: 6-1/4"

Cement w/ 120 sks Lodense and 60 sks Class B cement. 317 Cu.ft
Circ 4 bbls cement

Fruitland Coal Perforated @ 1614' – 1625' w/4 spf

PBTD @ 1646', TD 1750'

Planned P & A Wellbore Schematic

Buddha Temple Com # 90


30-045-29239

Basin Fruitland Coal

790' FNL & 790' FEL

A-30-T24N-R08W

San Juan County, NM

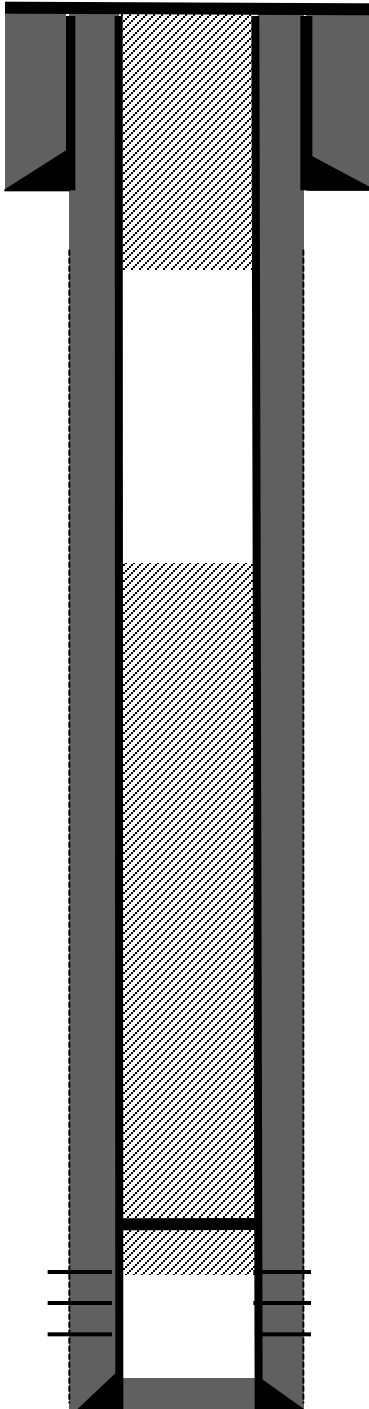

7" 23#, J-55 casing @ 120': Hole size -9-1/8"

Cemented with 80 sks, Class B cement. Circulate cement

Plug II, Inside 4 1/2" casing, 15 sks, 17.25 Cu.ft, Surface Casing shoe to surface, 0-170'

Set 4 1/2" CR @ 1570'. Squeeze 20 sks, 23 Cu.ft cement to cover the Pictured cliffs top below the retainer.

Plug I, Inside 4 1/2" casing, Cement Retainer at 1570', 80 sks, 92 Cu.ft, Pictured Cliffs-Fruitland-Kirtland-Ojo Alamo, 803'-1570'.

4 1/2" 10.5#, J-55 casing @ 1744'. Hole size: 6-1/4"

Cement w/ 120 sks Lodense and 60 sks Class B cement. 317 Cu.ft
Circ 4 bbls cement

Fruitland Coal Perforated @ 1614' – 1625' w/4 spf

PBTD @ 1646', TD 1750'

Buddha Temple Com # 90

30-045-29239

Basin Fruitland Coal

790' FNL & 790' FEL

A-30-T24N-R08W

San Juan County, NM

Formation Tops

- Surface Casing – 120'
- Ojo Alamo – 903'
- Kirtland – 1026'
- Fruitland – 1294'
- Perforations – 1614'-1625'
- Pictured Cliffs – 1633'



United States Department of the Interior

BUREAU OF LAND MANAGEMENT
Farmington District Office
6251 College Boulevard, Suite A
Farmington, New Mexico 87402
<http://www.blm.gov/nm>



CONDITIONS OF APPROVAL

October 10, 2025

Notice of Intent – Plug and Abandonment

Operator: Dugan Production Corporation
Lease: NMNM 054980
Agreement: NMNM 094042
Well(s): Budda Temple Com 90, US Well # 30-045-29239
Location: NENE Sec 30 T24N R8W (San Juan, NM)
Sundry Notice ID #: 2877339

The Notice of Intent to Plug and Abandon is accepted with the following Conditions of Approval (COA):

1. Plugging operations authorized are subject to the attached "General Requirements for Permanent Abandonment of Wells on Federal and Indian Lease."
2. The following modifications to your plugging program are to be made:
 - a. No changes to the procedure.
3. **Notification:** Farmington Office is to be notified at least 24 hours before the plugging operations commence at (505) 564 7750.

You are also required to place cement excesses per 4.2 and 4.4 of the attached General Requirements.

K. Rennick 10/10/2025

**GENERAL REQUIREMENTS FOR
PERMANENT ABANDONMENT OF WELLS ON FEDERAL AND INDIAN LEASES
FARMINGTON FIELD OFFICE**

- 1.0 The approved plugging plans may contain variances from the following minimum general requirements.
- 1.1 Modification of the approved plugging procedure is allowed only with the prior approval of the Authorized Officer, Farmington Field Office.
 - 1.2 Requirements may be added to address specific well conditions.
- 2.0 Materials used must be accurately measured. (densometer/scales)
- 3.0 A tank or lined pit must be used for containment of any fluids from the wellbore during plugging operations and all pits are to be fenced with woven wire. These pits will be fenced on three sides and once the rig leaves location, the fourth side will be fenced.
- 3.1 Pits are not to be used for disposal of any hydrocarbons. If hydrocarbons are present in the pit, the fluids must be removed prior to filling in.
- 4.0 All cement plugs are to be placed through a work string. Cement may be bull-headed down the casing with prior approval. Cement caps on top of bridge plugs or cement retainers may be placed by dump bailer.
- 4.1 The cement shall be as specified in the approved plugging plan.
 - 4.2 All cement plugs placed inside casing shall have sufficient volume to fill a minimum of 100' of the casing, or annular void(s) between casings, plus an excess volume sufficient to provide for 50 linear feet of fill above the plug.
 - 4.3 Surface plugs may be no less than 50' in length.
 - 4.4 All cement plugs placed to fill annular void(s) between casing and the formation shall be of sufficient volume to fill a minimum of 100' of the annular space plus 100% excess, calculated using the bit size, or 100' of annular capacity, determined from a caliper log, plus an excess volume sufficient to provide for 50 linear feet of fill above the plug.
 - 4.5 All cement plugs placed to fill an open hole shall be of sufficient volume to fill a minimum of 100' of hole, as calculated from a caliper log, plus an excess volume sufficient to provide for 50 linear feet of fill above the plug. In the absence of a caliper log, an excess of 100% shall be required.
 - 4.6 **A cement bond log or other accepted cement evaluation tool is required to be run if one had not been previously ran or cement did not circulate to surface during the original casing cementing job or subsequent cementing jobs.**

5.0 All cement plugs spotted across, or above, any exposed zone(s), when; the wellbore is not full of fluid or the fluid level will not remain static, and in the case of lost circulation or partial returns during cement placement, shall be tested by tagging with the work string.

- 5.1 The top of any cement plug verified by tagging must be at or above the depth specified in the approved plan, without regard to any excess.
- 5.2 Testing will not be required for any cement plug that is mechanically contained by use of a bridge plug and/or cement retainer, if casing integrity has been established.
- 5.3 Any cement plug which is the only isolating medium, for a fresh water interval or a zone containing a prospectively valuable deposit of minerals, shall be tested by tagging.
- 5.4 If perforations are required below the surface casing shoe, a 30 minute minimum wait time will be required to determine if gas and/or water flows are present. If flow is present, the well will be shut-in for a minimum of one hour and the pressure recorded. Short or long term venting may be necessary to evacuate trapped gas. **If only a water flow occurs with no associated gas, shut well in and record the pressures. Contact the Engineer as it may be necessary to change the cement weight and additives.**

6.0 Before setting any cement plugs the hole needs to be rolled. All wells are to be controlled by means of a fluid that is to be of a weight and consistency necessary to stabilize the wellbore. This fluid shall be left in place as filler between all plugs.

- 6.1 Drilling mud may be used as the wellbore fluid in open hole plugging operations.
- 6.2 The wellbore fluid used in cased holes shall be of sufficient weight to balance known pore pressures in all exposed formations.

7.0 A blowout preventer and related equipment (BOPE) shall be installed and tested prior to working in a wellbore with any exposed zone(s); (1) that are over pressured, (2) where the pressures are unknown, or (3) known to contain H₂S.

8.0 Within 30 days after plugging work is completed, file a Sundry Notice, Subsequent Report of Abandonment (Form 3160-5), through the Automated Fluid Minerals Support System (AFMSS) with the Field Manager, Bureau of Land Management, 6251 College Blvd., Suite A, Farmington, NM 87402. The report should show the manner in which the plugging work was carried out, the extent, by depth(s), of cement plugs placed, and the size and location, by depth(s), of casing left in the well. Show date well was plugged.

9.0 All permanently abandoned wells are to be marked with a permanent monument as specified in 43 CFR 3162.6(d). Unless otherwise approved.

10.0 If this well is located in a Specially Designated Area (SDA), compliance with the appropriate seasonal closure requirements will be necessary.

All of the above are minimum requirements. Failure to comply with the above conditions of approval may result in an assessment for noncompliance and/or a Shut-in Order being issued pursuant to 43 CFR 3163.1. You are further advised that any instructions, orders or decisions issued by the Bureau of Land Management are subject to administrative review pursuant to 43 CFR 3165.3 and appeal pursuant to 43 CFR 3165.4 and 43 CFR 4.700.

BLM - FFO - Geologic Report**Date Completed** 10/10/2025

Well No.	Buddha Temple Com 90	Surf. Loc.	790 FNL	790 FEL
US Well No.	30-045-29239	NENE	Section 30	T. 24N R. 8W
Lease No.				
Operator	Dugan Production Corporation	County	San Juan	State New Mexico
TVD	1750 PBDT 1646	Formation	Basin Fruitland Coal	
Elevation GL	6743	Elevation KB	NA	

Geologic Formations	Est. tops	Remarks
Surface Casing	120	
Ojo Alamo	903	Fresh water aquifer
Kirtland Fm	1026	
Fruitland Fm	1294	
Top Perforation	1614	
Bottom Perforation	1625	
Pictured Cliffs	1633	

Remarks:

Limited raster log data. Operator selected formation tops are appropriate for the area.
No changes to the procedure.

Reference Well:

NA

Prepared by: Kenneth Rennick

Sante Fe Main Office
Phone: (505) 476-3441

General Information
Phone: (505) 629-6116

Online Phone Directory
<https://www.emnrd.nm.gov/ocd/contact-us>

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

CONDITIONS

Action 515127

CONDITIONS

Operator: DUGAN PRODUCTION CORP PO Box 420 Farmington, NM 87499	OGRID: 6515
	Action Number: 515127
	Action Type: [C-103] NOI Plug & Abandon (C-103F)

CONDITIONS

Created By	Condition	Condition Date
loren.diede	Notify the OCD inspection supervisor via email 24 hours prior to beginning Plug & Abandon (P&A) operations.	10/14/2025
loren.diede	Submit photo and GPS coordinates of the P&A marker with the final P&A reports. The API# on the marker must be clearly legible.	10/14/2025