



BRUCE KING
GOVERNOR

STATE OF NEW MEXICO
ENERGY, MINERALS AND NATURAL RESOURCES DEPARTMENT
OIL CONSERVATION DIVISION

2040 S. PACHECO
SANTA FE, NEW MEXICO 87505
(505) 827-7131

ADMINISTRATIVE ORDER NO. WFX-665

APPLICATION OF DEVON ENERGY CORPORATION TO EXPAND ITS WATERFLOOD PROJECT IN THE GRAYBURG JACKSON POOL IN EDDY COUNTY, NEW MEXICO

**ADMINISTRATIVE ORDER
OF THE OIL CONSERVATION DIVISION**

Under the provisions of Division Order No. R-2268, Devon Energy Corporation has made application to the Division on November 28, 1994 for permission to expand its Keel-West Unit Waterflood Project in the Grayburg Jackson Pool in Eddy County, New Mexico.

THE DIVISION DIRECTOR FINDS THAT:

- (1) The application has been filed in due form.
- (2) Satisfactory information has been provided that all offset operators have been duly notified of the application.
- (3) No objection has been received within the waiting period as prescribed by Rule 701(B).
- (4) The proposed injection well is eligible for conversion to injection under the terms of Rule 701.
- (5) The proposed expansion of the above referenced waterflood project will not cause waste nor impair correlative rights.
- (6) The application should be approved.

IT IS THEREFORE ORDERED THAT:

The applicant, Devon Energy Corporation, be and the same is hereby authorized to inject water into the Grayburg and San Andres formations at approximately 3126 feet to approximately 4100 feet through 2 3/8-inch plastic lined tubing set in a packer located within 100 feet of the uppermost injection perforations in the wells described on Exhibit "A" attached hereto, for purposes of secondary recovery.

IT IS FURTHER ORDERED THAT:

Prior to commencing injection operations into the H.E. West "B" Well No.44, the operator shall run a cement bond log, or otherwise demonstrate that adequate cement exists behind the casing to a top of approximately 2728 feet and, if not, conduct cement squeeze operations to establish such.

The operator shall take all steps necessary to ensure that the injected water enters only the proposed injection interval and is not permitted to escape to other formations or onto the surface.

Prior to commencing injection operations into the wells, the casing shall be pressure tested from the surface to the packer setting depth to assure the integrity of said casing.

The casing-tubing annulus shall be loaded with an inert fluid and equipped with a pressure gauge at the surface or left open to the atmosphere to facilitate detection of leakage in the casing, tubing or packer.

The injection well or system shall be equipped with a pressure limiting device which will limit the wellhead pressure on the injection wells to no more than .2 psi per foot of depth to the uppermost injection perforation.

The Director of the Division may authorize an increase in injection pressure upon a proper showing by the operator of said wells that such higher pressure will not result in migration of the injected fluid from the Grayburg or San Andres formations. Such proper showing shall consist of a valid step-rate test run in accordance with and acceptable to this office.

The operator shall notify the supervisor of the Artesia district office of the Division of the date and time of the installation of injection equipment and of the mechanical integrity tests so that the same may be inspected and witnessed.

The operator shall immediately notify the supervisor of the Artesia district office of the Division of the failure of the tubing, casing or packer in said wells and shall take such steps as may be timely and necessary to correct such failure or leakage.


The subject wells shall be governed by all provisions of Division Order No. R-2268, as amended and Rules 702-706 of the Division Rules and Regulations not inconsistent herewith.

PROVIDED FURTHER THAT, jurisdiction of this cause is hereby retained by the Division for the entry of such further order or orders as may be deemed necessary or convenient for the prevention of waste and/or protection of correlative rights; upon failure of the operator to conduct operations in a manner which will ensure the protection of fresh water or in a manner inconsistent with the requirements set forth in this order, the Division may, after notice and hearing, terminate the injection authority granted herein.

The injection authority granted herein shall terminate one year after the effective date of this order if the operator has not commenced injection operations into the subject wells, provided however, the Division, upon written request by the operator, may grant an extension thereof for good cause shown.

DONE at Santa Fe, New Mexico, on this 16th day of December, 1994.

STATE OF NEW MEXICO
OIL CONSERVATION DIVISION

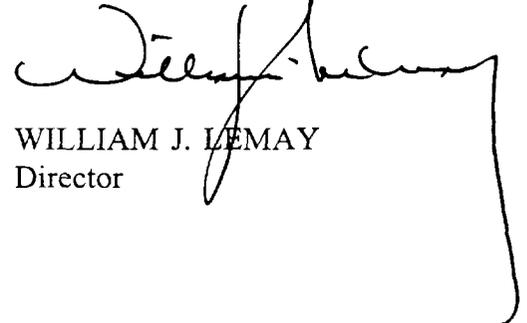

WILLIAM J. LEMAY
Director

S E A L

cc: Oil Conservation Division - Artesia

EXHIBIT "A"
 DIVISION ORDER NO. WFX-665
 KEEL-WEST UNIT WATERFLOOD PROJECT
 APPROVED INJECTION WELLS

Well Name	Well No.	Location	Unit	S-T-R	Injection Interval	Packer Depth	Tubing Size	Injection Pressure
H.E. West "A"	5	1980' FSL & 1980' FEL	J	4-17S-31E	3196'-4070'	3190'	2 3/8"	639
H.E. West "A"	14	720' FSL & 1980' FEL	O	4-17S-31E	3134'-3935'	3175'	2 3/8"	627
H.E. West "B"	16	660' FSL & 660' FWL	M	3-17S-31E	3193'-3978'	3143'	2 3/8"	639
H.E. West "A"	17	660' FSL & 660' FEL	P	4-17S-31E	3182'-3948'	3132'	2 3/8"	636
H.E. West "B"	33	1980' FSL & 660' FWL	L	3-17S-31E	3224'-4050'	3175'	2 3/8"	645
H.E. West "B"	36	1980' FNL & 660' FEL	H	9-17S-31E	3138'-4100'	3088'	2 3/8"	628
H.E. West "B"	38	2085' FNL & 1980'FWL	F	10-17S-31E	3228'-4090'	3178'	2 3/8"	646
H.E. West "B"	40	560' FNL & 660' FEL	A	10-17S-31E	3204'-4050'	3150'	2 3/8"	641
H.E. West "B"	44	720' FSL & 1980' FWL	N	3-17S-31E	3228'-4065'	3150'	2 3/8"	646
H.E. West "B"	47	890' FNL & 1980' FEL	G	9-17S-31E	3126'-3920'	3065'	2 3/8"	625

All wells in Eddy County, New Mexico