



ADMINISTRATIVE ORDER SWD-622

***APPLICATION OF MARATHON OIL COMPANY FOR SALT WATER DISPOSAL,
EDDY COUNTY, NEW MEXICO.***

**ADMINISTRATIVE ORDER
OF THE OIL CONSERVATION DIVISION**

Under the provisions of Rule 701(B), Marathon Oil Company made application to the New Mexico Oil Conservation Division on October 4, 1995, for permission to complete for salt water disposal its Indian Basin Federal "C" Well No. 1 located 1650 feet from the North line and 1650 feet from the West line (Unit F) of Section 35, Township 21 South, Range 23 East, NMPM, Eddy County, New Mexico.

THE DIVISION DIRECTOR FINDS THAT:

- (1) The application has been duly filed under the provisions of Rule 701(B) of the Division Rules and Regulations;
- (2) Satisfactory information has been provided that all offset operators and surface owners have been duly notified;
- (3) The applicant has presented satisfactory evidence that all requirements prescribed in Rule 701 will be met; and
- (4) No objections have been received within the waiting period prescribed by said rule.

IT IS THEREFORE ORDERED THAT:

The applicant herein, is hereby authorized to complete its Indian Basin Federal "C" Well No. 1 located 1650 feet from the North line and 1650 feet from the West line (Unit F) of Section 35, Township 21 South, Range 23 East, NMPM, Eddy County, New Mexico, in such a manner as to permit the injection of salt water for disposal purposes into the Devonian formation at approximately 10,000 feet to 11,000 feet through 4-1/2 inch fiberglass lined tubing set in a liner hanger/polished bore receptical at a depth of approximately 7,600 feet. In addition, the 4-1/2 inch liner shall be equipped with an external casing packer located at a depth of approximately 10,000 feet.

IT IS FURTHER ORDERED THAT:

The operator shall take all steps necessary to ensure that the injected water enters only the proposed injection interval and is not permitted to escape to other formations or onto the surface.

Prior to commencing injection operations into the well, the casing shall be pressure tested from the surface to the external packer setting depth to assure the integrity of said casing.

The operator shall comply with the special testing schedule identified on Exhibit "A" attached hereto and made a part hereof.

The casing-tubing annulus shall be loaded with an inert fluid and equipped with a pressure gauge at the surface or left open to the atmosphere to facilitate detection of leakage in the casing, tubing, or packer.

The injection well or system shall be equipped with a pressure limiting device which will limit the wellhead pressure on the injection well to no more than 2,000 psi.

The Director of the Division may authorize an increase in injection pressure upon a proper showing by the operator of said well that such higher pressure will not result in migration of the injected fluid from the Devonian formation. Such proper showing shall consist of a valid step-rate test run in accordance with and acceptable to this office.

The operator shall notify the supervisor of the Artesia district office of the Division of the date and time of the installation of disposal equipment and of the mechanical integrity test so that the same may be inspected and witnessed.

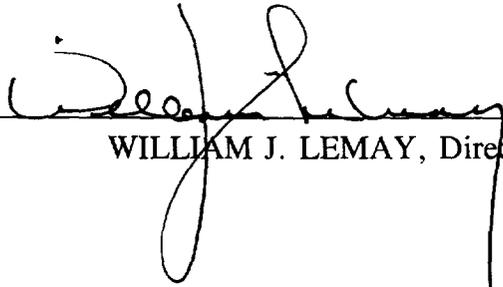
The operator shall immediately notify the supervisor of the Artesia district office of the Division of the failure of the tubing, casing, or packer in said well and shall take such steps as may be timely and necessary to correct such failure or leakage.

PROVIDED FURTHER THAT, jurisdiction of this cause is hereby retained by the Division for the entry of such further order or orders as may be deemed necessary or convenient for the prevention of waste and/or protection of correlative rights; upon failure of the operator to conduct operations in a manner which will ensure the protection of fresh water or in a manner inconsistent with the requirements set forth in this order, the Division may, after notice and hearing, terminate the injection authority granted herein.

The operator shall submit monthly reports of the disposal operations in accordance with Rule Nos. 706 and 1120 of the Division Rules and Regulations.

The injection authority granted herein shall terminate one year after the effective date of this order if the operator has not commenced injection operations into the subject well, provided however, the Division, upon written request by the operator, may grant an extension thereof for good cause shown.

Approved at Santa Fe, New Mexico, on this 4th day of April, 1996.


WILLIAM J. LEMAY, Director

S E A L

WJL/DRC

xc: Oil Conservation Division - Artesia

EXHIBIT "A"
DIVISION ORDER NO. SWD-622
SPECIAL MECHANICAL INTEGRITY TESTING SCHEDULE

WELL NAME: Indian Basin Federal "C" Well No. 1
1650' FNL & 1650' FWL, Unit F,
Section 35, T-21S, R-23E
Eddy County, New Mexico

<u>TEST TYPE</u>	<u>INITIAL TEST DATE</u>	<u>TEST FREQUENCY</u>
Cement Bond Log (4-1/2" Liner)	Upon well completion	NA
Radioactive Tracer Survey	Within 3 months after initiation of injection (Year 1)	Every 2 years
Casing Inspection Log	Year 1	Every 2 years
MIT Test (Liner & Tubing)	Year 2	Every 2 years
MIT Test (Casing/Tubing Annulus)	Upon well completion	Every 5 years