


NO. OF COPIES RECEIVED	
DISTRIBUTION	
SANTA FE	<input checked="" type="checkbox"/>
FILE	<input checked="" type="checkbox"/>
U.S.G.S.	
LAND OFFICE	
OPERATOR	

NEW MEXICO OIL CONSERVATION COMMISSION

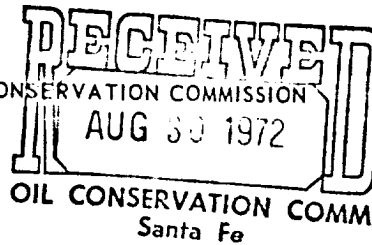

Form C-103
Supersedes Old
C-102 and C-103
Effective 1-1-65

5a. Indicate Type of Lease
State ☐ Fee ☒
5. State Oil & Gas Lease No.

SUNDRY NOTICES AND REPORTS ON WELLS
(DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR.
USE "APPLICATION FOR PERMIT -" (FORM C-101) FOR SUCH PROPOSALS.)

1. OIL WELL <input type="checkbox"/> GAS WELL <input type="checkbox"/> OTHER- <input checked="" type="checkbox"/> Recompletion Attempt	7. Unit Agreement Name
2. Name of Operator ODESSA NATURAL CORPORATION	8. Farm or Lease Name Odessa Natural Corp.
3. Address of Operator P. O. Box 3908, Odessa, Texas 79760	9. Well No. 3
4. Location of Well UNIT LETTER M 342 FEET FROM THE West LINE AND 537 FEET FROM THE South LINE, SECTION 24 TOWNSHIP 29N RANGE 19E N.M.P.M.	10. Field and Pool, or Wildcat Wildcat
15. Elevation (Show whether DF, RT, GR, etc.) GR 7271' KB 7284'	12. County Colfax

Check Appropriate Box To Indicate Nature of Notice, Report or Other Data
NOTICE OF INTENTION TO:

PERFORM REMEDIAL WORK ☐
TEMPORARILY ABANDON ☐
PULL OR ALTER CASING ☐
OTHER ☐

PLUG AND ABANDON ☐
CHANGE PLANS ☐
OTHER ☐

SUBSEQUENT REPORT OF:

REMEDIAL WORK ☐
COMMENCE DRILLING OPNS. ☐
CASING TEST AND CEMENT JOB ☐
OTHER ☐
ALTERING CASING ☒
PLUG AND ABANDONMENT ☐

17. Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work) SEE RULE 1103.

AUGUST 5, 1972 TD 5084' PBTD 4900'

- (1) Cut 4-1/2" OD casing @ 4343'.
- (2) Set 5 sx regular cmt plug on 4-1/2" OD casing stub.
- (3) Cut 7" OD casing @ 2914'.
- (4) Pulled 7" OD casing up to 2636'.
- (5) Cemented 7" OD casing w/145 sxs reg. cement w/3% CaCl₂ - no returns to surface.
- (6) Recemented 7" OD casing w/150 sxs reg. cement w/3% CaCl₂ - no returns to surface.
- (7) Perforated 7" OD casing 2 JSPF @ 2296'. Cemented w/60 sxs reg. cement w/3% CaCl₂. Held 1500 psi - 30 minutes. Top of cement by CBL 2050'.

Distribution:

3/NMOCC-Santa Fe, 1/WSRanch, 1/RLH, 1/JH, 1/JJS, 1/WF

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNED John J. Strojek TITLE Manager - Production Dept. DATE 8/29/72
APPROVED BY J. E. Kaptana TITLE Oil & Gas Inspector DATE 8/30/72
CONDITIONS OF APPROVAL, IF ANY: Dist. IV