


NO. OF COPIES RECEIVED		
DISTRIBUTION		
SANTA FE		
FILE		
U.S.G.S.		
LAND OFFICE		
OPERATOR		

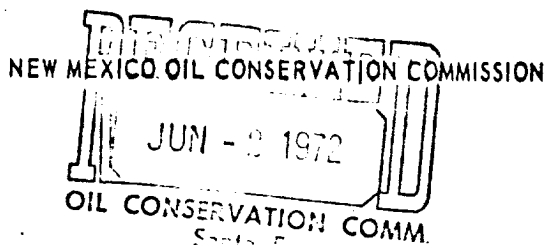

Form C-103  
Supersedes Old  
C-102 and C-103  
Effective 1-1-65

5a. Indicate Type of Lease	
State <input type="checkbox"/>	Fee <input checked="" type="checkbox"/>
5. State Oil & Gas Lease No.	

### SUNDRY NOTICES AND REPORTS ON WELLS

(DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT -" (FORM C-101) FOR SUCH PROPOSALS.)

1. OIL WELL <input type="checkbox"/> GAS WELL <input checked="" type="checkbox"/> OTHER- 2. Name of Operator ODESSA NATURAL CORPORATION 3. Address of Operator P. O. Box 3908, Odessa, Texas 79760 4. Location of Well UNIT LETTER <u>N</u> <u>1900</u> FEET FROM THE <u>West</u> LINE AND <u>990</u> FEET FROM THE <u>South</u> LINE, SECTION <u>12</u> TOWNSHIP <u>29N</u> RANGE <u>18E</u> NMPM.	7. Unit Agreement Name 8. Farm or Lease Name Odessa Natural Corp. W S Ranch 9. Well No. 4-X 10. Field and Pool, or Wildcat Wildcat 12. County Colfax
15. Elevation (Show whether DF, RT, GR, etc.) GR 7841' KB 7854'	

Check Appropriate Box To Indicate Nature of Notice, Report or Other Data

#### NOTICE OF INTENTION TO:

#### SUBSEQUENT REPORT OF:

PERFORM REMEDIAL WORK <input type="checkbox"/>	PLUG AND ABANDON <input type="checkbox"/>	REMEDIAL WORK <input type="checkbox"/>	ALTERING CASING <input type="checkbox"/>
TEMPORARILY ABANDON <input type="checkbox"/>	CHANGE PLANS <input type="checkbox"/>	COMMENCE DRILLING OPNS. <input type="checkbox"/>	PLUG AND ABANDONMENT <input type="checkbox"/>
PULL OR ALTER CASING <input type="checkbox"/>	OTHER <input type="checkbox"/>	CASING TEST AND CEMENT JOBS <input checked="" type="checkbox"/>	OTHER <input type="checkbox"/>

17. Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work) SEE RULE 1103.

MAY 30, 1972 TD 6130'

Ran 24 joints of 7" OD 23.0#/ft. N-80 LT&C Range III casing and 125 joints of 7" OD 23.0#/ft. K-55 LT&C Range III casing for a total of 149 joints 6118'. Landed @ 6129' KB. Cemented w/150 sacks regular cement with 3% CaCl<sub>2</sub>.

Held 1500 psi - 30 minutes.

Top of cement by calculation - 5625'.

#### Distribution:

3/NMOCC-Santa Fe, 1/WSRanch, 1/JH, 1/RLH, 1/JJS, 1/LC, 1/WF

I, I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNED John J. Strojek TITLE Manager - Production DATE 6/1/72

APPROVED BY J. E. Kaptana TITLE Oil & Gas Inspector DATE 6/5/72

CONDITIONS OF APPROVAL, IF ANY: