


STATE OF NEW MEXICO  
ENERGY AND MINERALS DEPARTMENT

NO. OF COPIES RECEIVED		
DISTRIBUTION		
SANTA FE		
FILE		<input checked="" type="checkbox"/>
U.S.G.S.		
LAND OFFICE		
OPERATOR		

OIL CONSERVATION DIVISION  
P. O. BOX 2088  
SANTA FE, NEW MEXICO 87501

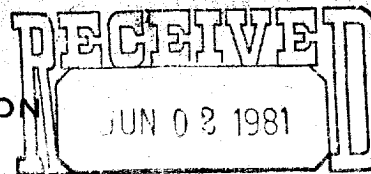

Form C-103  
Revised 10-1-78

3a. Indicate Type of Lease  
State ☐ Fee ☒  
5. State Oil & Gas Lease No.

SUNDRY NOTICES AND REPORTS ON WELLS  
(DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR.  
USE "APPLICATION FOR PERMIT -" (FORM C-101) FOR SUCH PROPOSALS.)

1. OIL WELL <input checked="" type="checkbox"/> GAS WELL <input type="checkbox"/> OTHER <input type="checkbox"/>	7. Unit Agreement Name
2. Name of Operator Public Lands Exploration Co., Inc.	8. Farm or Lease Name O'Connell
3. Address of Operator 4835 LBJ Freeway, Suite 635, Dallas, Texas 75234	9. Well No. 6
4. Location of Well UNIT LETTER M 500 FEET FROM THE South LINE AND 990 FEET FROM THE West LINE, SECTION 10 TOWNSHIP 11N RANGE 25E NMPM.	10. Field and Pool, or Wildcat Wildcat
15. Elevation (Show whether DF, RT, GR, etc.) 4480.0' GL	12. County Guadalupe

Check Appropriate Box To Indicate Nature of Notice, Report or Other Data  
NOTICE OF INTENTION TO:

PERFORM REMEDIAL WORK ☐  
TEMPORARILY ABANDON ☐  
PULL OR ALTER CASING ☐  
OTHER ☐

PLUG AND ABANDON ☐  
CHANGE PLANS ☐  
OTHER ☐

SUBSEQUENT REPORT OF:

REMEDIAL WORK ☐  
COMMENCE DRILLING OPNS. ☐  
CASING TEST AND CEMENT JOB ☐  
OTHER ☐

ALTERING CASING ☐  
PLUG AND ABANDONMENT ☒

17. Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work) SEE RULE 1103.

Spudded well 9:30 AM August 3, 1980. Drilled 11" hole to 28' TD. Ran 27.7' of 8 5/8" 32# casing and cemented with 10 sacks of neat cement containing 4% calcium chloride from TD to surface. Drilled 7 7/8" hole to 500 TD. Received permission to plug well from OCD. Set a 50 sack cement plug from 500' TD back to 325' and a 16 sack cement plug from 40' to surface. Plugging operations completed Sept. 19, 1980. Installed steel marker and covered pit. Location is ready for inspection.

Cored well as follows: 300'-325'; 325'-351'; 351'-366'; 366'-392'; 392'-418' and 418'-444'.

APPROVED

18. I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNED Charles C Joy TITLE Agent DATE May 20, 1981  
APPROVED BY Roy E Johnson TITLE PETROLEUM GEOLOGIST DATE 8-7-81  
CONDITIONS OF APPROVAL, IF ANY: