

## OIL CONSERVATION DIVISION

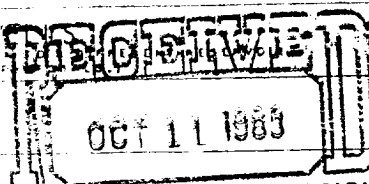
P.O. BOX 1008

SANTA FE, NEW MEXICO 87501

Form C-103  
Revised 10-1-76

NO. OF COPIES RECEIVED	
DISTRIBUTION	
SANTA FE	<input checked="" type="checkbox"/>
FILE	
U.S.G.S.	
LAND OFFICE	
OPERATOR	

1a. Indicate Type of Lease	
State <input type="checkbox"/>	Fee <input type="checkbox"/>
b. State Oil & Gas Lease No.	

SUNDARY NOTICES AND REPORTS ON WELLS  
(DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG WELLS OR TO  
USE APPLICATION FOR PERMIT TO DRILL OR TO PLUG WELLS FOR SUCH PURPOSES)

OIL WELL <input type="checkbox"/>	CAS WELL <input checked="" type="checkbox"/>	OTHER <input type="checkbox"/>
Name of Operator Trans Pecos Resources, Inc.		
Address of Operator 800 Gessner, Suite 790, Houston, Texas 77024		
Location of Well UNIT LETTER <u>A</u> <u>660</u> FEET FROM THE <u>North</u> LINE AND <u>1312</u> FEET FROM <u>East</u> <u>26</u> TOWNSHIP <u>10N</u> RANGE <u>23E</u> NMPM. THE LINE, SECTION TOWNSHIP RANGE NMPM.		
7. Unit Agreement Name		
8. Farm or Lease Name Latigo Ranch BLK D		
9. Well No. 1		
10. Field and Pool, or Wildcat Wildcat		
11. Elevation (Show whether DF, RT, GR, etc.) 4810 GL		
12. County Guadalupe		

Check Appropriate Box To Indicate Nature of Notice, Report or Other Data  
NOTICE OF INTENTION TO: SUBSEQUENT REPORT OF:

PERFORM REMEDIAL WORK <input type="checkbox"/>	PLUG AND ABANDON <input type="checkbox"/>	REMEDIAL WORK <input type="checkbox"/>	ALTERING CASING <input type="checkbox"/>
TEMPORARILY ABANDON <input type="checkbox"/>	CHANGE PLANS <input type="checkbox"/>	COMMENCE DRILLING OPNS. <input checked="" type="checkbox"/>	PLUG AND ABANDONMENT <input type="checkbox"/>
NULL OR ALTER CASING <input type="checkbox"/>	OTHER <input type="checkbox"/>	CASING TEST AND CEMENT JOB <input checked="" type="checkbox"/>	OTHER <input type="checkbox"/>

Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work) SEE RULE 1103.

Spudded 04-26-83. Drilled surface 17½" hole w/fresh water slurry. Set 8 jts. 13 3/8", 54.5#, J-55 casing at 325'. Cemented to surface w/350 sks. class "C" Neat. Drilled intermediate 12½" hole w/brine mud, set 50 jts. 8 5/8", 24#, K-55 casing at 2042, centralizers bottom 3 collars. Cemented w/900 sks. "C" Neat and 200 sks. H/L. Circulated to surface. Drilled 7 7/8" hole to 4560 w/air-mist. Drilled 7 7/8" hole to 7836 w/brine mud, T.D. 06-23-83. Ran 179 jts. 5½", 15.5# J-55 casing, set at 7533, float collar at 7488 (P.B.T.D.). Cemented to 4420 w/750 sks. "C" Neat w/4% Gel and 600 sks. "C" Neat.

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

BY	TITLE <u>President</u>	DATE <u>10/4/83</u>
BY	TITLE <u>REVISOR</u>	DATE <u>10/12/83</u>