

State of New Mexico
Energy, Minerals and Natural Resources Department

Michelle Lujan Grisham
Governor

Sarah Cottrell Propst
Cabinet Secretary

Todd E. Leahy, JD, PhD
Deputy Secretary

Adrienne Sandoval, Division Director
Oil Conservation Division



7/8/2020

**Operator Notice Regarding
C-104 Denial and Request for Information**
30-015-45233

OCD is providing notice to operators that it will deny your C-104 – *Request for Allowable and Authorization to Transport* if it fails to provide complete and accurate information, including:

Test Allowable, New Well and Recompleted Well

*Mark Box, 'AMENDED REPORT' on C-104
Re-submit with approved 3160-4 Well
Completion Report .
Refer to rule: 19.15.7.11 & 19.15.7.36*

- ☐ C-103 (or BLM equivalent) for all casing strings
 - ☐ Spud Notice
 - ☐ Surface Casing
 - ☐ Intermediate Casing (if applicable)
 - ☐ Additional Intermediate Casing (if applicable)
 - ☐ Production Casing or Liner
- ☐ Applicable Order (NSL, NSP, Other _____)
- ☐ Deviation Survey for Vertical Wells
- ☐ Directional Survey
- ☐ C-102 (As-Drilled Plat for Horizontal Well)

New Well and Recompleted Well Only

- ☐ C-103 Completion Sundry (or BLM equivalent)
- ☒ C-105 Completion Report (or BLM equivalent) *Missing Approved 3160-4*
- ☐ All Logs Run on Well

The sale or transport of product without an approved C-104 violates the Oil and Gas Act and the implementing rules, including 19.15.7.15 and 19.15.16.19 NMAC. If OCD determines that your C-104 is incomplete or inaccurate, it will give you notice to resubmit your C-104 within 30 days. Failure to comply with this notice may result in enforcement action.

If you have any questions, please contact the local OCD District Office.

Once Complete, re-submit through e docs asap.

Thank you

District I
1625 N. French Dr., Hobbs, NM 88240

District II
811 S. First St., Artesia, NM 88210

District III
1000 Rio Brazos Rd., Aztec, NM 87410

District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy, Minerals & Natural Resources

Oil Conservation Division
1220 South St. Francis Dr.
Santa Fe, NM 87505

EMNRD-OCD ARTESIA
REC'D: 6/25/2020

Form C-104
Revised August 1, 2011

Submit one copy to appropriate District Office

☒ AMENDED REPORT

I. REQUEST FOR ALLOWABLE AND AUTHORIZATION TO TRANSPORT

¹ Operator name and Address OXY USA INC. P.O. BOX 50250 MIDLAND, TX 79710		² OGRID Number 16696
		³ Reason for Filing Code/ Effective Date - NW
⁴ API Number 30-015-45233	⁵ Pool Name PURPLE SAGE WOLFCAMP	⁶ Pool Code 98220
⁷ Property Code: 322245	⁸ Property Name: PLATINUM MDP1 34-3 FEDERAL COM	⁹ Well Number: 176H

II. ¹⁰ Surface Location

Ul or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South Line	Feet from the	East/West line	County
A	34	23S	31E		110	NORTH	1003	EAST	EDDY

¹¹ Bottom Hole Location FTP: 532' FNL 452' FEL LTP: 345' FSL 384' FEL

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
P	3	24S	31E		238	SOUTH	386	EAST	EDDY
¹² Lse Code P	¹³ Producing Method Code : P		¹⁴ Gas Connection Date: 09/19/2019		¹⁵ C-129 Permit Number		¹⁶ C-129 Effective Date		¹⁷ C-129 Expiration Date


III. Oil and Gas Transporters

¹⁸ Transporter OGRID	¹⁹ Transporter Name and Address	²⁰ O/G/W
237722	CENTURION PIPELINE L.P.	O
151618	ENTERPRISE FIELD SERVICES LLC	G

IV. Well Completion Data

²¹ Spud Date 05/28/2019	²² Ready Date 09/19/2019	²³ TD 11808'V/21902'M	²⁴ PBTD 11809'V/21830'M	²⁵ Perforations 11935'-21796'	²⁶ DHC, MC
²⁷ Hole Size		²⁸ Casing & Tubing Size		²⁹ Depth Set	³⁰ Sacks Cement
17-1/2"		13-3/8"		687'	540
12-1/4"		9-5/8"		4455'	1358
8-1/2"		7-5/8"		10927'	670
6-3/4"		5-1/2"		21877'	775
		2 3/8"		11936'	

V. Well Test Data

³¹ Date New Oil 09/25/2019	³² Gas Delivery Date 09/25/2019	³³ Test Date 10/03/2019	³⁴ Test Length 24 hrs	³⁵ Tbg. Pressure	³⁶ Csg. Pressure 1680
³⁷ Choke Size 42	³⁸ Oil 3646	³⁹ Water 5894	⁴⁰ Gas 9489		⁴¹ Test Method F
⁴² I hereby certify that the rules of the Oil Conservation Division have been complied with and that the information given above is true and complete to the best of my knowledge and belief. Signature: 			OIL CONSERVATION DIVISION Approved by:  Title: Approval Date: Please refer to page 1, review attachments		
Printed name: JANA MENDIOLA					
Title: REGULATORY SPECIALIST					
E-mail Address: Janalyn_mendiola@oxy.com					
Date: 06/25/2020		Phone: 432-685-5936			

District I
1625 N. French Dr., Hobbs, NM 88240
Phone: (575) 393-6161 Fax: (575) 393-0720
District II
811 S. First St., Artesia, NM 88210
Phone: (575) 748-1283 Fax: (575) 748-9720
District III
1000 Rio Brazos Road, Aztec, NM 87410
Phone: (505) 334-6178 Fax: (505) 334-6170
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505
Phone: (505) 476-3460 Fax: (505) 476-3462

State of New Mexico
Energy, Minerals & Natural Resources Department
OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

Revised August 1, 2011
Submit one copy to appropriate
District Office

☒ AMENDED REPORT

As Drilled

WELL LOCATION AND ACREAGE DEDICATION PLAT

API Number 30-015-45233	Pool Code 99220	Pool Name Purple Sage No Pump
Property Code 322245	Property Name PLATINUM MDP1 "34-3" FEDERAL COM	Well Number 176H
OGRID No. 16096	Operator Name OXY USA INC.	Elevation 3442.8'


Surface Location

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
A	34	23 SOUTH	31 EAST, N.M.P.M.		110'	NORTH	1003'	EAST	EDDY

Bottom Hole Location If Different From Surface

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
P	3	24 SOUTH	31 EAST, N.M.P.M.		238'	SOUTH	386'	EAST	EDDY
Dedicated Acres 6.40	Joint or Infill	Consolidation Code	Order No. NSL# 7840						

No allowable will be assigned to this completion until all interests have been consolidated or a non-standard unit has been approved by the division.

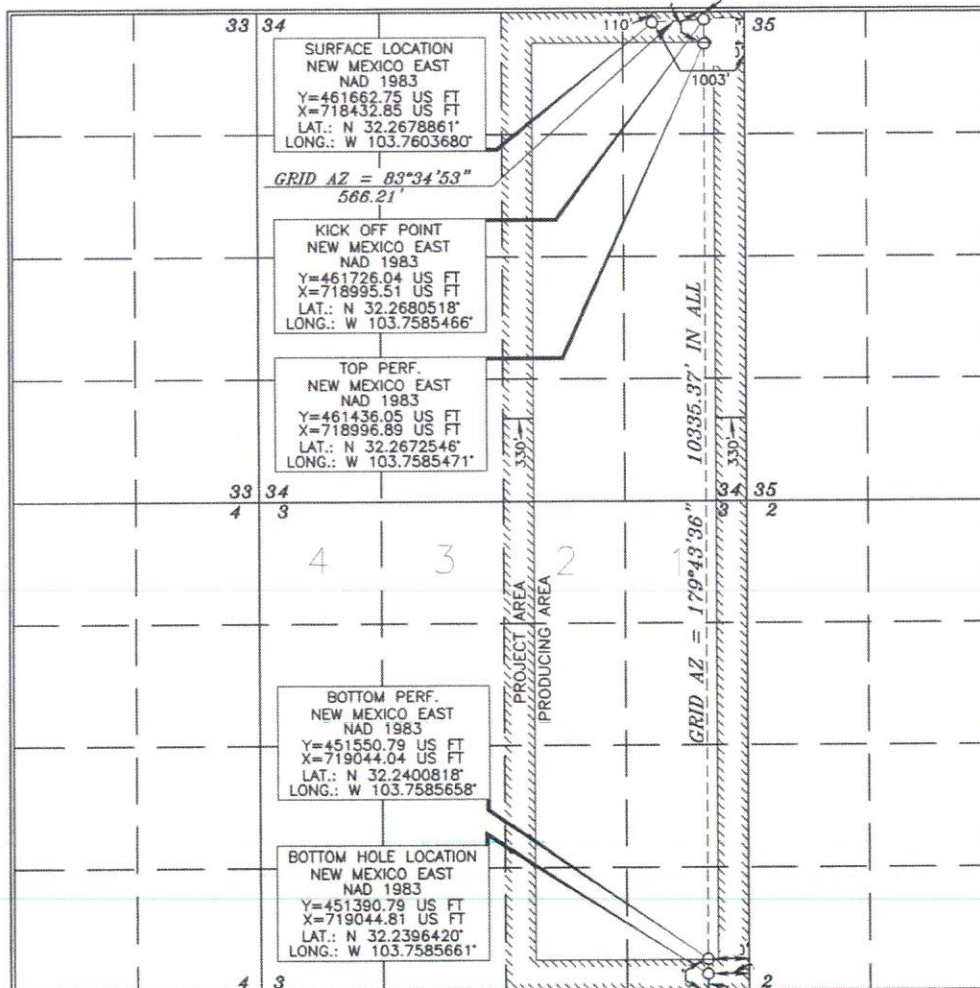

OPERATOR CERTIFICATION

I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief, and that this organization either owns a working interest or unleased mineral interest in the land including the proposed bottom hole location or has a right to drill this well at this location pursuant to a contract with an owner of such a mineral or working interest, or to a voluntary pooling agreement or a compulsory pooling order heretofore entered by the division.

Sarah Chapman 9/11/19
Signature Date

Sarah Chapman
Printed Name

sarah_chapman@oxy.com
E-mail Address

SURVEYOR CERTIFICATION

I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my belief.

TERRY J. ASE
15079
JANUARY 29, 2016
Date of Survey

Signature and Seal of
Professional Surveyor

Terry J. Abel 3/7/2016
Certificate Number 15079

WO# 180129WL-d (KA)

Intent ☐ As Drilled ☒

API #
30-015-45233

Operator Name: Oxy WA Inc.	Property Name: Platinum HDPI 34-3 Federal Com	Well Number 176H
-------------------------------	--	---------------------

Kick Off Point (KOP)

UL A	Section 34	Township 23S	Range 31E	Lot	Feet 94	From N/S NORTH	Feet 564	From E/W east	County EDDY
Latitude 32.26793					Longitude -103.75895				NAD NAD83

First Take Point (FTP)

UL A	Section 34	Township 23S	Range 31E	Lot	Feet 532	From N/S NORTH	Feet 452	From E/W east	County EDDY
Latitude 32.26711					Longitude -103.75559				NAD NAD83

Last Take Point (LTP)

UL P	Section 3	Township 24S	Range 31E	Lot	Feet 345	From N/S South	Feet 384	From E/W east	County EDDY
Latitude 32.24009					Longitude -103.75854				NAD NAD83

Is this well the defining well for the Horizontal Spacing Unit? ☐

Is this well an infill well? ☐

If infill is yes please provide API if available, Operator Name and well number for Defining well for Horizontal Spacing Unit.

API #		
Operator Name:	Property Name:	Well Number

KZ 06/29/2018

Oilfield Services, Central U.S. Land
Schlumberger Drilling and Measurements
Drilling Group
Geo Market Area: South West Texas Basin
7220 W I-H 20
Midland, Texas 79706
Phone : (432) 742-5400 (Main)
Fax : (432) 742-5606 (Shared)



August 9, 2019

Oxy USA Incorporated
5 Greenway Plaza, Suite 110
Houston, TX 77046-0521

Re:

34, 23S, 31E, Eddy NM
N 32.2678861 W -103.760368

CLIENT: Oxy USA Incorporated
WELL: Platinum MDP1 34-3 Federal Com 176H
FIELD: Purple Sage-Wolfcamp (GAS)

RIG: HP556
COUNTY: Eddy
API NO: 30-015-45233
JOB NO: 19MLH0227

Enclosed, please find the original copy of the survey performed on the referenced well by Drilling & Measurements, a division of Schlumberger Technology Corporation (P-5 No. 754900).
Other information required by your office is as follows.

<u>Name & Title of Surveyor</u>	<u>Drainhole Number</u>	<u>Surveyed Depths</u>	<u>Dates Performed</u>	<u>Type of Survey</u>
Tyler Matthews FE	Platinum MDP1 34-3 Federal Com 176H Original Hole	769.00 Ft to 21857.00 Ft	June 25, 2019 to August 1, 2019	SlimPulse Third Party Corrected

If any other information is required, please contact the undersigned at the above letterhead and phone number.
Sincerely,

Andrew Salomon
Field Service Manager


Oilfield Services, Central U.S. Land
Schlumberger Drilling and Measurements
Drilling Group
Geo Market Area: South West Texas Basin
7220 W I-H 20
Midland, Texas 79706
Phone : (432) 742-5400 (Main)
Fax : (432) 742-5606 (Shared)

Schlumberger

Well Reference:
34, 23S, 31E, Eddy NM
N 32.2678861 W -103.760368

I, Tyler Matthews certify that; I am employed by Drilling & Measurements, a division of Schlumberger Technology Corporation; that I did on the day(s) of June 25, 2019 through August 01, 2019, conduct or supervise the taking of the SlimPulse & Third Party Corrected surveys from a depth of 769.00 feet to a depth of 21857.00 feet referenced to driller's depth; that the data is true, correct, complete and within the limitations of the tool as set forth by Drilling & Measurements, a division of Schlumberger Technology Corporation; that I am authorized and qualified to make this report; that this survey was conducted at the request of Oxy USA Incorporated for the Platinum MDP1 34-3 Federal Com 176H Well (Original Hole) API No. 30-015-45233 in New Mexico; and that I have reviewed this report and find that it conforms to the principals and procedures as set forth by Drilling & Measurements, a division of Schlumberger Technology Corporation.

By
Tyler Matthews
FE



Subscribed and Sworn to before me this 13 day of August (month) 2019 (yr)

My Commission expires:

6/14/2023



Notary Public

Comanche, Oklahoma

(County State)

(signature)



Oxy Platinum MDP1 34-3 Federal Com 176H Gyro+MWD 0-21902'MD

Survey Geodetic Report

(Def Survey)

Report Date: August 01, 2019 - 02:11 PM Client: OXY Field: NM Eddy County (NAD 83) Structure / Slot: Oxy Platinum MDP1 34-3 Federal Com 176H / Oxy Platinum MDP1 34-3 Federal Com 176H Well: Oxy Platinum MDP1 34-3 Federal Com 176H Borehole: Original Borehole UWI / API#: Unknown / 30-015-45233 Survey Name: Oxy Platinum MDP1 34-3 Federal Com 176H Gyro+MWD 0-21902'MD Survey Date: June 20, 2019 Tort / AHD / DDI / ERD Ratio: 278.851 ° / 10817.273 ft / 6.745 / 0.910 Coordinate Reference System: NAD83 New Mexico State Plane, Eastern Zone, US Feet Location Lat / Long: N 32° 16' 4.38990", W 103° 45' 37.32479" Location Grid N/E Y/X: N 461662.750 ftUS, E 718432.850 ftUS CRS Grid Convergence Angle: 0.3059 ° Grid Scale Factor: 0.99994501 Version / Patch: 2.10.760.0	Survey / DLS Computation: Minimum Curvature / Lubinski Vertical Section Azimuth: 176.574 ° (Grid North) Vertical Section Origin: 0.000 ft, 0.000 ft TVD Reference Datum: RKB TVD Reference Elevation: 3472.800 ft above MSL Seabed / Ground Elevation: 3442.800 ft above MSL Magnetic Declination: 6.759 ° Total Gravity Field Strength: 998.4462mgn (9.80665 Based) Gravity Model: GARM Total Magnetic Field Strength: 47958.100 nT Magnetic Dip Angle: 59.947 ° Declination Date: July 22, 2019 Magnetic Declination Model: IFR1 North Reference: Grid North Grid Convergence Used: 0.3059 ° Total Corr Mag North->Grid North: 6.4531 ° Local Coord Referenced To: Well Head
---	--

Comments	MD (ft)	Incl (°)	Azim Grid (°)	TVD (ft)	VSEC (ft)	NS (ft)	EW (ft)	DLS (°/100ft)	Northing (ftUS)	Easting (ftUS)	Latitude (N/S ° ' ")	Longitude (E/W ° ' ")
WRP	0.00	0.00	176.59	0.00	0.00	0.00	0.00	N/A	461662.75	718432.85	N 32 16 4.39	W 103 45 37.32
SHL	30.00	0.00	0.00	30.00	0.00	0.00	0.00	0.00	461662.75	718432.85	N 32 16 4.39	W 103 45 37.32
	105.00	0.53	223.97	105.00	0.23	-0.25	-0.24	0.71	461662.50	718432.61	N 32 16 4.39	W 103 45 37.33
	138.00	0.61	228.55	138.00	0.45	-0.48	-0.48	0.28	461662.27	718432.37	N 32 16 4.39	W 103 45 37.33
	221.00	0.58	238.00	220.99	0.92	-0.99	-1.17	0.12	461661.76	718431.68	N 32 16 4.38	W 103 45 37.34
	308.00	0.65	340.44	307.99	0.66	-0.76	-1.70	1.10	461661.99	718431.15	N 32 16 4.38	W 103 45 37.34
	402.00	0.75	240.01	401.99	0.42	-0.56	-2.42	1.15	461662.19	718430.43	N 32 16 4.38	W 103 45 37.35
	497.00	0.76	135.39	496.98	1.17	-1.32	-2.51	1.26	461661.43	718430.34	N 32 16 4.38	W 103 45 37.35
	591.00	0.93	245.17	590.98	1.92	-2.09	-2.77	1.47	461660.66	718430.08	N 32 16 4.37	W 103 45 37.36
Last Gyro	685.00	1.07	245.92	684.96	2.51	-2.77	-4.26	0.15	461659.98	718428.59	N 32 16 4.36	W 103 45 37.37
	769.00	0.45	269.97	768.95	2.76	-3.09	-5.31	0.81	461659.66	718427.54	N 32 16 4.36	W 103 45 37.39
	859.00	0.23	335.68	858.95	2.57	-2.92	-5.73	0.46	461659.83	718427.12	N 32 16 4.36	W 103 45 37.39
	950.00	0.16	317.02	949.95	2.31	-2.66	-5.90	0.10	461660.09	718426.95	N 32 16 4.36	W 103 45 37.39
	1041.00	0.15	255.61	1040.95	2.23	-2.60	-6.10	0.17	461660.15	718426.75	N 32 16 4.36	W 103 45 37.40
	1131.00	0.16	299.60	1130.95	2.18	-2.57	-6.32	0.13	461660.18	718426.53	N 32 16 4.36	W 103 45 37.40
	1221.00	0.08	308.43	1220.95	2.07	-2.47	-6.48	0.09	461660.28	718426.37	N 32 16 4.37	W 103 45 37.40
	1313.00	0.13	276.29	1312.95	2.01	-2.41	-6.63	0.08	461660.34	718426.22	N 32 16 4.37	W 103 45 37.40
	1499.00	0.09	271.61	1498.95	1.96	-2.39	-6.99	0.02	461660.36	718425.86	N 32 16 4.37	W 103 45 37.41
	1593.00	0.09	207.79	1592.95	2.02	-2.45	-7.10	0.10	461660.30	718425.75	N 32 16 4.37	W 103 45 37.41
	1688.00	0.22	165.86	1687.95	2.26	-2.69	-7.09	0.17	461660.06	718425.76	N 32 16 4.36	W 103 45 37.41
	1782.00	0.14	197.30	1781.95	2.55	-2.98	-7.08	0.13	461659.77	718425.77	N 32 16 4.36	W 103 45 37.41
	1971.00	0.09	157.42	1970.95	2.91	-3.34	-7.09	0.05	461659.42	718425.76	N 32 16 4.36	W 103 45 37.41
	2066.00	0.03	104.67	2065.95	2.98	-3.41	-7.04	0.08	461659.34	718425.81	N 32 16 4.36	W 103 45 37.41
	2160.00	0.10	91.91	2159.95	3.00	-3.42	-6.93	0.08	461659.33	718425.92	N 32 16 4.36	W 103 45 37.41
	2255.00	0.08	93.23	2254.95	3.01	-3.43	-6.78	0.02	461659.32	718426.07	N 32 16 4.36	W 103 45 37.40
	2349.00	0.08	69.02	2348.95	3.00	-3.41	-6.66	0.04	461659.34	718426.20	N 32 16 4.36	W 103 45 37.40
	2444.00	0.27	12.62	2443.95	2.77	-3.16	-6.54	0.25	461659.59	718426.31	N 32 16 4.36	W 103 45 37.40
	2633.00	0.30	45.17	2632.95	2.01	-2.38	-6.10	0.09	461660.37	718426.75	N 32 16 4.37	W 103 45 37.40
	2727.00	0.25	60.73	2726.94	1.76	-2.11	-5.74	0.10	461660.64	718427.11	N 32 16 4.37	W 103 45 37.39
	2822.00	0.17	63.48	2821.94	1.61	-1.94	-5.44	0.08	461660.81	718427.41	N 32 16 4.37	W 103 45 37.39
	2916.00	0.06	149.83	2915.94	1.60	-1.92	-5.29	0.19	461660.83	718427.56	N 32 16 4.37	W 103 45 37.39
	3011.00	0.06	23.22	3010.94	1.60	-1.92	-5.24	0.11	461660.83	718427.61	N 32 16 4.37	W 103 45 37.39
	3105.00	0.11	116.21	3104.94	1.60	-1.91	-5.14	0.14	461660.84	718427.71	N 32 16 4.37	W 103 45 37.38
	3200.00	0.13	135.43	3199.94	1.73	-2.03	-4.98	0.05	461660.72	718427.87	N 32 16 4.37	W 103 45 37.38
	3294.00	0.06	45.22	3293.94	1.78	-2.07	-4.87	0.15	461660.68	718427.98	N 32 16 4.37	W 103 45 37.38
	3389.00	0.11	88.74	3388.94	1.75	-2.04	-4.75	0.08	461660.71	718428.10	N 32 16 4.37	W 103 45 37.38
	3483.00	0.16	112.08	3482.94	1.81	-2.08	-4.54	0.08	461660.67	718428.31	N 32 16 4.37	W 103 45 37.38
	3578.00	0.41	155.73	3577.94	2.18	-2.44	-4.27	0.33	461660.31	718428.58	N 32 16 4.37	W 103 45 37.37
	3672.00	0.54	184.19	3671.94	2.94	-3.19	-4.17	0.28	461659.56	718428.68	N 32 16 4.36	W 103 45 37.37
	3767.00	0.18	128.01	3766.94	3.48	-3.73	-4.08	0.49	461659.02	718428.77	N 32 16 4.35	W 103 45 37.37
	3861.00	0.13	150.59	3860.94	3.67	-3.91	-3.91	0.08	461658.84	718428.94	N 32 16 4.35	W 103 45 37.37
	3956.00	0.49	185.46	3955.94	4.17	-4.41	-3.90	0.41	461658.34	718428.95	N 32 16 4.35	W 103 45 37.37
	4050.00	0.51	209.88	4049.93	4.92	-5.17	-4.15	0.23	461657.58	718428.70	N 32 16 4.34	W 103 45 37.37
	4145.00	0.43	182.19	4144.93	5.63	-5.90	-4.37	0.25	461656.85	718428.48	N 32 16 4.33	W 103 45 37.38
	4240.00	0.38	167.22	4239.93	6.29	-6.56	-4.31	0.12	461656.19	718428.54	N 32 16 4.33	W 103 45 37.38
	4334.00	0.25	139.76	4333.92	6.76	-7.02	-4.11	0.21	461655.73	718428.74	N 32 16 4.32	W 103 45 37.37
	4352.00	0.20	157.80	4351.92	6.82	-7.08	-4.08	0.48	461655.67	718428.77	N 32 16 4.32	W 103 45 37.37
	4552.00	0.92	43.19	4551.92	6.05	-6.23	-2.84	0.51	461656.52	718430.01	N 32 16 4.33	W 103 45 37.36
	4663.00	2.96	44.86	4662.85	3.53	-3.55	-0.21	1.84	461659.20	718432.64	N 32 16 4.35	W 103 45 37.33
4756.00	3.86	35.28	4755.68	-0.51	0.71	3.29	1.14	461663.46	718436.14	N 32 16 4.40	W 103 45 37.29	
4850.00	4.80	28.89	4849.41	-6.30	6.73	7.02	1.12	461669.48	718439.87	N 32 16 4.46	W 103 45 37.24	
4945.00	5.49	25.21	4944.03	-13.65	14.32	10.87	0.80	461677.07	718443.72	N 32 16 4.53	W 103 45 37.20	
5135.00	7.69	19.36	5132.77	-33.35	34.54	18.96	1.21	461697.29	718451.81	N 32 16 4.73	W 103 45 37.10	
5229.00	7.93	16.66	5225.89	-45.24	46.69	22.90	0.47	461709.44	718455.75	N 32 16 4.85	W 103 45 37.06	
5324.00	5.87	11.34	5320.20	-56.09	57.73	25.74	2.27	461720.48	718458.59	N 32 16 4.96	W 103 45 37.02	
5418.00	3.82	352.50	5413.87	-63.86	65.55	26.27	2.73	461728.30	718459.12	N 32 16 5.04	W 103 45 37.01	
5513.00	2.74	317.71	5508.72	-68.79	70.37	24.33	2.33	461733.11	718457.18	N 32 16 5.08	W 103 45 37.04	
5607.00	2.34	271.08	5602.64	-70.69	72.07	20.90	2.17	461734.81	718453.75	N 32 16 5.10	W 103 45 37.08	
5702.00	0.08	148.25	5697.61	-70.78	72.05	19.00	2.51	461734.79	718451.85	N 32 16 5.10	W 103 45 37.10	
5796.00	0.05	318.46	5791.61	-70.76	72.02	19.00	0.14	461734.77	718451.85	N 32 16 5.10	W 103 45 37.10	
5985.00	0.09	181.81	5980.61	-70.67	71.94	18.95	0.07	461734.68	718451.79	N 32 16 5.10	W 103 45 37.10	
6080.00	0.09	291.62	6075.61	-70.63	71.89	18.87	0.16	461734.63	718451.72	N 32 16 5.10	W 103 45 37.10	
6175.00	0.06	117.44	6170.61	-70.64	71.89	18.85	0.16	461734.64	718451.70	N 32 16 5.10	W 103 45 37.10	
6269.00	0.08	154.71	6264.61	-70.55	71.81	18.92	0.05	461734.56	718451.77	N 32 16 5.10	W 103 45 37.10	
6364.00	0.04	233.26	6359.61	-70.47	71.73	18.92	0.09	461734.48	718451.77	N 32 16 5.10	W 103 45 37.10	
6459.00	0.06	192.95	6454.61	-70.41	71.66	18.88	0.04	461734.41	718451.73	N 32 16 5.10	W 103 45 37.10	
6553.00	0.12	250.50	6548.61	-70.33	71.58	18.78	0.11	461734.33	718451.63	N 32 16 5.10	W 103 45 37.10	
6648.00	0.05	232.73	6643.61	-70.28	71.52	18.65	0.08	461734.27	718451.50	N 32 16 5.10	W 103 45 37.10	
6742.00	0.12	257.75	6737.61	-70.24	71.48	18.52	0.08	461734.22	718451.37	N 32 16 5.10	W 103 45 37.10	
6837.00	0.11	247.61	6832.61	-70.20	71.42	18.34	0.02	461734.17	718451.19	N 32 16 5.10	W 103 45 37.11	
7027.00	0.06	138.04	7022.61	-70.06	71.28	18.24	0.07	461734.02	718451.09	N 32 16 5.09	W 103 45 37.11	
7216.00	0.32	271.11	7211.61	-70.03	71.21	17.78	0.19	461733.96	718450.63	N 32 16 5.09	W 103 45 37.11	
7405.00	0.06	350.24	7400.61	-70.17	71.32	17.23	0.17	461734.07	718450.08	N 32 16 5.09	W 103 45 37.12	
7500.00	0.09	315.24	7495.61	-70.27	71.42	17.17	0.06	461734.17	718450.02	N 32 16 5.10	W 103 45 37.12	
7594.00	0.08	53.85	7589.61	-70.36	71.52	17.17	0.14	461734.26	718450.02	N 32 16 5.10	W 103 45 37.12	
7689.00	0.09	190.39	7684.61	-70.32	71.48	17.22	0.17	461734.23	718450.06	N 32 16 5.10	W 103 45 37.12	
7879.00	0.12	275.72	7874.61	-70.21	71.35	16.99	0.08	461734.10	718449.84	N 32 16 5.10	W 103 45 37.12	

Comments	MD (ft)	Incl (°)	Azim Grid (°)	TVD (ft)	VSEC (ft)	NS (ft)	EW (ft)	DLS (°/100ft)	Northing (ftUS)	Easting (ftUS)	Latitude (N/S ° ' ")	Longitude (E/W ° ' ")
	7973.00	0.09	255.55	7968.61	-70.21	71.35	16.82	0.05	461734.09	718449.67	N 32 16 5.09 W	103 45 37.12
	8068.00	0.08	323.04	8063.61	-70.25	71.38	16.71	0.10	461734.13	718449.56	N 32 16 5.10 W	103 45 37.13
	8162.00	0.01	308.89	8157.61	-70.31	71.44	16.66	0.07	461734.18	718449.51	N 32 16 5.10 W	103 45 37.13
	8257.00	0.10	93.97	8252.61	-70.31	71.44	16.74	0.11	461734.18	718449.59	N 32 16 5.10 W	103 45 37.13
	8352.00	0.29	137.63	8347.61	-70.11	71.25	16.98	0.24	461734.00	718449.83	N 32 16 5.09 W	103 45 37.12
	8541.00	0.22	93.31	8536.60	-69.70	70.88	17.67	0.11	461733.63	718450.52	N 32 16 5.09 W	103 45 37.11
	8636.00	0.76	54.59	8631.60	-70.01	71.23	18.36	0.64	461733.98	718451.21	N 32 16 5.09 W	103 45 37.11
	8731.00	0.98	47.91	8726.59	-70.85	72.14	19.48	0.25	461734.89	718452.33	N 32 16 5.10 W	103 45 37.09
	8825.00	0.35	357.59	8820.58	-71.64	72.97	20.06	0.85	461735.72	718452.91	N 32 16 5.11 W	103 45 37.09
	8920.00	1.19	155.68	8915.58	-71.01	72.36	20.46	1.60	461735.11	718453.31	N 32 16 5.10 W	103 45 37.08
	9014.00	1.74	149.15	9009.55	-68.83	70.25	21.59	0.61	461732.99	718454.44	N 32 16 5.08 W	103 45 37.07
	9109.00	1.80	135.93	9104.50	-66.42	67.94	23.37	0.43	461730.68	718456.22	N 32 16 5.06 W	103 45 37.05
	9204.00	3.07	122.35	9199.41	-63.80	65.50	26.56	1.46	461728.25	718459.41	N 32 16 5.04 W	103 45 37.01
	9298.00	3.42	101.71	9293.27	-61.59	63.59	31.43	1.29	461726.33	718464.28	N 32 16 5.02 W	103 45 36.95
	9393.00	4.13	99.63	9388.06	-60.08	62.44	37.58	0.76	461725.19	718470.42	N 32 16 5.01 W	103 45 36.88
	9487.00	5.38	99.90	9481.73	-58.30	61.11	45.26	1.33	461723.86	718478.10	N 32 16 4.99 W	103 45 36.79
	9582.00	6.81	106.73	9576.20	-55.33	58.73	55.04	1.69	461721.47	718487.88	N 32 16 4.97 W	103 45 36.68
	9677.00	7.28	108.91	9670.48	-51.10	55.16	66.13	0.57	461717.90	718498.97	N 32 16 4.93 W	103 45 36.55
	9772.00	9.04	103.77	9764.51	-46.61	51.43	79.07	2.00	461714.18	718511.92	N 32 16 4.89 W	103 45 36.40
	9866.00	11.26	99.60	9857.04	-42.36	48.14	95.29	2.49	461710.89	718528.14	N 32 16 4.86 W	103 45 36.21
	9961.00	13.47	100.03	9949.83	-37.69	44.67	115.34	2.33	461707.41	718548.18	N 32 16 4.83 W	103 45 35.98
	10055.00	15.07	99.12	10040.93	-32.49	40.82	138.18	1.72	461703.57	718571.03	N 32 16 4.79 W	103 45 35.71
	10150.00	14.62	92.83	10132.76	-28.50	38.27	162.35	1.76	461701.02	718595.19	N 32 16 4.76 W	103 45 35.43
	10245.00	13.43	90.32	10224.93	-26.47	37.62	185.36	1.41	461700.37	718618.20	N 32 16 4.75 W	103 45 35.16
	10339.00	14.83	92.03	10316.08	-24.61	37.13	208.30	1.55	461699.88	718641.14	N 32 16 4.75 W	103 45 34.90
	10434.00	15.19	92.63	10407.84	-22.15	36.13	232.88	0.41	461698.88	718665.72	N 32 16 4.74 W	103 45 34.61
	10623.00	15.17	92.51	10590.25	-16.98	33.91	282.32	0.02	461696.66	718715.16	N 32 16 4.71 W	103 45 34.03
	10718.00	14.75	92.70	10682.03	-14.40	32.80	306.82	0.45	461695.54	718739.66	N 32 16 4.70 W	103 45 33.75
	10812.00	12.92	96.84	10773.30	-11.25	30.98	329.21	2.21	461693.73	718762.04	N 32 16 4.68 W	103 45 33.49
	10907.00	11.62	100.09	10866.13	-7.12	28.04	349.18	1.55	461690.79	718782.01	N 32 16 4.65 W	103 45 33.26
	10959.00	10.77	101.39	10917.14	-4.65	26.16	359.10	1.71	461688.91	718791.93	N 32 16 4.63 W	103 45 33.14
	11053.00	10.61	100.74	11009.51	-0.29	22.82	376.21	0.21	461685.56	718809.04	N 32 16 4.60 W	103 45 32.94
	11148.00	12.25	96.33	11102.62	3.56	20.07	394.82	1.95	461682.82	718827.65	N 32 16 4.57 W	103 45 32.73
	11243.00	14.49	93.54	11195.04	6.71	18.23	416.70	2.45	461680.98	718849.53	N 32 16 4.55 W	103 45 32.47
	11338.00	12.93	97.08	11287.33	10.09	16.18	439.11	1.86	461678.93	718871.94	N 32 16 4.53 W	103 45 32.21
KOP Actual 100' FNL Crossed	11389.00	15.60	113.82	11336.78	14.27	12.71	451.06	9.59	461675.46	718883.88	N 32 16 4.49 W	103 45 32.07
	11432.00	18.56	123.66	11377.88	21.05	6.58	462.05	9.59	461669.33	718894.87	N 32 16 4.43 W	103 45 31.94
	11526.00	26.21	150.76	11464.96	48.87	-19.94	484.73	13.47	461642.81	718917.56	N 32 16 4.17 W	103 45 31.68
	11621.00	37.25	160.79	11545.69	95.60	-65.57	504.52	12.84	461597.19	718937.34	N 32 16 3.71 W	103 45 31.45
Wolfcamp Intersection	11674.80	39.04	161.07	11588.00	127.60	-96.97	515.37	3.33	461565.79	718948.19	N 32 16 3.40 W	103 45 31.33
	11715.00	40.37	161.26	11618.93	152.35	-121.27	523.66	3.33	461541.48	718956.48	N 32 16 3.16 W	103 45 31.23
	11810.00	45.24	170.18	11688.67	215.64	-183.74	539.32	8.18	461479.02	718972.14	N 32 16 2.54 W	103 45 31.06
	11904.00	52.93	173.87	11750.20	286.39	-254.03	549.04	8.70	461408.74	718981.85	N 32 16 1.85 W	103 45 30.95
	11999.00	59.23	175.02	11803.19	365.13	-332.45	556.63	6.71	461330.32	718989.45	N 32 16 1.07 W	103 45 30.86
	12094.00	68.99	174.64	11844.62	450.45	-417.47	564.34	10.28	461245.31	718997.16	N 32 16 0.23 W	103 45 30.78
	12188.00	81.74	176.13	11868.33	541.19	-507.93	571.61	13.65	461154.85	719004.42	N 32 15 59.33 W	103 45 30.70
	12283.00	87.78	176.40	11877.00	635.75	-602.29	577.76	6.36	461060.49	719010.58	N 32 15 58.40 W	103 45 30.63
	12354.00	86.08	176.11	11880.80	706.64	-673.04	582.40	2.43	460989.75	719015.21	N 32 15 57.70 W	103 45 30.58
	12449.00	86.67	177.19	11886.81	801.45	-767.68	587.94	1.29	460895.11	719020.75	N 32 15 56.76 W	103 45 30.53
	12543.00	89.14	178.58	11890.24	895.35	-861.55	591.40	3.01	460801.25	719024.22	N 32 15 55.83 W	103 45 30.49
	12638.00	91.76	180.03	11889.50	990.23	-956.52	592.55	3.15	460706.28	719025.37	N 32 15 54.89 W	103 45 30.48
	12733.00	92.24	181.19	11886.18	1084.94	-1051.46	591.54	1.32	460611.35	719024.36	N 32 15 53.95 W	103 45 30.50
	12828.00	92.55	182.81	11882.21	1179.42	-1146.32	588.23	1.73	460516.50	719021.05	N 32 15 53.02 W	103 45 30.55
	12922.00	92.83	183.77	11877.80	1272.67	-1240.06	582.84	1.06	460422.76	719015.66	N 32 15 52.09 W	103 45 30.61
	13017.00	91.90	182.46	11873.88	1366.97	-1334.83	577.68	1.69	460327.99	719010.50	N 32 15 51.15 W	103 45 30.68
	13111.00	91.93	180.77	11870.74	1460.55	-1428.74	575.04	1.80	460234.09	719007.85	N 32 15 50.22 W	103 45 30.72
	13206.00	89.80	179.09	11869.30	1555.37	-1523.72	575.15	2.86	460139.12	719007.97	N 32 15 49.28 W	103 45 30.72
	13300.00	88.80	176.23	11870.45	1649.34	-1617.62	578.99	3.22	460045.22	719011.81	N 32 15 48.35 W	103 45 30.68
	13395.00	90.21	176.96	11871.27	1744.33	-1712.45	584.63	1.67	459950.40	719017.45	N 32 15 47.41 W	103 45 30.62
	13489.00	92.14	179.89	11869.34	1838.25	-1806.38	587.22	3.73	459856.47	719020.03	N 32 15 46.48 W	103 45 30.60
	13584.00	92.24	181.40	11865.71	1932.93	-1901.30	586.15	1.59	459761.56	719018.96	N 32 15 45.55 W	103 45 30.62
	13678.00	91.59	180.03	11862.57	2026.63	-1995.24	584.97	1.61	459667.63	719017.79	N 32 15 44.62 W	103 45 30.64
	13773.00	91.66	180.40	11859.88	2121.40	-2090.20	584.62	0.40	459572.67	719017.43	N 32 15 43.68 W	103 45 30.65
	13867.00	92.14	181.60	11856.76	2215.07	-2184.13	582.98	1.37	459478.74	719015.80	N 32 15 42.75 W	103 45 30.67
	13962.00	90.69	178.34	11854.42	2309.86	-2279.09	583.03	3.75	459383.79	719015.85	N 32 15 41.81 W	103 45 30.68
	14056.00	91.28	180.37	11852.80	2403.73	-2373.06	584.09	2.25	459289.82	719016.90	N 32 15 40.88 W	103 45 30.67
	14151.00	91.04	180.39	11850.88	2498.50	-2468.04	583.46	0.25	459194.85	719016.27	N 32 15 39.94 W	103 45 30.68
	14245.00	91.00	180.31	11849.20	2592.28	-2562.02	582.88	0.10	459100.87	719015.70	N 32 15 39.01 W	103 45 30.70
	14339.00	91.00	182.64	11847.56	2685.92	-2655.97	580.46	2.48	459006.93	719013.28	N 32 15 38.08 W	103 45 30.73
	14434.00	90.62	181.63	11846.22	2780.46	-2750.89	576.93	1.14	458912.01	719008.74	N 32 15 37.14 W	103 45 30.78
	14529.00	90.31	181.59	11845.45	2875.09	-2845.85	574.26	0.33	458817.06	719007.07	N 32 15 36.20 W	103 45 30.81
	14623.00	90.21	181.07	11845.02	2968.76	-2939.83	572.07	0.56	458723.09	719004.89	N 32 15 35.27 W	103 45 30.85
	14812.00	90.31	181.90	11844.16	3157.07	-3128.76	567.18	0.44	458534.17	718999.99	N 32 15 33.40 W	103 45 30.91
	15001.00	90.14	181.27	11843.42	3345.34	-3317.68	561.95	0.35	458345.25	718994.77	N 32 15 31.53 W	103 45 30.99
	15096.00	90.42	180.55	11842.96	3440.07	-3412.67	560.44	0.81	458250.27	718993.26	N 32 15 30.59 W	103 45 31.01
	15190.00	90.31	180.49	11842.36	3533.84	-3506.67	559.59	0.13	458156.28	718992.41	N 32 15 29.66 W	103 45 31.03
	15285.00	90.14	181.42	11841.99	3628.56	-3601.65	558.00	1.00	458061.31	718990.82		

Comments	MD (ft)	Incl (°)	Azim Grid (°)	TVD (ft)	VSEC (ft)	NS (ft)	EW (ft)	DLS (°/100ft)	Northing (ftUS)	Easting (ftUS)	Latitude (N/S ° ' ")	Longitude (E/W ° ' ")
	18594.00	90.00	180.60	11824.52	6931.60	-6909.20	581.46	0.55	454753.95	719014.27	N 32 14 55.99	W 103 45 30.98
	18688.00	90.80	181.09	11823.86	7025.33	-7003.18	580.07	1.00	454659.97	719012.89	N 32 14 55.06	W 103 45 31.01
	18783.00	90.73	181.37	11822.60	7120.01	-7098.15	578.03	0.30	454565.00	719010.85	N 32 14 54.12	W 103 45 31.04
	18878.00	89.94	180.02	11822.04	7214.76	-7193.14	576.88	1.65	454470.02	719009.70	N 32 14 53.18	W 103 45 31.05
	18972.00	90.62	180.46	11821.58	7308.57	-7287.14	576.49	0.86	454376.03	719009.30	N 32 14 52.25	W 103 45 31.07
	19067.00	90.59	180.58	11820.58	7403.33	-7382.13	575.62	0.13	454281.04	719008.44	N 32 14 51.31	W 103 45 31.08
	19162.00	91.55	178.64	11818.80	7498.18	-7477.10	576.27	2.28	454186.07	719009.09	N 32 14 50.37	W 103 45 31.08
	19256.00	90.90	178.29	11816.79	7592.11	-7571.05	578.79	0.79	454092.13	719011.60	N 32 14 49.44	W 103 45 31.06
	19351.00	90.55	178.41	11815.59	7687.05	-7666.00	581.52	0.39	453997.19	719014.34	N 32 14 48.50	W 103 45 31.03
	19445.00	90.24	178.81	11814.94	7780.99	-7759.97	583.80	0.54	453903.22	719016.62	N 32 14 47.57	W 103 45 31.01
	19540.00	90.59	178.06	11814.26	7875.94	-7854.93	586.40	0.87	453808.27	719019.21	N 32 14 46.63	W 103 45 30.99
	19634.00	90.49	178.21	11813.37	7969.90	-7948.88	589.46	0.19	453714.33	719022.27	N 32 14 45.70	W 103 45 30.96
	19729.00	91.24	178.72	11811.94	8064.83	-8043.83	592.00	0.95	453619.38	719024.82	N 32 14 44.77	W 103 45 30.93
	19918.00	90.66	178.29	11808.80	8253.70	-8232.74	596.93	0.38	453430.48	719029.75	N 32 14 42.90	W 103 45 30.89
	20013.00	90.35	177.99	11807.97	8348.66	-8327.69	600.01	0.45	453335.54	719032.83	N 32 14 41.96	W 103 45 30.86
	20202.00	91.52	179.73	11804.88	8537.47	-8516.61	603.77	1.11	453146.62	719036.59	N 32 14 40.09	W 103 45 30.82
	20296.00	90.73	178.54	11803.04	8631.36	-8610.58	605.19	1.52	453052.66	719038.01	N 32 14 39.16	W 103 45 30.81
	20390.00	90.42	177.66	11802.09	8725.32	-8704.52	608.31	0.99	452958.72	719041.12	N 32 14 38.23	W 103 45 30.78
	20485.00	90.76	178.02	11801.11	8820.29	-8799.45	611.89	0.52	452863.80	719044.70	N 32 14 37.29	W 103 45 30.75
	20675.00	87.01	177.41	11804.81	9010.18	-8989.23	619.46	2.00	452674.03	719052.28	N 32 14 35.41	W 103 45 30.67
	20769.00	89.69	178.29	11807.52	9104.11	-9083.12	622.99	3.00	452580.15	719055.80	N 32 14 34.48	W 103 45 30.64
	20959.00	90.42	180.73	11807.33	9293.85	-9273.09	624.61	1.34	452390.19	719057.42	N 32 14 32.60	W 103 45 30.63
	21054.00	90.21	180.42	11806.81	9388.61	-9368.09	623.66	0.39	452295.20	719056.47	N 32 14 31.66	W 103 45 30.65
	21243.00	90.45	180.98	11805.72	9577.12	-9557.07	621.35	0.32	452106.23	719054.16	N 32 14 29.79	W 103 45 30.68
	21337.00	88.59	180.10	11806.51	9670.89	-9651.06	620.46	2.19	452012.24	719053.28	N 32 14 28.86	W 103 45 30.70
	21527.00	89.73	180.10	11809.30	9860.50	-9841.03	620.13	0.60	451822.28	719052.95	N 32 14 26.98	W 103 45 30.72
	21716.00	90.42	180.27	11809.05	10049.13	-10030.03	619.52	0.38	451633.29	719052.34	N 32 14 25.11	W 103 45 30.74
330' FSL Crossed	21808.00	89.78	179.81	11808.89	10140.96	-10122.03	619.46	0.86	451541.30	719052.27	N 32 14 24.20	W 103 45 30.74
	21811.00	89.76	179.79	11808.90	10143.95	-10125.03	619.47	0.86	451538.30	719052.29	N 32 14 24.17	W 103 45 30.74
Final MWD	21857.00	90.83	181.57	11808.66	10189.83	-10171.02	618.92	4.51	451492.31	719051.74	N 32 14 23.72	W 103 45 30.75
Proj to TD	21902.00	90.83	181.57	11808.01	10234.66	-10216.00	617.69	0.00	451447.33	719050.51	N 32 14 23.27	W 103 45 30.77

Survey Type: Def Survey

Survey Error Model: ISCWSA Rev 0 *** 3-D 95.000% Confidence 2.7955 sigma
Survey Program:

Description	Part	MD From (ft)	MD To (ft)	EOU Freq (ft)	Hole Size	Casing Diameter (in)	Survey Tool Type	Borehole / Survey
	1	0.000	30.000	1/98.425	30.000	30.000	NAL_NSG+MSHOT-Depth Only	Original Borehole / Oxy Platinum MDP1 34-3 Federal Com 176H Gyro+MWD 0-21902MD
	1	30.000	30.000	Act Stns	30.000	30.000	NAL_NSG+MSHOT-Depth Only	Original Borehole / Oxy Platinum MDP1 34-3 Federal Com 176H Gyro+MWD 0-21902MD
	1	30.000	658.000	Act Stns	30.000	30.000	NAL_NSG+MSHOT	Original Borehole / Oxy Platinum MDP1 34-3 Federal Com 176H
	1	658.000	21902.000	Act Stns	30.000	30.000	NAL_MWD_IFR1+MS	Original Borehole / Oxy Platinum MDP1 34-3 Federal Com 176H



OXY



Borehole:	Well:	Field:	Structure:
Original Borehole	Oxy Platinum MDP1 34-3 Federal Com 176H	NM Eddy County (NAD 83)	Oxy Platinum MDP1 34-3 Federal Com 176H

Gravity & Magnetic Parameters

Model: IFR1 Dip: 59.947° Date: 22-Jul-2019
 MagDec: 6.759° FS: 47958.1nT Gravity FS: 998.446mgn (9.80665 Based)

Surface Location

NAD83 New Mexico State Plane, Eastern Zone, US Feet


Lat: N 32 16 4.39 Northing: 461662.75FIUS Grid Conv: 0.3059°
 Lon: W 103 45 37.32 Easting: 718432.85FIUS Scale Fact: 0.99994501

Miscellaneous


Well Number: MDP1 34-3 Federal Com
 Slot: MDP1 34-3 Federal Com
 Plan: Oxy Platinum MDP1 34-3 Federal Com 176H Gyro+MWD 0-21902MD

Critical Points

Critical Point	MD	INCL	AZIM	TVD	VSEC	N(+)/S(-)	E(+)/W(-)	DLS
WRP	0.00	0.00	176.59	0.00	0.00	0.00	0.00	
SHL	30.00	0.00	0.00	30.00	0.00	0.00	0.00	
Last Gyro	685.00	1.07	245.92	684.96	2.51	-2.77	-4.26	0.15
KOP Actual	11338.00	12.93	97.08	11287.33	10.09	16.18	439.11	1.86
100' FNL Crossed	11389.00	15.60	113.82	11336.78	14.27	12.71	451.06	9.59
Wolfcamp Intersection	11674.80	39.04	161.07	11588.00	127.60	-96.97	515.37	3.33
330' FSL Crossed	21808.00	89.78	179.81	11808.89	10140.96	-10122.03	619.46	0.86
Final MWD	21857.00	90.83	181.57	11808.66	10189.83	-10171.02	618.92	4.51
Proj to TD	21902.00	90.83	181.57	11808.01	10234.66	-10216.00	617.69	0.00

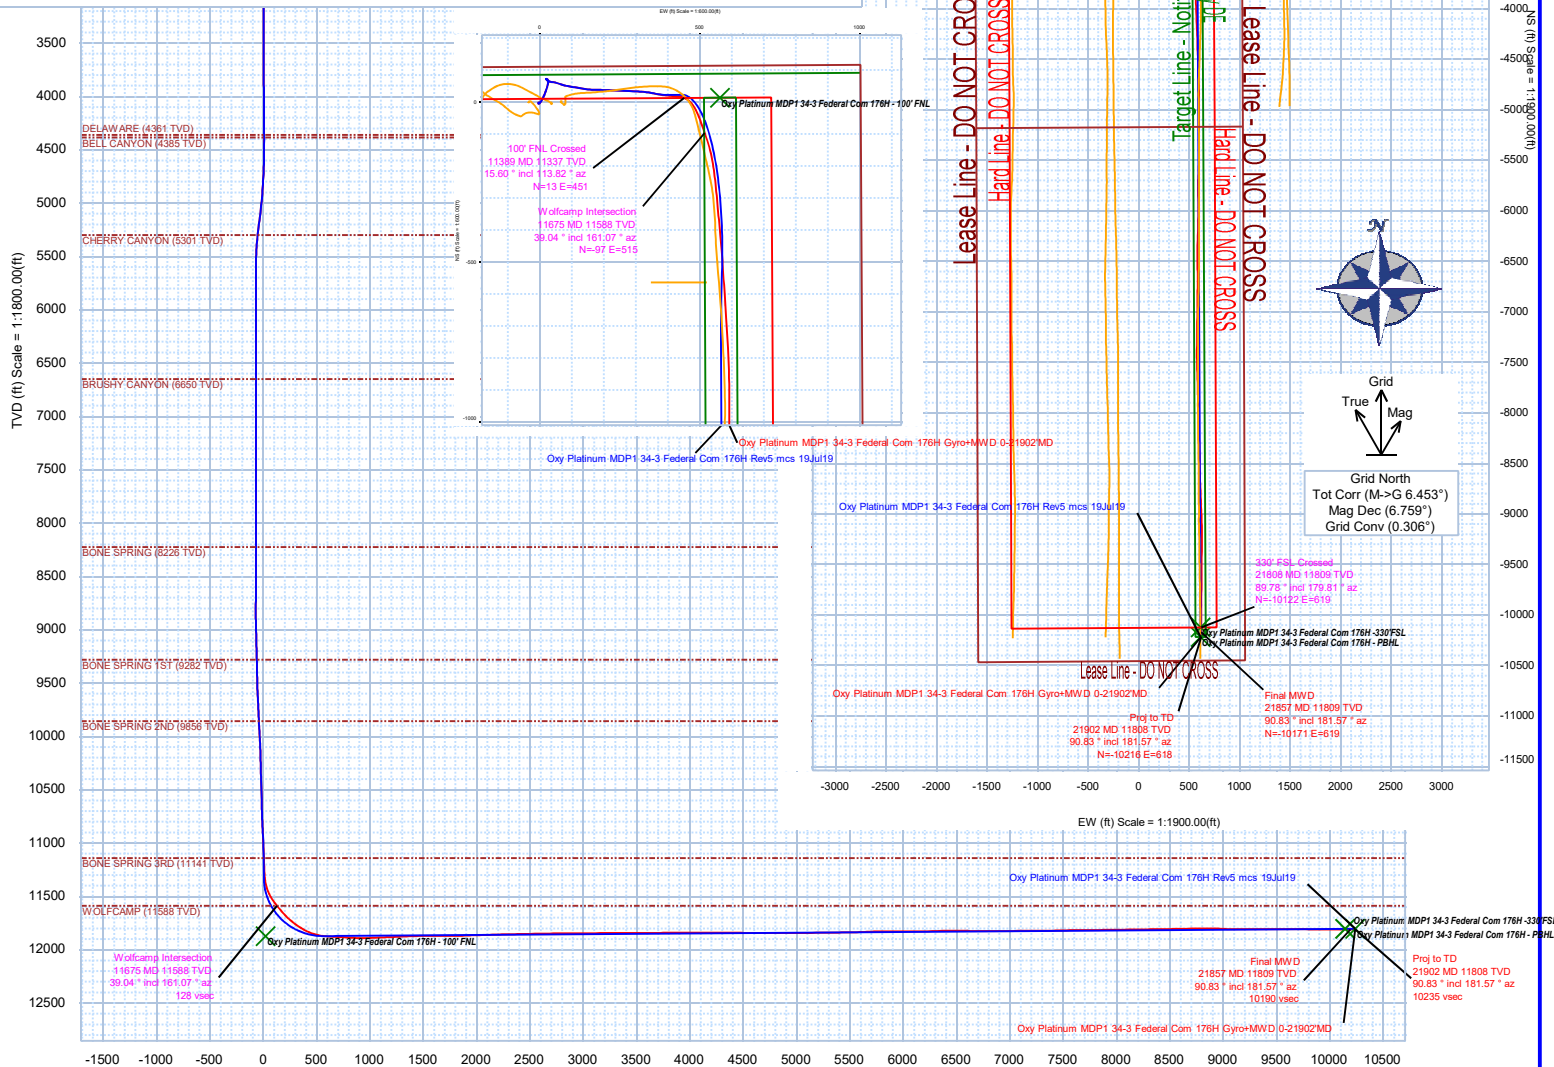

OXY USA INC
Platinum MDP1 34-3 Fed Com 176H
API No. 30-015-45233

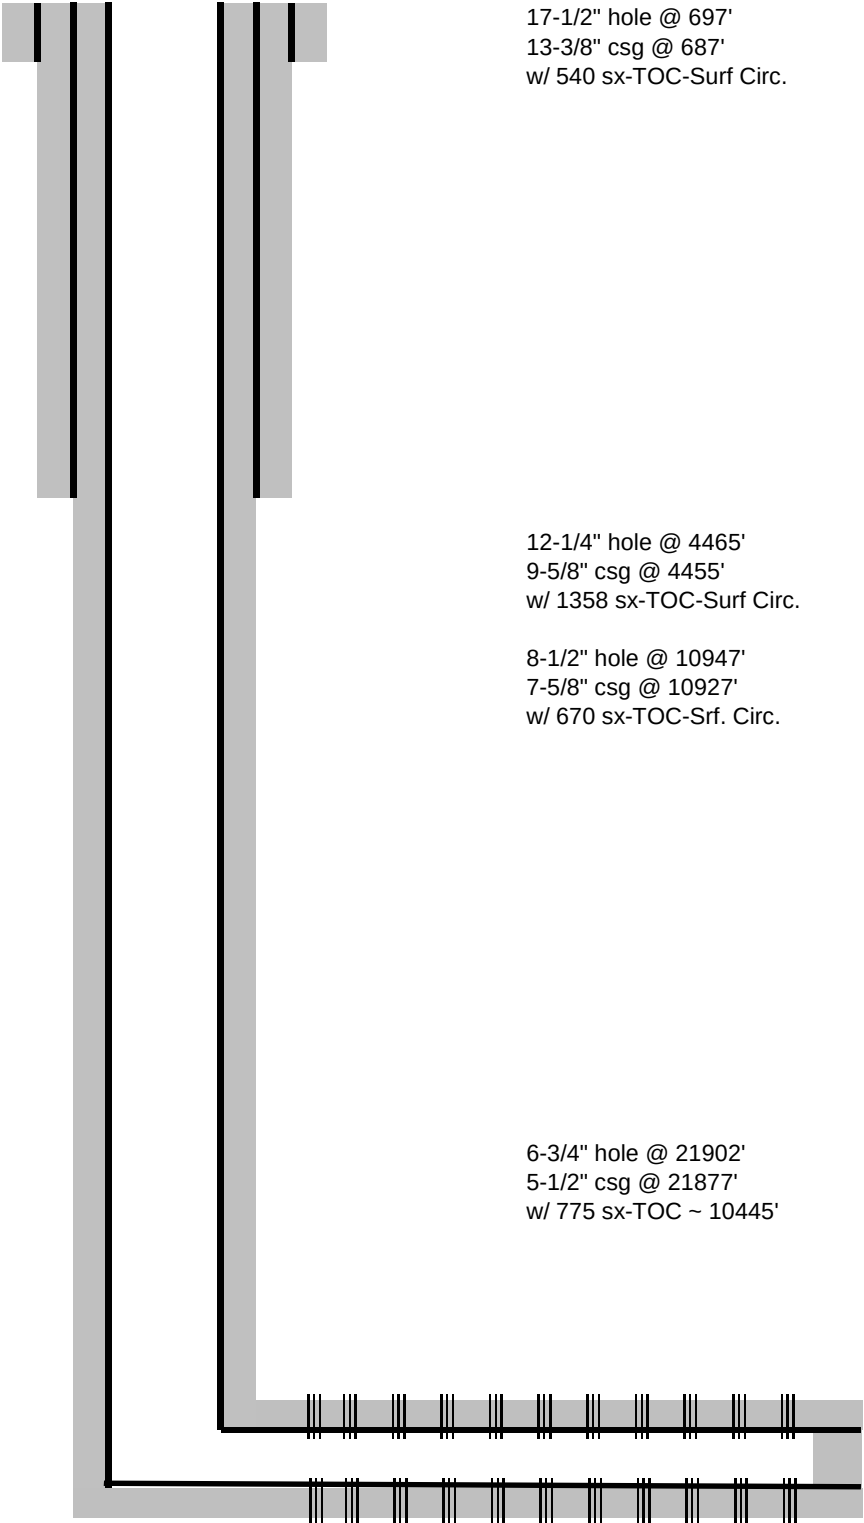

Perfs @ 11935'-21795' TD- 21902' M 11675' V

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENTEMNRD-OC D ARTESIA
REC'D: 6/25/2020FORM APPROVED
OMB No. 1004-0137
Expires: July 31, 2010

WELL COMPLETION OR RECOMPLETION REPORT AND LOG

1a. Type of Well ☒ Oil Well ☐ Gas Well ☐ Dry ☐ Other				5. Lease Serial No. NMNM43744	
b. Type of Completion ☒ New Well ☐ Work Over ☐ Deepen ☐ Plug Back ☐ Diff. Resvr. Other _____				6. If Indian, Allottee or Tribe Name	
2. Name of Operator OXY USA INC.				8. Lease Name and Well No. PLATINUM MDP1 34-3 FEDERAL COM 176H	
3. Address P.O. BOX 50250 MIDLAND, TX 79710				9. API Well No. 30-015-45233	
4. Location of Well (Report location clearly and in accordance with Federal requirements)* Sec 34 T23S R31E Mer NMP At surface NENE 110FNL 1003FEL 32.267886 N Lat, 103.760368 W Lon Sec 34 T23S R31E Mer NMP At top prod interval reported below NENE 532FNL 452FEL 32.267110 N Lat, 103.758590 W Lon Sec 3 T24S R31E Mer NMP At total depth SESE 238FSL 386FEL 32.239640 N Lat, 103.758570 W Lon				10. Field and Pool, or Exploratory PURPLE SAGE WOLFCAMP	
14. Date Spudded 05/28/2019				15. Date T.D. Reached 08/01/2019	
16. Date Completed ☐ D & A ☒ Ready to Prod. 09/19/2019				17. Elevations (DF, KB, RT, GL)* 3442 GL	
18. Total Depth: MD 21902 TVD 11808		19. Plug Back T.D.: MD 21830 TVD 11809		20. Depth Bridge Plug Set: MD TVD	
21. Type Electric & Other Mechanical Logs Run (Submit copy of each) GAMMA RAY				22. Was well cored? ☒ No ☐ Yes (Submit analysis) Was DST run? ☒ No ☐ Yes (Submit analysis) Directional Survey? ☐ No ☒ Yes (Submit analysis)	

23. Casing and Liner Record (Report all strings set in well)

Hole Size	Size/Grade	Wt. (#/ft.)	Top (MD)	Bottom (MD)	Stage Cementer Depth	No. of Sk. & Type of Cement	Slurry Vol. (BBL)	Cement Top*	Amount Pulled
17.500	13.375 J55	54.5	0	687		540	130	0	
12.250	9.625 HCL80	40.0	0	4455		1358	400	0	
8.500	7.625 HCL80	26.4	0	10927		670	204	0	
6.750	5.500 P110	20.0	0	21877		775	207	10427	

24. Tubing Record

Size	Depth Set (MD)	Packer Depth (MD)	Size	Depth Set (MD)	Packer Depth (MD)	Size	Depth Set (MD)	Packer Depth (MD)
2.375	11936							

25. Producing Intervals

Formation	Top	Bottom	Perforated Interval	Size	No. Holes	Perf. Status
A) WOLFCAMP	11935	21796	11935 TO 21796	0.370	982	ACTIVE
B)						
C)						
D)						

26. Perforation Record

27. Acid, Fracture, Treatment, Cement Squeeze, Etc.

Depth Interval	Amount and Type of Material
11935 TO 21796	24822G 7.5% HCL ACID + 12446868G SLICK WATER W/ 20673013# SAND

28. Production - Interval A

Date First Produced	Test Date	Hours Tested	Test Production	Oil BBL	Gas MCF	Water BBL	Oil Gravity Corr. API	Gas Gravity	Production Method
09/25/2019	10/03/2019	24		3646.0	9489.0	5894.0			GAS LIFT
Choke Size	Tbg. Press. Flwg.	Csg. Press.	24 Hr. Rate	Oil BBL	Gas MCF	Water BBL	Gas:Oil Ratio	Well Status	
42	SI	1680.0		3646	9489	5894	2603	POW	

28a. Production - Interval B

Date First Produced	Test Date	Hours Tested	Test Production	Oil BBL	Gas MCF	Water BBL	Oil Gravity Corr. API	Gas Gravity	Production Method
Choke Size	Tbg. Press. Flwg.	Csg. Press.	24 Hr. Rate	Oil BBL	Gas MCF	Water BBL	Gas:Oil Ratio	Well Status	
SI									

(See Instructions and spaces for additional data on reverse side)

ELECTRONIC SUBMISSION #520195 VERIFIED BY THE BLM WELL INFORMATION SYSTEM

** OPERATOR-SUBMITTED ** OPERATOR-SUBMITTED ** OPERATOR-SUBMITTED **

28b. Production - Interval C									
Date First Produced	Test Date	Hours Tested	Test Production →	Oil BBL	Gas MCF	Water BBL	Oil Gravity Corr. API	Gas Gravity	Production Method
Choke Size	Tbg. Press. Flwg. SI	Csg. Press.	24 Hr. Rate →	Oil BBL	Gas MCF	Water BBL	Gas:Oil Ratio	Well Status	

28c. Production - Interval D									
Date First Produced	Test Date	Hours Tested	Test Production →	Oil BBL	Gas MCF	Water BBL	Oil Gravity Corr. API	Gas Gravity	Production Method
Choke Size	Tbg. Press. Flwg. SI	Csg. Press.	24 Hr. Rate →	Oil BBL	Gas MCF	Water BBL	Gas:Oil Ratio	Well Status	

29. Disposition of Gas(*Sold, used for fuel, vented, etc.*)
SOLD

30. Summary of Porous Zones (Include Aquifers): Show all important zones of porosity and contents thereof: Cored intervals and all drill-stem tests, including depth interval tested, cushion used, time tool open, flowing and shut-in pressures and recoveries.	31. Formation (Log) Markers
---	------------------------------------

Formation	Top	Bottom	Descriptions, Contents, etc.	Name	Top
					Meas. Depth
BELL CANYON	4372	5280	OIL, GAS, WATER	RUSTLER	668
CHERRY CANYON	5281	6479	OIL, GAS, WATER	SALADO	986
BRUSHY CANYON	6480	8208	OIL, GAS, WATER	CASTILE	2856
BONE SPRING	8209	8973	OIL, GAS, WATER	LAMAR	4352
1ST BONE SPRING	8974	9548	OIL, GAS, WATER	BELL CANYON	4372
2ND BONE SPRING	9549	10390	OIL, GAS, WATER	CHERRY CANYON	5281
3RD BONE SPRING	10391	11691	OIL, GAS, WATER	BRUSHY CANYON	6480
WOLFCAMP	11692		OIL, GAS, WATER	BONE SPRING	8209

32. Additional remarks (include plugging procedure):
52. FORMATION (LOG) MARKERS CONTD.

1ST BONE SPRING - 8974'M
 2ND BONE SPRING - 9549'M
 3RD BONE SPRING - 10391'M
 WOLFCAMP - 11692'M

 LOGS WERE MAILED 1/27/20.

33. Circle enclosed attachments:

1. Electrical/Mechanical Logs (1 full set req'd.)	2. Geologic Report	3. DST Report	4. Directional Survey
5. Sundry Notice for plugging and cement verification	6. Core Analysis	7 Other:	

34. I hereby certify that the foregoing and attached information is complete and correct as determined from all available records (see attached instructions):
Electronic Submission #520195 Verified by the BLM Well Information System.
For OXY USA INC., sent to the Carlsbad

Name (*please print*) JANA MENDIOLA Title REGULATORY SPECIALIST

Signature _____ (Electronic Submission) Date 06/25/2020

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

**** ORIGINAL ** ORIGINAL ** ORIGINAL ** ORIGINAL ** ORIGINAL ** ORIGINAL ** ORIGINAL ****

Additional data for transaction #520195 that would not fit on the form

32. Additional remarks, continued

THIS AMENDED COMPLETION REPORT REPLACES PREVIOUS COPY FILED ON 1/29/2020 (EC TRANSACTION #501352)

THE FOLLOWING CHANGES WERE MADE:

1. CORRECTED PLUG BACK MEASURED & VERTICAL DEPTH ON ITEM 19.
2. CORRECTED 7.625" CASING GRADE ON ITEM 23.
3. CORRECTED 5.5" CASING CEMENT TOP ON ITEM 23.
4. CORRECTED FRAC AMOUNT ON ITEM 27.