

Submit 1 Copy To Appropriate District
Office
District I - (575) 393-6161
1625 N. French Dr., Hobbs, NM 88240
District II - (575) 748-1283
811 S. First St., Artesia, NM 88210
District III - (505) 334-6178
1000 Rio Brazos Rd., Aztec, NM 87410
District IV - (505) 476-3460
1220 S. St. Francis Dr., Santa Fe, NM
87505

State of New Mexico
Energy, Minerals and Natural Resources

OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

Form C-103
Revised August 1, 2011


SUNDRY NOTICES AND REPORTS ON WELLS (DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)		WELL API NO. 30-015-02240
1. Type of Well: Oil Well ☒ Gas Well ☐ Other ☐		5. Indicate Type of Lease STATE ☒ FEE ☐
2. Name of Operator Stephens & Johnson Operating Co		6. State Oil & Gas Lease No. State 648
3. Address of Operator P O Box 2249, Wichita Falls, TX 76307		7. Lease Name or Unit Agreement Name: East Millman Unit
4. Well Location Unit Letter <u>J</u> : <u>1980</u> feet from the <u>South</u> line and <u>1980</u> feet from the <u>East</u> line Section <u>14</u> Township <u>19S</u> Range <u>28E</u> NMPM County <u>Eddy</u>		8. Well Number 181
11. Elevation (Show whether DR, RKB, RT, GR, etc.) 3406' DF; 3404' GR		9. OGRID Number 019958
		10. Pool name or Wildcat Millman-Yates-SR-QN-GB-SA East

12. Check Appropriate Box to Indicate Nature of Notice, Report, or Other Data

NOTICE OF INTENTION TO:		SUBSEQUENT REPORT OF:	
PERFORM REMEDIAL WORK ☐	PLUG AND ABANDON ☐	REMEDIAL WORK ☐	ALTERING CASING ☐
TEMPORARILY ABANDON ☐	CHANGE PLANS ☐	COMMENCE DRILLING OPNS. ☐	P AND A ☒
PULL OR ALTER CASING ☐	MULTIPLE COMPL ☐	CASING/CEMENT JOB ☐	
DOWNHOLE COMMINGLE ☐			
OTHER: ☐		OTHER: ☐	

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 19.15.7.14 NMAC.. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

See Attached.



Approved for plugging of well bore only.
Liability under bond is retained pending receipt
of C-103 (Subsequent Report of Well Plugging)
which may be found at OCD Web Page under
Forms. www.cmrnd.state.nm.us/oed.

Spud Date:

Rig Release Date:

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE William M. Kincaid TITLE Petroleum Engineer DATE 1/13/12
mkincaid@sjoc.net
Type or print name William M. Kincaid E-mail address: mkincaid@sjoc.net PHONE 940-723-2166

For State Use Only

APPROVED BY [Signature] DATE 3/22/2012
Conditions of Approval (if any):

Approved for plugging of well bore only.
Liability under bond is retained pending receipt
of C-103 (Subsequent Report of Well Plugging)
which may be found at OCD Web Page under
Forms. www.cmrnd.state.nm.us/oed.

Page 2 (C-103)

STEPHENS & JOHNSON OPERATING CO.
EAST MILLMAN UNIT WELL NO. 181
API NO. 30-015-02240
EDDY COUNTY, NEW MEXICO

Plug and Abandonment Procedure

12/1/11 MIRU. RIH w/wireline, set CIBP @ 1700'.
12/2/11 RIH w/jet cutter, cut 4 1/2" csg @ 1650'.
12/7/11 Lay down 43 jts 4 1/2" csg. RIH w/tbg, tag CIBP @
1700'. Circ well w/50 bbls MLF. Pump 25 sx cmt on
top of CIBP and 4 1/2" csg stub. WOC.
12/8/11 RIH w/tbg and tag cmt plug @ 1300'. POOH w/tbg. 7"
csg scaled up and in bad shape. Try to run 6 1/8" bit
in 7" csg. Could not run bit in 7". Talk to Phil
Hawkins/OCD. OK to perf 7" w/25 holes @ 850' and
gravity squeeze. Perf 25 holes @ 850'. Pump 25 sx
cmt @ 850'. POOH w/tbg. WOC.
12/9/11 RIH w/tbg and tag cmt plug @ 700'. POOH w/tbg. Perf
7" @ 600' w/25 holes for gravity squeeze. RIH w/tbg
to 700', pump 35 sx cmt. WOC. RIH w/tbg and tag cmt
plug @ 500'. POOH w/tbg. RIH w/wireline and perf 7"
@ 410' w/25 holes for gravity squeeze. RIH w/tbg to
460' and pump 40 sx cmt plug. POOH w/tbg. WOC.
12/12/11 RIH w/tbg and tag cmt plug @ 355'. Pump 25 sx cmt on
top of plug @ 355' to bring cmt up to 240'. POOH
w/tbg. RIH w/wireline and perf 7" @ 60' w/25 holes.
RIH w/tbg to 100' and pump 40 sx cmt. Cmt circulating
back to surface both inside and outside 7" csg. POOH
w/tbg. WOC.
12/13/11 RIH w/tbg and tag cmt @ 45'. Pump 20 sx cmt and
filled 7" csg back to surface both inside and outside
of 7" csg. Hole staying full. Well is P&A. RDMO.


East Millman Unit Millman Yates-SR-QN-GB-SA, East December 13, 2011
WELL 181 FIELD DATE

— Plug and Abandonment —

KB ELEVATION _____ OF ELEVATION 3406' GL ELEVATION 3404'

PERMANENT WELL BORE DATA

DATA ON THIS COMPLETION

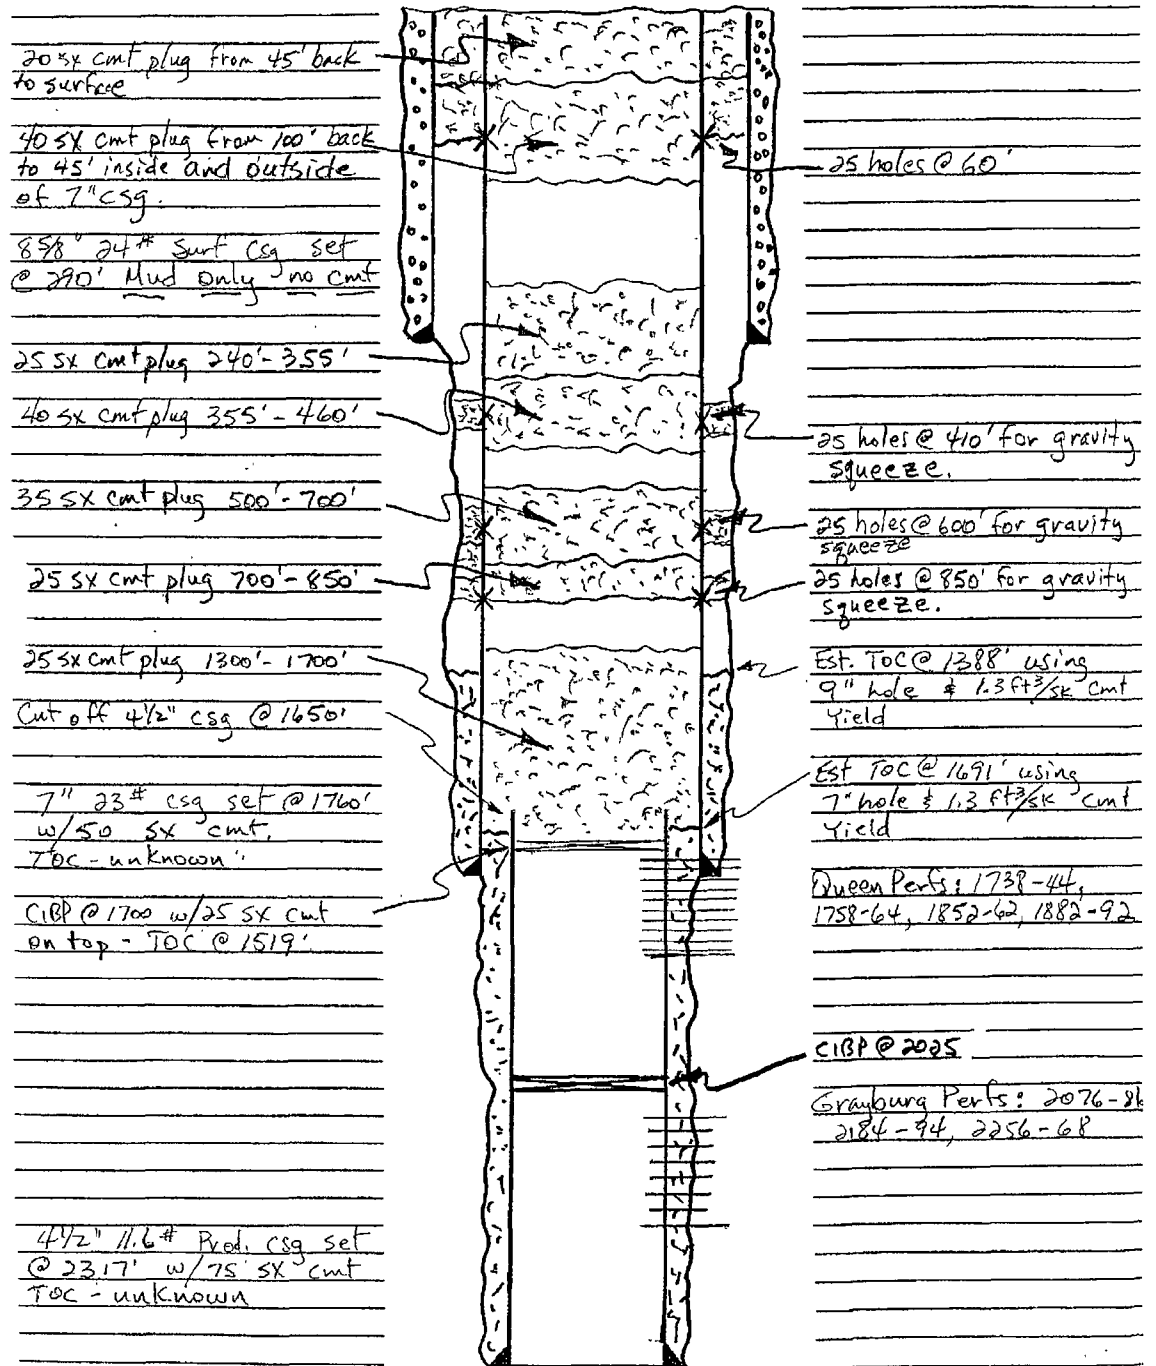

PBTD - 2316'
TD - 2317'