


Occidental Oil & Gas Corp – Permian Primary – North NM/Terrell RMT

Well: Piglet 21 State #28		API: 30-015-41175	
State: New Mexico	County: Eddy	T17S R28E, Sec 21	1511' FSL & 988' FWL
Field: Empire	TD: 4,973'	PBTD: 4,923.42'	KB: 3,633' ASL
Casing Size:	Grade/Weight:	Depth:	Cement:
8-5/8"	J-55 STC / 24#	437'	210 sx, 67sx circ'd to surf
5-1/2"	L-80 BTC / 17#	4,954.36'	860 sx, 277sx circ'd to surf

Surf Csg: 8-5/8" 24# J-55 STC
Cement: 210 sx, 67sx circ'd to surf


Surf Csg @ 437'



Perforation Intervals

Stage 5b: 3,500' – 3,506.13'
Stage 5a: 3,558' – 3,566.13'
Stage 4b: 3,630' – 3,636.13'
Stage 4a: 3,684' – 3,692.13'
Stage 3b: 3,996' – 4,002.13'
Stage 3a: 4,114' – 4,122.13'
Stage 2b: 4,290' – 4,296.13'
Stage 2a: 4,428' – 4,436.13'
Stage 1b: 4,544' – 4,550.13'
Stage 1a: 4,660' – 4,668.13'

Prod Csg: 5-1/2" 17# L-80 BTC
Cement: 860 sx, 277sx circ'd to surf

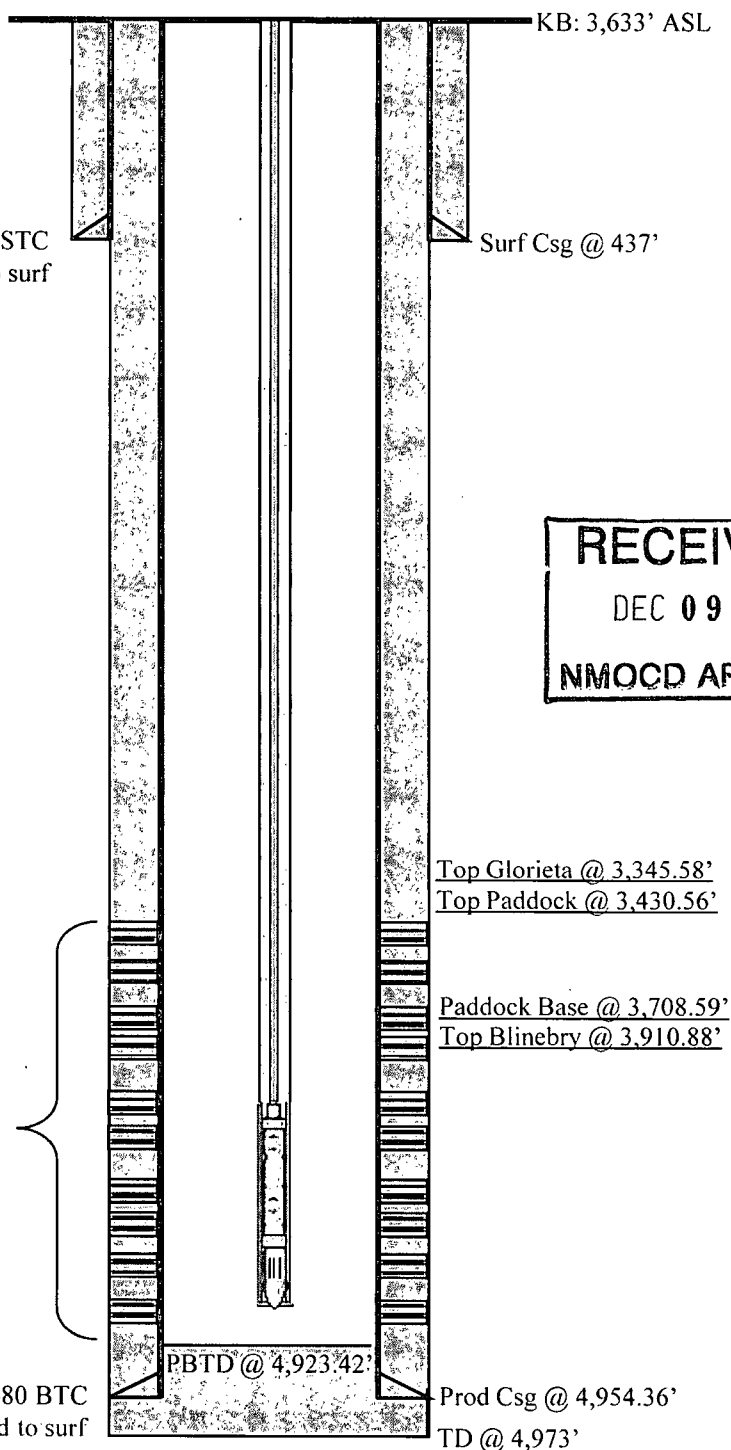

Top Glorieta @ 3,345.58'
Top Paddock @ 3,430.56'

Paddock Base @ 3,708.59'
Top Blinebry @ 3,910.88'

PBTD @ 4,923.42'

Prod Csg @ 4,954.36'
TD @ 4,973'