

Oil Cons.
N.M. DIV-Dist. 2
1301 W. Grand Avenue
Artesia, NM 88210

5



UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
OMB No. 1004-0135
Expires January 31, 2004

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or to re-enter an abandoned well. Use Form 3160-3 (APD) for such proposals.

SUBMIT IN TRIPLICATE - Other instructions on reverse side

1. Type of Well
☐ Oil Well ☒ Gas Well ☐ Other
2. Name of Operator
H.L. Brown Operating L.L.C.

3a. Address **300 W. Louisiana
Midland, Texas 79702**

3b. Phone No. (include area code)
432-688-3726

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)
**660' FEL & 330' FSL
Unit P, Sec 15, T-17-S, R-29-E**

5. Lease Serial No.
NMLC 028731A
6. If Indian, Allottee or Tribe Name
7. If Unit or CA/Agreement, Name and/or No.
8. Well Name and No.
Dodd Federal #1
9. API Well No.
30-015-21041
10. Field and Pool, or Exploratory Area
Grayburg Morrow (gas)
11. County or Parish, State
Eddy

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION			
<input type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input checked="" type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input type="checkbox"/> Other
	<input type="checkbox"/> Change Plans	<input checked="" type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon	
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	

13. Describe Proposed or Completed Operation (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recompleat horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompleat in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.)

04/30 - 05/02/03 Notified BLM. MIRU Triple N rig #23 and plugging equipment. SDFN.

05/05/03 Notified BLM. RIH w/ tbg to 10,554', tagged blanking plug. Pumped 25 sx C cmt 10,509 - 10,409'. Perforated csg @ 9,100'. Pumped 60 sx C cmt @ 9,100'. PUH to 8,100'. SDFN.

05/06/03 Notified BLM, Homer Saenz. Perforated csg @ 6,271'. Pumped 60 sx C cmt 6,271 - 6,171'.

05/07/03 Notified BLM, Homer Saenz. POOH w/ 130 1/2 jts 4 1/2" csg. Pumped 60 sx C cmt 4,259 - 4,159'. WOC and tagged cmt @ 4,148'. Pumped 40 sx C cmt @ 3,650'. POOH. SDFN.

05/08/03 BLM on location, Homer Saenz. Tagged cmt @ 3,538'. Pumped 30 sx C cmt 1,100 - 990'. Perforated csg @ 440' and sqz'd 55 sx C cmt. Tagged cmt @ 357'. Pumped 10 sx C cmt 50' to surface.

05/15/03 Cut off wellhead, installed marker. Cut off anchors and leveled pit.

14. I hereby certify that the foregoing is true and correct
Name (Printed/Typed)

James F. Newman, P.E.

Triple N Services, Inc. (432)-687-1994
Title **P.O. Box 10451, Midland, TX 79702**

Signature **R. McNaughton**

Date **5/19/03**


Approved as to plugging of the well bore.
Liability under bond is retained until
surface restoration is completed.

Approved by

Conditions of approval, if any, attached. Approval of this notice does not warrant or certify that the applicant has legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Title

Office

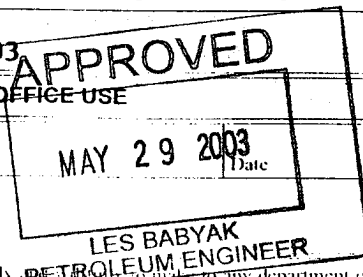

Falsification of this form, or any other form, or any other statement or representation made to any department or agency of the United States, is a crime under 18 U.S.C. Section 1001 and 18 U.S.C. Section 1012.

H.L. Brown Operating, L.L.C.

Dodd Federal #1

330' FSL & 660' FEL, Unit P, Sec 15, T-17-S, R-29-E, Eddy Co, NM

Field: Grayburg Morrow

API # 30-015-21041

Elev. 3580', KB = 3592'

P&A: 5-13-03

Spud: 1/9/1974

Completed: 4/4/1979

11-3/4", 42# @ 390'
600 sx, circulated
15" hole


Holes in casing: 2467' - 2479'
SQZD w/ 750 sx, TOC @ 940'

8-5/8", 24/32# @ 3600'
300 sx, TOC @ 2400' by T.S.
11" hole

4-1/2", 13.5/11.6#, N-80 @ 10,864'
500 sx, TOC @ 8450' by temp.
7-7/8" Hole

13.5# - surface to 3234'
11.6# - 3235' to 10,201'
13.5# - 10,202' to 10,864'

TD @ 10,864'

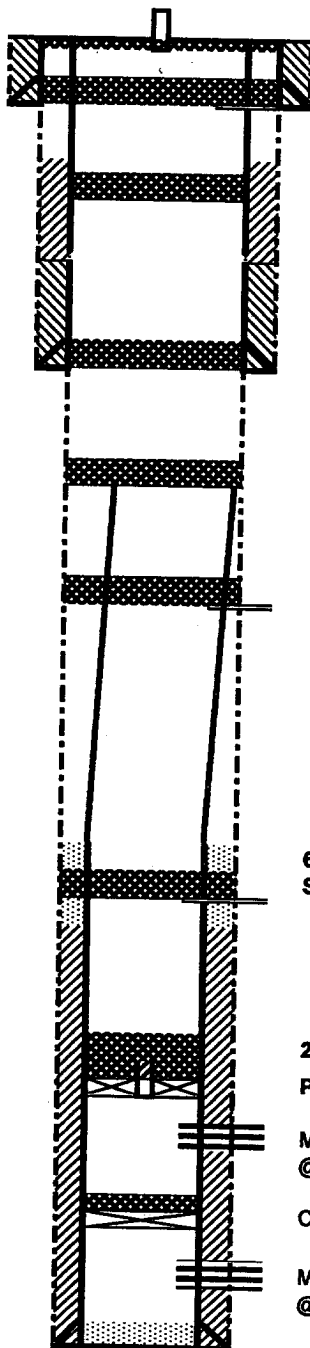

10 sx plug at surface, 3 sx in annulus

55 sx across shoe: 440' - 357', tagged
SQZ perms @ 440'

30 sx plug : 1100' - 1000'

40 sx plug across shoe: 3650' - 3538', tagged

60 sx plug on casing stub, 4264' - 4158', tagged
4-1/2" casing parted at 4209', POH and LD

60 sx "C" plug: 6271' - 6121'.
SQZ perms at 6271'

60 sx "C" plug: 9,100' - 8,950'
SQZ perms at 9100'

25 sx "C" plug: 10,521' - 10,200'

Packer @ 10,521', 1.87" blanking plug in on/off tool

Morrow Perfs: 10,739' - 10,746'
@ 1 SPF, 1500 gals 7.5%, 10/12.5 frac w/ CO₂

CIBP @ 10,760' w/ 10' cement (plugback 6-01-1980)

Morrow Perfs: 10,770' - 10,790'
@ 4 SPF, 80 holes, 3000 gals 7.5% MS acid