

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

OCD Artesia

FORM APPROVED
OMB NO. 1004-0137
Expires: January 31, 2018

SUNDRY NOTICES AND REPORTS ON WELLS
Do not use this form for proposals to drill or to re-enter an abandoned well. Use form 3160-3 (APD) for such proposals.

5. Lease Serial No.
NMNM2747

6. If Indian, Allottee or Tribe Name

SUBMIT IN TRIPLICATE - Other instructions on page 2

7. If Unit or CA/Agreement, Name and/or No.

1. Type of Well <input type="checkbox"/> Oil Well <input type="checkbox"/> Gas Well <input checked="" type="checkbox"/> Other: INJECTION		8. Well Name and No. JACKSON B 4
2. Name of Operator EOG Y RESOURCES INC Contact: TINA HUERTA E-Mail: tina_huerta@eogresources.com		9. API Well No. 30-015-04036-00-S1
3a. Address 104 S 4TH STREET ARTESIA, NM 88210	3b. Phone No. (include area code) Ph: 575-748-4168	10. Field and Pool or Exploratory Area SQUARE LAKE
4. Location of Well (Footage, Sec., T., R., M., or Survey Description) Sec 1 T17S R30E NWNW 660FNL 660FWL		11. County or Parish, State EDDY COUNTY, NM

12. CHECK THE APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION			
<input checked="" type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Hydraulic Fracturing	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input type="checkbox"/> Other
	<input type="checkbox"/> Change Plans	<input checked="" type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon	
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	

13. Describe Proposed or Completed Operation: Clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomplate horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports must be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recomplate in a new interval, a Form 3160-4 must be filed once testing has been completed. Final Abandonment Notices must be filed only after all requirements, including reclamation, have been completed and the operator has determined that the site is ready for final inspection.

EOG Resources, Inc. plans to plug and abandon this well as follows:

GC 8/22/19
Accepted for record - NMOCD

- MIRU all safety equipment as needed. POOH with production equipment.
- Make a GR/JB run to 2780 ft.
- Set a 4-1/2 inch CIBP at 2770 ft. Spot 25 sx Class C cement on top of CIBP to 2420 ft. WOC and tag. Covers open perforations.
- Load hole with plugging mud. Perforate at 1350 ft. Attempt to establish an injection rate. Squeeze a 30 sx Class C in/out cement plug from 1350 ft - 1230 ft. WOC and tag. Covers B, Salt
- 570' - Perforate at 550 ft. Attempt to establish an injection rate. Squeeze a 40 sx Class C in/out cement plug from 550 ft up to surface. Covers casing shoe and surface.
- Cut off wellhead and install dry hole marker. Clean location as per regulated.

**SEE ATTACHED FOR
CONDITIONS OF APPROVAL**

Below ground level dry hole marker required

NM OIL CONSERVATION
ARTESIA DISTRICT

14. I hereby certify that the foregoing is true and correct.

Electronic Submission #477342 verified by the BLM Well Information System
For EOG Y RESOURCES INC, sent to the Carlsbad
Committed to AFMSS for processing by PRISCILLA PEREZ on 08/09/2019 (19PP2949SE)

Name (Printed/Typed) TINA HUERTA	Title REGULATORY SPECIALIST
Signature (Electronic Submission)	Date 08/09/2019

AUG 21 2019

RECEIVED

THIS SPACE FOR FEDERAL OR STATE OFFICE USE

Approved By <i>James R. Ames</i>	Title <i>SACT</i>	Date <i>8-10-19</i>
Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.		Office <i>CFD</i>

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Instructions on page 2)

**** BLM REVISED ** BLM REVISED ** BLM REVISED ** BLM REVISED ** BLM REVISED ****


82

Jackson B #4

Sec-TWN-RNG: 1-17S-30E
FOOTAGES: 660' FNL & 660' FWL

API: 30-015-04036
GL:
KB:

COMMENTS

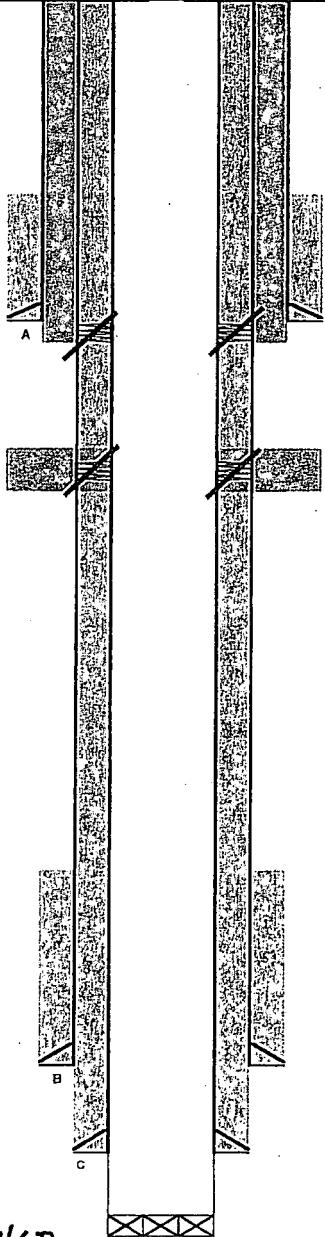

perfd & squeezed w/ 800sx

520

2705

2795

3450

TD: MD

CASING DETAIL

#	HOLE SIZE	CSG SIZE	WGHT	GRADE	Top	Bottom	Sx Cmt	Circ/TOC	TOC Method
A	?	8 1/4	?	?	0	520	50	?	
B	?	7	?	?	0	2705	100	1270'	
C	?	4 1/2	?	?	0	2795	500	Circ	

FORMATION TOPS

FORMATION	TOP
7.50 ft	500
B.Salt	1215
	1300

Tbg

2 3/8" plastic lined w/ Baker tension packer set @ 2714'. Packer chemical circulated in the annulus

Had to dig an emergency backflow pit in 1983 for workover operations to fix a tbg or packer leak.

ADDITIONAL DETAIL

1942 - Significant water flow experienced during drilling. Produced from open hole below 7"
 1979 - water flow up 7" X 8 1/4" annulus. Set 4 1/2" csg to remediate problem. Producing from open hole below 4 1/2"
 1979 - converted to injection well
 1986 - small water flow to surface between 7" X 8 1/4"
 Water Flow remediation:
 perfd 4 1/2 & 7" @ 990'. Could not circ up 7" X 8 1/4" annulus. Squeezed perfs w/ 500sx
 perfd 4 1/2 & 7" @ 540'. Circ cmt up 7" X 8 1/4" annulus. Csg still leaking @ 65 BWPD.
 squeezed perfs again @ 990' with 400sx

Prepared by: JDE

Date: 8/7/2019


Jackson B #4

Sec-TWN-RNG: 1-17S-30E
 FOOTAGES: 660' FNL & 660' FWL
 API: 30-015-04036
 GL:
 KB:

COMMENTS

1986
 Circ. cmt. behind 7" to Surface

1986
 perf'd & squeezed w/ 800sx

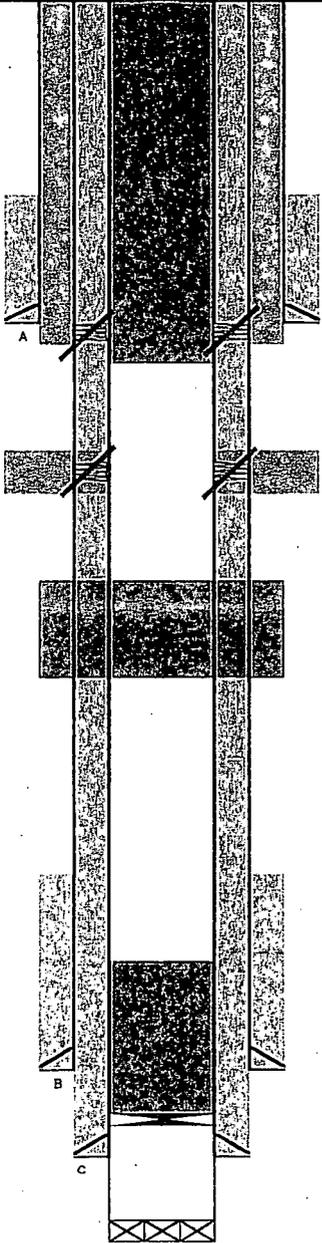

TD: MD

CASING DETAIL									
#	HOLE SIZE	CSG SIZE	WGHT	GRADE	Top	Bottom	Sx Cmt	Circ/TOC	TOC Method
A	?	8 1/4	?	?	0	520	50	?	
B	?	7	?	?	0	2,705	100	1270'	
C	?	4 1/2	?	?	0	2,795	500	Circ	

FORMATION TOPS	
FORMATION	TOP
B.Salt	1300'

Tbg

2 3/8" plastic lined w/ Baker tenson packer set @ 2,714'. Packer chemical circulated in the annulus

Had to dig an emergency backflow pit in 1993 for workover operations to fix a tbg or packer leak.

Plug Detail						
#	SX	CMT CLASS	TOP	BTM	DESCRIPTION	
1	25	C	2,420	2,770	CIBP w/ 25sx cmt	
2	30	C	1,230	1,350	Perf 4 1/2" & 7" @ 1350' and squeeze	
3	40	C	0	550	Perf @ 550'. Attempt to est. inj. Rate, Circ plug @ 550'-Sur.	

ADDITIONAL DETAIL

1942 - Significant water flow experienced during drilling. Produced from open hole below 7"

1978 - water flow up 7" X 8 1/4" annulus. Set 4 1/2" csg to remediate problem. Producing from open hole below 4 1/2"

1978 - converted to injection well

1986 - small water flow to surface between 7" X 8 1/4"

Water Flow remediation:
 perf'd 4 1/2 & 7" @ 990'. Could not circ up 7" X 8 1/4" annulus. Squeezed perfs w/ 500sx
 perf'd 4 1/2 & 7" @ 540'. Circ cmt up 7" X 8 1/4" annulus. Csg still leaking @ 65 BWPD.
 squeezed perfs again @ 990' with 400sx

Prepared by: JDE

Date: 8/7/2019

BUREAU OF LAND MANAGEMENT
Carlsbad Field Office
620 East Greene Street
Carlsbad, New Mexico 88220
575-234-5972

Permanent Abandonment of Federal Wells
Conditions of Approval (LPC Habitat)

Failure to comply with the following Conditions of Approval may result in a Notice of Incidents of Noncompliance (INC) in accordance with 43 CFR 3163.1.

1. Plugging operations shall commence within ninety (90) days from the approval date of this Notice of Intent to Abandon.

If you are unable to plug the well by the 90th day provide this office, prior to the 90th day, with the reason for not meeting the deadline and a date when we can expect the well to be plugged. Failure to do so will result in enforcement action.

The rig used for the plugging procedure cannot be released and moved off without the prior approval of the authorized officer. Failure to do so may result in enforcement action.

2. Notification: Contact the appropriate BLM office at least 24 hours prior to the commencing of any plugging operations. For wells in Chaves and Roosevelt County, call 575-627-0272; Eddy County, call 575-361-2822; Lea County, call 575-393-3612.

3. Blowout Preventers: A blowout preventer (BOP), as appropriate, shall be installed before commencing any plugging operation. The BOP must be installed and maintained as per API and manufacturer recommendations. The minimum BOP requirement is a 2M system for a well not deeper than 9,090 feet; a 3M system for a well not deeper than 13,636 feet; and a 5M system for a well not deeper than 22,727 feet.

4. Mud Requirement: Mud shall be placed between all plugs. Minimum consistency of plugging mud shall be obtained by mixing at the rate of 25 sacks (50 pounds each) of gel per 100 barrels of brine water. Minimum nine (9) pounds per gallon.

5. Cement Requirement: Sufficient cement shall be used to bring any required plug to the specified depth and length. Any given cement volumes on the proposed plugging procedure are merely estimates and are not final. Unless specific approval is received, no plug except the surface plug shall be less than 25 sacks of cement. Any plug that requires a tag will have a minimum WOC time of 4 hours.

In lieu of a cement plug across perforations in a cased hole (not for any other plugs), a bridge plug set within 50 feet to 100 feet above the perforations shall be capped with 25 sacks of cement. If a bailer is used to cap this plug, 35 feet of cement shall be sufficient. Before pumping or bailing cement on top of CIBP, tag will be required to verify depth. Based on depth, a tag of the cement may be deemed necessary.

Unless otherwise specified in the approved procedure, the cement plug shall consist of either Neat Class "C", for up to 7,500 feet of depth or Neat Class "H", for deeper than 7,500 feet plugs.

6. Below Ground Level Cap (Lesser Prairie-Chicken Habitat): All casing shall be cut-off at the base of the cellar or 3 feet below final restored ground level (whichever is deeper). The BLM is to be notified a minimum of 4 hours prior to the wellhead being cut off to verify that cement is to surface in the casing and all annuluses. Wellhead cut off shall commence within ten (10) calendar days of the well being plugged. If the cut off cannot be done by the 10th day, the BLM is to be contacted with justification to receive an extension for completing the cut off. Upon the plugging and subsequent abandonment of wells that are located in lesser prairie-chicken habitat, the casings shall be cut-off at the base of the cellar or 3 feet below final restored ground level (whichever is deeper). The well bore shall then be covered with a metal plate at least ¼ inch thick and welded in place. A weep hole shall be left in the plate and/or casing.

NMOCD also requires the operator to notify NMOCD when this type of dry hole marker is used. This can be done on the subsequent report of abandonment which is submitted to the BLM after the well is plugged. State that a below ground cap was installed as required in the COA's from the BLM.

7. Subsequent Plugging Reporting: Within 30 days after plugging work is completed, file one original and three copies of the Subsequent Report of Abandonment, Form 3160-5 to BLM. The report should give in detail the manner in which the plugging work was carried out, the extent (by depths) of cement plugs placed, and the size and location (by depths) of casing left in the well. Show date well was plugged.

8. Trash: All trash, junk and other waste material shall be contained in trash cages or bins to prevent scattering and will be removed and deposited in an approved sanitary landfill. Burial on site is not permitted.

Following the submission and approval of the Subsequent Report of Abandonment, surface restoration will be required. See attached reclamation objectives.

Timing Limitation Stipulation/ Condition of Approval for Lesser Prairie-Chicken:

From March 1st through June 15th annually, abandonment activities will be allowed except between the hours from 3:00 am and 9:00 am. Normal vehicle use on existing roads will not be restricted