

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
OMB NO. 1004-0135
Expires November 30, 2000

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or to re-enter an abandoned well. Use Form 3160-3 (APD) for such proposals.

NOV - 1 2008

OCD-ARTESIA

5. Lease Serial No.

NM-38463

6. If Indian, Allottee or Tribe Name

7. If Unit or CA/Agreement, Name and/or No

SUBMIT IN TRIPLICATE - Other instructions on reverse side

1. Type of Well

☒ Oil Well ☐ Gas Well ☐ Other

2. Name of Operator

OXY USA Inc.

16696

3a. Address

P.O. Box 50250 Midland, TX 79710

3b. Phone No. (include area code)

432-685-5717

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)

660 FSL 1650 FEL SWSE(0) Sec 20 T23S R31E

8. Well Name and No

Pure Gold B #3

Federal

9. API Well No.

30-015-27237

10. Field and Pool, or Exploratory Area

Sand Dunes Delaware, West

11. County or Parish, State

Eddy

NM

ACCEPTED FOR RECORD

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION

☒ Notice of Intent

☐ Subsequent Report

☐ Final Abandonment Notice

TYPE OF ACTION

☐ Acidize

☐ Alter Casing

☐ Casing Repair

☐ Change Plans

☐ Convert to Injection

☐ Deepen

☐ Fracture Treatment

☐ New Construction

☒ Plug and Abandon

☐ Plug Back

☐ Production (Start/Resume)

☐ Reclamation

☐ Recomplete

☐ Temporarily Abandon

☐ Water Disposal

☐ Water Shut-Off

☐ Well Integrity

☐ Other

13. Describe Proposed or Completed Operation (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recompleat horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompleat in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the final site is ready for final inspection.)

TD-8100' PBTD-6155' Perfs-6216-6332' CIBP-6155'

13-3/8" 48# csg @ 730' w/ 650sx, 17-1/2" hole, TOC-Surf-Circ

8-5/8" 34-32# csg @ 4100' w/ 1275sx, 12-1/4" hole, TOC-Surf-Circ

5-1/2" 17# csg @ 8100' w/1290sx, DVT @ 6281' 7-7/8" hole, TOC-2066'-Calc

1. RIH & Tag CIBP @ 6155' M&P 25sx cmt

2. M&P 35sx cmt @ 5100-4950' (Not Required)

3. M&P 35sx cmt @ 4170-3710' WOC-Tag

4. M&P 30sx cmt @ 3850-3710'

5. Perf @ 1950' sqz 45sx cmt to 1830' WOC-Tag

6. Perf @ 780' sqz 45sx cmt to 680' WOC-Tag

7. Perf @ 150' sqz 50sx cmt to Surface

10# MLF between plugs

* SEE ATTACHED FOR
CONDITIONS OF APPROVAL
Seal Potash / RLLP

* Run CBL to determine TOC for perf. Spot cmt from 4170'-TOC. Perf above TOC. Sg. adequate cmt. to fill in/out of 5-1/2" csg. to 680'. Continue w/ Surf plug as per #7. (Solid plug then salt seal)

14. I hereby certify that the foregoing is true and correct
Name (Printed/Typed)

David Stewart

Title

Sr. Regulatory Analyst

Date

10/22/08

THIS SPACE FOR FEDERAL OR STATE OFFICE USE

Approved by

Title

Office

APPROVED

NOV 1 2008
Date

JAMES A. AMOS
SUPERVISOR-EPS

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Title 18 U.S.C. Section 1001, and Title 43 U.S.C. Section 1212, makes it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

**OXY USA Inc. - Proposed
Pure Gold B Federal #3
API No. 30-015-27237**

50sx @ 150'-Surface

45sx @ 780-680' WOC-Tag

45sx @ 1950-1830' WOC-Tag

30sx @ 3850-3710'

35sx @ 4170-4030' WOC-Tag

35sx @ 5100-4950'


25sx @ 6155-6055'
2/08-CIBP @ 6155'

7/06-CIBP @ 6850' w/ 30' cmt

10/04-CIBP @ 7520' w/ 40' cmt

9/04-CIBP @ 7700'

PBTD-8048'

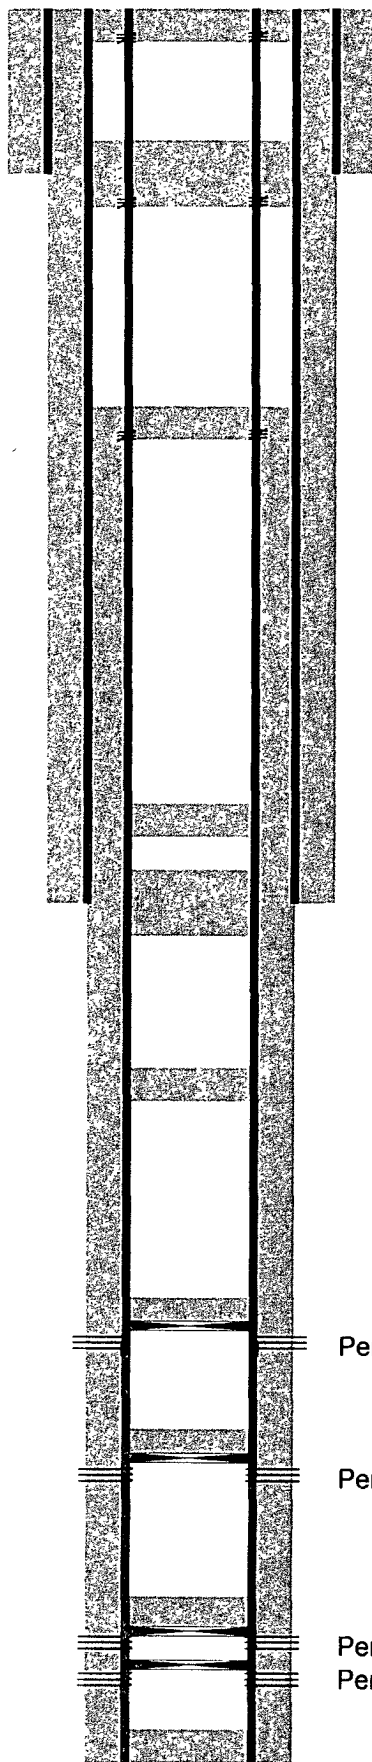

Perf @ 150'

Perf @ 780'

Perf @ 1950'

Perfs @ 6216-6332' - 7/06-Sqz w/ 250sx

Perfs @ 6897-6983'

Perfs @ 7530-7544'
Perfs @ 7723-7883'

17-1/2" hole @ 730'
13-3/8" csg @ 730'
w/ 650sx-TOC-Surf-Circ

12-1/4" hole @ 4100'
8-5/8" csg @ 4100'
w/ 1275sx-TOC-Surf-Circ

7-7/8" hole @ 8100'
5-1/2" csg @ 8100'
DVT @ 6281'
1st w/ 560sx-TOC-6276'-Circ
2nd w/ 730sx-TOC-2066'-Calc

TD-8100'

OXY USA Inc. - Current
Pure Gold B Federal #3
API No. 30-015-27237

