

(July 1992)

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

SUBMIT IN **TRIPlicate**
(Other inst. reverse)

FORM APPROVED
OMB NO. 1004-0136
Expires: February 28, 1995

APPLICATION FOR PERMIT TO DRILL OR DEEPEN

1a. TYPE OF WORK

DRILL ☒

DEEPEN ☐

b. TYPE OF WELL

OIL
WELL ☒

GAS
WELL ☐

OTHER

SINGLE
ZONE ☒

MULTIPLE
ZONE ☐

2. NAME OF OPERATOR

POGO PRODUCING COMPANY

(RICHARD WRIGHT 915-685-8140)

3. ADDRESS AND TELEPHONE NO.

P.O. BOX 10340 MIDLAND, TEXAS 79702-7340 915-685-8100 **17891**

4. LOCATION OF WELL (Report location clearly and in accordance with any State requirements.)

1980' FSL & 330' FWL SEC. 34 T23S-R31E EDDY CO. NM
At proposed prod. zone SAME

14. DISTANCE IN MILES AND DIRECTION FROM NEAREST TOWN OR POST OFFICE*

Approximately 25 miles East of Living New Mexico

15. DISTANCE FROM PROPOSED*

LOCATION TO NEAREST
PROPERTY OR LEASE LINE, FT.
(Also to nearest drlg. unit line, if any)

330'

16. NO. OF ACRES IN LEASE

640

17. NO. OF ACRES ASSIGNED
TO THIS WELL

40

18. DISTANCE FROM PROPOSED LOCATION*
TO NEAREST WELL, DRILLING, COMPLETED,
OR APPLIED FOR, ON THIS LEASE, FT.

1320'

19. PROPOSED DEPTH

8500'

20. ROTARY OR CABLE TOOLS

ROTARY

21. ELEVATIONS (Show whether DF, RT, GR, etc.)

3419' GR.

22. APPROX. DATE WORK WILL START*

As soon as approved

PROPOSED CASING AND CEMENTING PROGRAM

SIZE OF HOLE	GRADE SIZE OF CASING	WEIGHT PER FOOT	SETTING DEPTH	QUANTITY OF CEMENT
25"	CONDUCTOR 20"	NA	40'	Cement to surface with Redi-mix
14 3/4"	H-40 10 3/4"	32.75	750'	700 Sx. circulate to surface
9 7/8"	J-55 7 5/8"	26.4	4250'	1100 Sx. " " "
6 3/4"	J-55 4 1/2"	11.6	8500'	1500 Sx. " " "

1. Drill 25" hole to 40'. Set 40' of 20" conductor pipe and cement to surface with Redi-mix.
2. Drill 14 3/4" hole to 750'. Run and set 750' of 10 3/4" H-40 32.75# ST&C casing. Cement with 700 Sx. of Class "C" cement + additives, circulate cement to surface.
3. Drill 9 7/8" hole to 4250'. Run and set 4250' of 7 5/8" J-55 26.4# ST&C casing. Cement with 1100 Sx. of Class "C" cement + additives, circulate cement to surface.
4. Drill 6 3/4" hole to 8500'. Run and set 8500' of 4 1/2" J-55 11.6# LT&C casing. Cement in two stages, DV Tools at 6200' & 3900'±- Cement with 1500 Sx. of Class "H" cement + additives, circulate cement to surface.

Notify OCD at SPUD & TIME
to witness cementing the
7 3/8" casing.

4. ABOVE SPACE DESCRIBE PROPOSED PROGRAM: If proposal is to deepen, give data on present production zone and proposed new production zone. If proposal is to drill or open directionally, give pertinent data on subsurface locations and measured and true vertical depths. Give blowout preventer depth if any.

SIGNED

TITLE Agent

01/27/00

(This space for Federal or State office use)

PERMIT NO.


APPROVAL DATE

Application approval does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.
CONDITIONS OF APPROVAL, IF ANY:

APPROVED BY [Signature] TITLE Acting State Director DATE 4-11-00

*See Instructions On Reverse Side

U.S.C. Section 1001, makes it a crime for any person knowingly and willfully to make to any department or agency of the
tates any false, fictitious or fraudulent statements or representations.

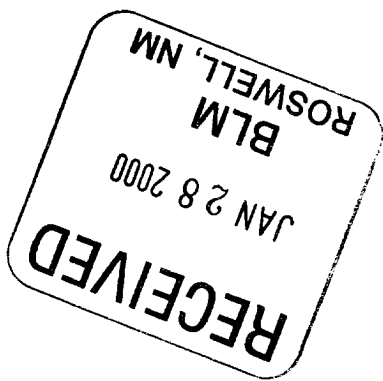

123