

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

FORM APPROVED  
OMB No. 1004-0135  
Expires November 30, 2000

**SUNDRY NOTICES AND REPORTS ON WELLS**  
Do not use this form for proposals to drill or to re-enter an  
abandoned well. Use Form 3160-3 (APD) for such proposals.

**SUBMIT IN TRIPLICATE - Other instructions on reverse side**

1. Type of Well

☒ Oil Well ☐ Gas Well ☐ Other

2. Name of Operator *Vulcan Minerals - Energy*  
*% NMOC*

3a. Address *1000 Rio Brazos Rd.*  
*Aztec, NM 87410*

3b. Phone No. (include area code)  
*334-6178*

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)  
*Sec. 4, T. 30 N., R. 16 W.*

*610/Na 1050/E*

5. Lease Serial No.

*SF-079439 A*

6. If Indian, Allottee or Tribe Name

7. If Unit or CA/Agreement, Name and/or No.

*Horseshoe Gallup*

8. Well Name and No.

*222 HGU*

9. API Well No.

*30045 10015*

10. Field and Pool, or Exploratory Area

11. County or Parish, State

*San Juan NM*

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION			
<input checked="" type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input type="checkbox"/> Other
	<input type="checkbox"/> Change Plans	<input checked="" type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon	
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	

13. Describe Proposed or Completed Operation (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recompleat horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompleat in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.)

*See Attached plugging procedure.*

14. I hereby certify that the foregoing is true and correct  
Name (Printed/Typed)

*NMOC CONTRACT Plugging*

Title

Signature *NMOC*

Date

*4/14/03*

THIS SPACE FOR FEDERAL OR STATE OFFICE USE

Approved by

**Original Signed: Stephen Mason**

Title

Date

*4/16/03*

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Office

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

NMOC

API WELL # Well Name Well # Operator Name Type Stat County Surf\_Owner UL Sec Twp N/S Rng W/E Feet NS Ft EW  
Order\_No 30-045-10015 HORSESHOE GALLUP UNIT 222 PLAYA MINERALS & ENERGY INC O A San Juan 1 4 30 N 16 W 610  
N 1050 E  
status csg\_1 csg\_1q csg\_1d csg\_3 csg\_3q csg\_3d tubing t\_set\_dept csg\_perf SI 8 5/8 91  
70S 5 1/2 1807 100S 1605-1746

Procedure

MIRU, NUBOPE,

POOH Lay Down Rods & Tubing if present,

RIH with Gauge ring,

Pick up work string, Run Scraper if required,

RIH Set CIBP 1505 ', cap with 178 'cement .

Test casing.

POOH lay down tubing.

RU wire line RIH, perforate @ 400 ' + - 50' under surface casing shoe or Mesa Verde base whichever is lower..

Establish Circulation; circulate cement to surface inside and outside casing

Cut off well head and install P&A marker

Cut off anchors 2' below ground

Clean and level location

WELL NAME 222 HCU  
 SEC, TWN, RNG. 4-30N-16W

Mesa Verde


Point Lookout

Maneros

350'

Gallup

1377'

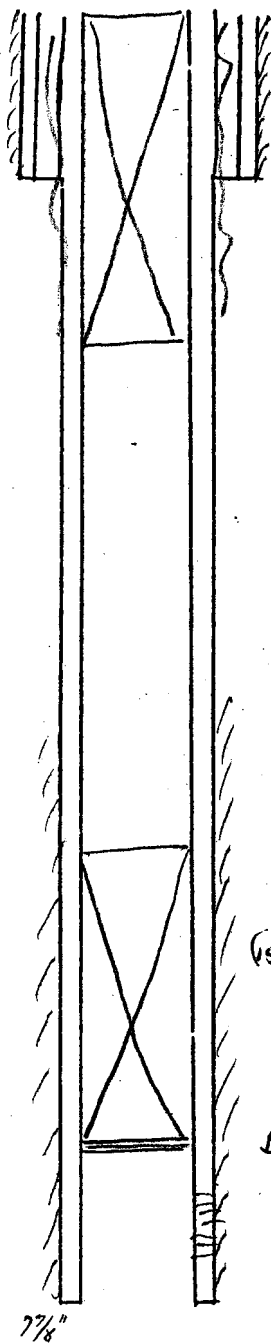

8 5/8" 24#  
91'

plug 400 - surface

$$\begin{aligned} 400 / 7.299 (1.18) &= 46 \text{ sks} \\ 309 / 5.7719 (1.18) &= 45 \text{ sks} \\ 91 / 5.192 (1.18) &= 15 \text{ sks} \\ \hline &106 \text{ sks} \end{aligned}$$

TOC  $\approx$  1296'

$$(1505 - 1327) + 50 / 7.299 (1.18) = 26 \text{ sks}$$

plug 1505 - 1327'

BP @ 1505'

Perf @ 1605 - 1746'

5 1/2" 14#  
1807'

### SURFACE CASING

SIZE HOLE \_\_\_\_\_"  
 SIZE CASING \_\_\_\_\_"  
 Annular Volume \_\_\_\_\_ ft<sup>3</sup>/ft.  
 Cement \_\_\_\_\_ sk  
 Volume \_\_\_\_\_ ft<sup>3</sup>

### INTERMEDIATE CASING

SIZE HOLE \_\_\_\_\_"  
 SIZE CASING \_\_\_\_\_"  
 Annular Volume \_\_\_\_\_ f  
 Cement \_\_\_\_\_ s  
 Volume \_\_\_\_\_ f