District I 1625 N French Dr , Hobbs, NM 88240

District II 1301 W Grand Ave , Artesia, NM 88210 District III

State of New Mexico Energy Minerals and Natural Resources

Department Oil Conservation Division 1220 South St. Francis Dr. Form C-144 July 21, 2008

For temporary pits, closed-loop sytems, and below-grade tanks, submit to the appropriate NMOCD District Office

1000 Rio Brazos Rd , Aztec, NM 87410 <u>District IV</u>	Santa Fe, NM 87505	For permanent pits and exceptions submit to the Santa Fe Environmental Bureau office and provide a copy to the
1220 S St Francis Dr , Santa Fe, NM 87505	11 C . D1 C	appropriate NMOCD District Office
	osed-Loop System, Below-G	
Proposed Al	ternative Method Permit or C	Closure Plan Application
Type of action: Permi	it of a pit, closed-loop system, below-gra	ade tank, or proposed alternative method
X Closu	re of a pit, closed-loop system, below-gr	rade tank, or proposed alternative method
Modi	fication to an existing permit	
	re plan only submitted for an existing por- y-grade tank, or proposed alternative met	ermitted or non-permitted pit, closed-loop system, thod
Instructions: Please submit one application	(Form C-144) per individual pit, close	d-loop system, below-grade tank or alternative request
Please be advised that approval of this request	does not relieve the operator of liability should opera	ations result in pollution of surface water, ground water or the
environment Nor does approval relieve the operat	or of its responsibility to comply with any other appl	licable governmental authority's rules, regulations or ordinances
1 Operator: Burlington Resources Oil & Gas C	Company, LP	OGRID# 14538
Address. P.O. Box 4289, Farmington, NM 8		
Facility or well name: SAN JUAN 27-4 UNIT		
	**	lumber
U/L or Qtr/Qtr C(NE/NW) Section 29	'	4W County: Rio Arriba
·	86.54863333 °N Longitude:	107.2781167 °W NAD: 1927 X 1983
Surface Owner: X Federal Sta	ate Private Tribal Trust or l	Indian Allotment
Temporary X Drilling Workover Permanent Emergency Cavitation X Lined Unlined Liner type X String-Reinforced Liner Seams X Welded X Factory	P&A Thickness 12 mil X LLDPE Other Volume	HDPE PVC Other 4400 bbl Dimensions L 65' x W 45' x D 10'
Type of Operation P&A Drilling a		hes to activities which require prior approval of a permit or
Drying Pad Above Ground Steel Ta Lined Unlined Liner type Liner Seams Welded Factory	nks Haul-off Bins Other Thickness mil LLDPE Other	HDPE PVD Other 34.567897077
4 Below-grade tank: Subsection I of 19 15 1	7 11 NMAC	© F⊞ 2010
Volume bbl Ty	pe of fluid	\(\frac{\circ}{\circ} \) OIL CONS DIV DIST. 3
Tank Construction material		
Secondary containment with leak detection	Visible sidewalls, liner, 6-inch lift and	d automatic overflow shut-off
	ble sidewalls only Other	25222324
Liner Type Thickness mil	THDPE PVC Othe	er
Alternative Method:		
Submittal of an exception request is required Exce	eptions must be submitted to the Santa Fe En	ivironmental Bureau office for consideration of approval

Fencing: Subsection D of 19 15 17 11 NMAC (Applies to permanent pit, temporary pits, and below-grade tanks) Chain link, six feet in height, two strands of barbed wire at top (Required if located within 1000 feet of a permanent residence, school, hospital, institution or church) Four foot height, four strands of barbed wire evenly spaced between one and four feet Alternate Please specify			
7			
Netting: Subsection E of 19 15 17 11 NMAC (Applies to permanent pits and permanent open top tanks) Screen Netting Other Monthly inspections (If netting or screening is not physically feasible)			
8			
Signs: Subsection C of 19 15 17 11 NMAC 12" X 24", 2" lettering, providing Operator's name, site location, and emergency telephone numbers X Signed in compliance with 19 15 3 103 NMAC	,		
9 Administrative Approvals and Exceptions: Justifications and/or demonstrations of equivalency are required Please refer to 19 15 17 NMAC for guidance			
Please check a box if one or more of the following is requested, if not leave blank:		.	
Administrative approval(s) Requests must be submitted to the appropriate division district of the Santa Fe Environmental Bureau office for cons (Fencing/BGT Liner)	ideration of ap	proval	
Exception(s) Requests must be submitted to the Santa Fe Environmental Bureau office for consideration of approval			
Siting Criteria (regarding permitting) 19 15.17 10 NMAC Instructions: The applicant must demonstrate compliance for each siting criteria below in the application. Recommendations of acceptable source material are provided below. Requests regarding changes to certain siting criteria may require administrative approval from the appropriate district office or may be considered an exception which must be submitted to the Santa Fe Environmental Bureau Office for consideration of approval. Applicant must attach justification for request. Please refer to 19.15.17.10 NMAC for guidance. Siting criteria does not apply to drying pads or above grade-tanks associated with a closed-loop system.			
Ground water is less than 50 feet below the bottom of the temporary pit, permanent pit, or below-grade tank. - NM Office of the State Engineer - tWATERS database search, USGS, Data obtained from nearby wells	Yes	□No	
Within 300 feet of a continuously flowing watercourse, or 200 feet of any other watercourse, lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark). - Topographic map, Visual inspection (certification) of the proposed site	Yes	□No	
Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application.	Yes	□No	
(Applies to temporary, emergency, or cavitation pits and below-grade tanks)	□NA		
- Visual inspection (certification) of the proposed site, Aerial photo, Satellite image	 □ _{V-} ,		
Within 1000 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. (Applied to permanent pits)	Yes NA	No	
- Visual inspection (certification) of the proposed site, Aerial photo, Satellite image	Ì		
Within 500 horizonal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes, or within 1000 horizontal feet of any other fresh water well or spring, in existence at the time of initial application.	Yes	∐No	
- NM Office of the State Engineer - 1WATERS database search, Visual inspection (certification) of the proposed site			
Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended	Yes	□No	
 Written confirmation or verification from the municipality, Written approval obtained from the municipality Within 500 feet of a wetland. US Fish and Wildlife Wetland Identification map, Topographic map, Visual inspection (certification) of the proposed site 	Yes	□No	
Within the area overlying a subsurface mine.	Yes	□No	
 Written confirmation or verification or map from the NM EMNRD - Mining and Mineral Division Within an unstable area. Engineering measures incorporated into the design, NM Bureau of Geology & Mineral Resources, USGS; NM Geological 	Yes	No	
Society, Topographic map Within a 100-year floodplain EFMA map	Yes	□No	

Temporary Pits, Emergency Pits and Below-grade Tanks Permit Application Attachment Checklist: Subsection B of 19 15 17 9 NMAC	ĺ
Instructions Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached	
Hydrogeologic Report (Below-grade Tanks) - based upon the requirements of Paragraph (4) of Subsection B of 19 15 17 9 NMAC	
Hydrogeologic Data (Temporary and Emergency Pits) - based upon the requirements of Paragraph (2) of Subsection B of 19 15 17 9	l
Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19 15 17 10 NMAC	
Design Plan - based upon the appropriate requirements of 19 15 17 11 NMAC	
Operating and Maintenance Plan - based upon the appropriate requirements of 19 15 17 12 NMAC	
Closure Plan (Please complete Boxes 14 through 18, if applicable) - based upon the appropriate requirements of Subsection C of 19 15 17 9 NMAC and 19 15 17 13 NMAC	l
Previously Approved Design (attach copy of design) API or Permit	ļ
	J T
Closed-loop Systems Permit Application Attachment Checklist: Subsection B of 19 15 17 9 NMAC Instructions Each of the following items must be attached to the application Please indicate, by a check mark in the box, that the documents are attached Geologic and Hydrogeologic Data (only for on-site closure) - based upon the requirements of Paragraph (3) of Subsection B of 19 15 17 9	
Siting Criteria Compliance Demonstrations (only for on-site closure) - based upon the appropriate requirements of 19 15 17 10 NMAC	
Design Plan - based upon the appropriate requirements of 19 15 17 11 NMAC	J
Operating and Maintenance Plan - based upon the appropriate requirements of 19 15 17 12 NMAC	
Closure Plan (Please complete Boxes 14 through 18, if applicable) - based upon the appropriate requirements of Subsection C of 19 15 17 9 NMAC and 19 15 17 13 NMAC	
Previously Approved Design (attach copy of design) API	ĺ
Previously Approved Operating and Maintenance Plan API	
13	1
Permanent Pits Permit Application Checklist: Subsection B of 19 15 17 9 NMAC	l
Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached.	
Hydrogeologic Report - based upon the requirements of Paragraph (I) of Subsection B of 19 15 17 9 NMAC	l
Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19 15 17 10 NMAC Climatological Factors Assessment	ĺ
Circumatorogical Factors Assessment Certified Engineering Design Plans - based upon the appropriate requirements of 19 15 17 11 NMAC	
Dike Protection and Structural Integrity Design based upon the appropriate requirements of 19 15 17 11 NMAC	l
Leak Detection Design - based upon the appropriate requirements of 19 15 17 11 NMAC	l
Liner Specifications and Compatibility Assessment - based upon the appropriate requirements of 19 15 17 11 NMAC	
Quality Control/Quality Assurance Construction and Installation Plan	
Operating and Maintenance Plan - based upon the appropriate requirements of 19 15 17 12 NMAC	
Freeboard and Overtopping Prevention Plan - based upon the appropriate requirements of 19 15 17 11 NMAC	
Nuisance or Hazardous Odors, including H2S, Prevention Plan Emergency Response Plan	l
Oil Field Waste Stream Characterization	l
Monitoring and Inspection Plan	
Erosion Control Plan	l
Closure Plan - based upon the appropriate requirements of Subsection C of 19 15 17 9 NMAC and 19 15 17 13 NMAC	-
14	i
Proposed Closure: 19 15 17 13 NMAC Instructions: Please complete the applicable boxes, Boxes 14 through 18, in regards to the proposed closure plan.	ļ
Type Drilling Workover Emergency Cavitation P&A Permanent Pit Below-grade Tank Closed-loop System	
☐ Alternative Proposed Closure Method Waste Excavation and Removal	l
Waste Removal (Closed-loop systems only)	
On-site Closure Method (only for temporary pits and closed-loop systems)	
In-place Burial On-site Trench	l
Alternative Closure Method (Exceptions must be submitted to the Santa Fe Environmental Bureau for consideration)	
15	ĺ
Waste Excavation and Removal Closure Plan Checklist: (19 15 17 13 NMAC) Instructions: Each of the following items must be attached to the closure plan.	l
Please indicate, by a check mark in the box, that the documents are attached. Protocols and Procedures - based upon the appropriate requirements of 19 15 17 13 NMAC	l
Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of Subsection F of 19 15 17 13 NMAC	
Disposal Facility Name and Permit Number (for liquids, drilling fluids and drill cuttings)	
Soil Backfill and Cover Design Specifications - based upon the appropriate requirements of Subsection H of 19 15 17 13 NMAC	1
Re-vegetation Plan - based upon the appropriate requirements of Subsection I of 19 15 17 13 NMAC	1
Site Reclamation Plan - based upon the appropriate requirements of Subsection G of 19 15 17 13 NMAC	1

16	A LIGHT A A Long Council Counc			
Instructions Please identify the facility or facilities for	nat Utilize Above Ground Steel Tanks or Haul-off Bins Only: (19 15 17 13 D NMAC) the disposal of liquids, drilling fluids and drill cuttings Use attachment if more than two	o		
facilities are required	D. IF It Down II			
	Disposal Facility Permit #			
Disposal Facility Name Will any of the proposed closed-loop system opera	Disposal Facility Permit # tions and associated activities occur on or in areas that will not be used for future	e service and		
Yes (If yes, please provide the information Required for impacted areas which will not be used for	☐ No			
Soil Backfill and Cover Design Specification Re-vegetation Plan - based upon the appropriate to the second	on - based upon the appropriate requirements of Subsection H of 19 15 17 13 NM or atter requirements of Subsection I of 19 15 17 13 NMAC propriate requirements of Subsection G of 19 15 17 13 NMAC	AC		
17				
Siting Criteria (Regarding on-site closure meth Instructions Each siting criteria requires a demonstration certain siting criteria may require administrative approval j	ods only: 19 15 17 10 NMAC of compliance in the closure plan Recommendations of acceptable source material are provided from the appropriate district office or may be considered an exception which must be submitted the emonstrations of equivalency are required Please refer to 19 15 17 10 NMAC for guidance			
Ground water is less than 50 feet below the bottom - NM Office of the State Engineer - iWATERS date	n of the burned waste labase search, USGS Data obtained from nearby wells	Yes No		
Ground water is between 50 and 100 feet below th	e bottom of the buried waste abase search, USGS, Data obtained from nearby wells	∏Yes ∏No ∏N/A		
_				
Ground water is more than 100 feet below the bott - NM Office of the State Engineer - iWATERS date	om of the burned waste abase search, USGS, Data obtained from nearby wells	Yes No		
(measured from the ordinary high-water mark)	or 200 feet of any other significant watercourse or lakebed, sinkhole, or playa lake	Yes No		
- Topographic map, Visual inspection (certification) of the proposed site			
Within 300 feet from a permanent residence, school, ho - Visual inspection (certification) of the proposed su	spital, institution, or church in existence at the time of initial application ie, Aerial photo, satellite image	Yes No		
purposes, or within 1000 horizontal fee of any other free	vater well or spring that less than five households use for domestic or stock watering sh water well or spring, in existence at the time of the initial application base, Visual inspection (certification) of the proposed site	Yes No		
pursuant to NMSA 1978, Section 3-27-3, as amended	efined municipal fresh water well field covered under a municipal ordinance adopted	Yes No		
Within 500 feet of a wetland	repairty, Written approval obtained from the municipality Topographic map, Visual inspection (certification) of the proposed site	Yes No		
Within the area overlying a subsurface mine	Topographic map, visual-inspection (certification) of the proposed site	☐Yes ☐No		
- Written confiramtion or verification or map from t	he NM EMNRD-Mining and Mineral Division			
Within an unstable area		Yes No		
Engineering measures incorporated into the design Topographic map	, NM Bureau of Geology & Mineral Resources, USGS, NM Geological Society,			
Within a 100-year floodplain - FEMA map		Yes No		
On-Site Closure Plan Checklist: (19 15 17 13 N by a check mark in the box, that the documents of	MAC) Instructions: Each of the following items must bee attached to the clostre attached.	sure plan. Please indicate,		
Siting Criteria Compliance Demonstrations	- based upon the appropriate requirements of 19 15 17 10 NMAC			
Proof of Surface Owner Notice - based upon the appropriate requirements of Subsection F of 19 15 17 13 NMAC				
Construction/Design Plan of Burial Trench (if applicable) based upon the appropriate requirements of 19 15 17 11 NMAC				
Construction/Design Plan of Temporary Pi	t (for in place burial of a drying pad) - based upon the appropriate requirements of	f 19 15 17 11 NMAC		
	appropriate requirements of 19 15 17 13 NMAC			
	- based upon the appropriate requirements of Subsection F of 19 15 17 13 NMA	С		
	n the appropriate requirements of Subsection F of 19 15 17 13 NMAC			
	r (for liquids, drilling fluids and drill cuttings or in case on-site closure standards riate requirements of Subsection H of 19 15 17 13 NMAC	cannot be achieved)		
	oriate requirements of Subsection H of 19 15 17 13 NMAC			
Site Reclamation Plan - based upon the appropriate requirements of Subsection G of 19 15 17 13 NMAC				

19 Operator Application Certification:
I hereby certify that the information submitted with this application is true, accurate and complete to the best of my knowledge and belief
Name (Print) Title
Signature Date e-mail address Telephone
e-mail address
OCD Approval: Permit Application (including closure plan) Closure Plan-(only) OCD Conditions (see attachment) OCD Representative Signature: Approval Date: OCD Permit Number:
Closure Report (required within 60 days of closure completion): Subsection K of 19 15 17 13 NMAC Instructions Operators are required to obtain an approved closure plan prior to implementing any closure activities and submitting the closure report. The closure report is required to be submitted to the division within 60 days of the completion of the closure activities. Please do not complete this section of the form until an approved closure plan has been obtained and the closure activities have been completed X Closure Completion Date: September 17, 2009
Closure Method: Waste Excavation and Removal X On-site Closure Method Alternative Closure Method Waste Removal (Closed-loop systems only) If different from approved plan, please explain
Closure Report Regarding Waste Removal Closure For Closed-loop Systems That Utilize Above Ground Steel Tanks or Haul-off Bins Only: Instructions: Please identify the facility or facilities for where the liquids, drilling fluids and drill cuttings were disposed Use attachment if more than two facilities were utilized. Disposal Facility Name Disposal Facility Permit Number Were the closed-loop system operations and associated activities performed on or in areas that will not be used for future service and operations? Yes (If yes, please demonstrate compliant to the items below) No Required for impacted areas which will not be used for future service and operations Site Reclamation (Photo Documentation) Soil Backfilling and Cover Installation Re-vegetation Application Rates and Seeding Technique
Closure Report Attachment Checklist: Instructions. Each of the following items must be attached to the closure report. Please indicate, by a check mark in the box, that the documents are attached. X Proof of Closure Notice (surface owner and division) X Proof of Deed Notice (required for on-site closure) X Plot Plan (for on-site closures and temporary pits) X Confirmation Sampling Analytical Results (if applicable) Waste Material Sampling Analytical Results (if applicable) X Disposal Facility Name and Permit Number X Soil Backfilling and Cover Installation X Re-vegetation Application Rates and Seeding Technique X Site Reclamation (Photo Documentation) On-site Closure Location Latitude 36.54839 °N Longitude 107.27826 °W NAD 1927 X 1983
Operator Closure Certification: I hereby certify that the information and attachments submitted with this closure report is ture, accurate and complete to the best of my knowledge and belief. I also certify that the closure complies with all applicable closure requirements and conditions specified in the approved closure plan.
Name (Print)
Signature Date Date
e-mail address Telephone 505-326-9865



Closure Report

Lease Name: SAN JUAN 27-4 UNIT 52N

API No.: 30-039-30488

In accordance with Rule 19.15.17.13 NMAC the following information describes the closure of the temporary pit referenced above. All proper documentation regarding closure activities is being included with the C-144. The temporary pit for this location was constructed and location drilled before June 16, 2008 (effective date for Rule 19.15.17). While closure of the temporary pit did fall within the rule some dates for submittals are after the rig release date.

- Details on Capping and Covering, where applicable. (See report)
- Plot Plan (Pit Diagram) (Included as an attachment)
- . Inspection Reports (Included as an attachment)
- Sampling Results (Included as an attachment)
- C-105 (Included as an attachment)
- Copy of Deed Notice will be filed with County Clerk (Not required on Federal, State, or Tribal land as stated by FAQ dated October 30, 2008)

General Plan:

All free standing liquids will be removed at the start of the pit closure process from the pit and disposed of in a
division-approved facility or recycle, reuse or reclaim the liquids in a manner that the appropriate division
district office approves.

All recovered liquids were disposed of at Basin Disposal (Permit #NM-01-005) and any sludge or soil required to be removed to facilitate closure was hauled to Envirotech Land Farm (Permit #NM-01-011) and JFJ Landfarm % IEI (Permit #NM-01-0010B).

2. The preferred method of closure for all temporary pits will be on-site burial, assuming that all the criteria listed in sub-section (B) of 19.15.17.13 are met.

The pit was closed using onsite burial.

 The surface owner shall be notified of BR's closing of the temporary pit as per the approved closure plan using certified mail, return receipt requested.

The closure process notification to the landowner was sent via email. (See Attached)(Well located on Federal Land, certified mail is not required for Federal Land per BLM/OCD MOU.)

Within 6 months of the Rig Off status occurring BR will ensure that temporary pits are closed, re-contoured, and reseeded.

Provision 4 of the closure plan requirements were not met due to rig move off date as noted on C-105 which was prior to pit rule change. Burlington will ensure compliance with this rule in the future.

- 5. Notice of Closure will be given to the Aztec Division office between 72 hours and one week of closure via email, or verbally. The notification of closure will include the following:
 - i. Operator's name
 - ii. Location by Unit Letter, Section, Township, and Range. Well name and API number.

Notification is attached.

manually or medianically cutting liner at mud level are removing all remaining iner. Care will be taken to remove "All" of the liner i.e., edges of liner entrenched or buried. All excessive liner will be disposed of at a licensed disposal facility.

Liner of temporary pit was removed above "mud level" after stabilization. Removal of the liner consisted of manually cutting liner at mud level and removing all remaining liner. Care was taken to remove "ALL" of the liner i.e., edges of liner entrenched or buried. All excessive liner was disposed of at a licensed disposal facility, (San Juan County Landfill).

7. Pit contents shall be mixed with non-waste containing, earthen material in order to achieve the solidification process. The solidification process will be accomplished using a combination of natural drying and mechanically mixing. Pit contents will be mixed with non-waste, earthen material to a consistency that is deemed a safe and stable. The mixing ratio shall not exceed 3 parts clean soil to 1 part pit contents.

Burlington mixed the Pit contents with non-waste containing, earthen material in order to achieve the solidification process. The solidification process was accomplished by using a combination of natural drying and mechanically mixing. Pit contents were mixed with non-waste, earthen material to a consistency that is deemed as safe and stable. The mixing ratio consisted of approximately 3 parts clean soil to 1 part pit contents.

8. A five point composite sample will be taken of the pit using sampling tools and all samples tested per Subsection B of 19.15.17.13(B)(1)(b). In the event that the criteria are not met, all contents will be handled per Subparagraph (a) of Paragraph (1) of Subsection B of 19.15.17.13 i.e., Dig and haul.

A five point composite sample was taken of the pit using sampling tools and all samples tested per Subsection B of 19.15.17.1 3(B)(1)(b). (Sample results attached).

Tests Method	Limit (mg/Kg)	Results
EPA SW-846 8021B or 8260B	0.2	3.3 ug/kg
EPA SW-846 8021B or 8260B	50	118 ug/kG
EPA SW-846 418.1	2500	347mg/kg
EPA SW-846 8015M	500	13.6 mg/Kg
EPA 300.1	(1000/500	55.0 mg/L
	EPA SW-846 8021B or 8260B EPA SW-846 8021B or 8260B EPA SW-846 418.1 EPA SW-846 8015M	EPA SW-846 8021B or 8260B 0.2 EPA SW-846 8021B or 8260B 50 EPA SW-846 418.1 2500 EPA SW-846 8015M 500

9. Upon completion of solidification and testing standards being passed, the pit area will be backfilled with compacted, non-waste containing, earthen material. A minimum of four feet of cover shall be achieved and the cover shall include one foot of suitable material to establish vegetation at the site, or the background thickness of topsoil, whichever is greater. If standard testing fails BR will dig and haul all contents pursuant to 19.15.17.13.i.a. After doing such, confirmation sampling will be conducted to ensure a release has not occurred.

The pit material passed solidification and testing standards. The pit area was then backfilled with compacted, non-waste containing, earthen material. More than four feet of cover was achieved and the cover included one foot of suitable material to establish vegetation at the site.

10. During the stabilization process if the liner is ripped by equipment the Aztec OCD office will be notified within 48 hours and the liner will be repaired if possible. If the liner can not be repaired then all contents will be excavated and removed.

The integrity of the liner was not damaged in the pit closure process.

11. Dig and Haul Material will be transported to the Envirotech Land Farm located 16 miles south of Bloomfield on Angel Peak Road, CR 7175. Permit # NM010011

Dig and Haul was not required.

12. Re-contouring c ocation w matc it, snape, ne, orman texture cit e surrour ing. Re-s aping winclude drainage control, prevent ponding, and prevent erosion. Natural drainages will be unimpeded and water bars and/or silt traps will be place in areas where needed to prevent erosion on a large scale. Final recontour shall have a uniform appearance with smooth surface, fitting the natural landscape.

The pit area was re-contoured to match fit, shape, line, form and texture of the surrounding area. Reshaping included drainage control, to prevent ponding and erosion. Natural drainages were unimpeded and water bars and/or silt traps were placed in areas where needed to prevent erosion on a large scale. Final recontour has a uniform appearance with smooth surface, fitting the natural landscape.

13. Notification will be sent to OCD when the reclaimed area is seeded.

Provision 13 was accomplished through complying with Forest seeding requirements as allowed by the BLM/OCD MOU.

14. BR shall seed the disturbed areas the first growing season after the operator closes the pit. Seeding will be accomplished via drilling on the contour whenever practical or by other division-approved methods. BLM or Forest Service stipulated seed mixes will used on federal lands. Vegetative cover will equal 70% of the native perennial vegetative cover (un-impacted) consisting of at least three native plant species, including at least one grass, but not including noxious weeds, and maintain that cover through two successive growing seasons. Repeat seeding or planting will be continued until successful vegetative growth occurs.

Provision 14 was accomplished through complying with Forest seeding requirements as allowed by the BLM/OCD MOU.

15. The temporary pit will be located with a steel marker, no less than four inches in diameter, cemented in a hole three feet deep in the center of the onsite burial upon the abandonment of all the wells on the pad. The marker will be flush with the ground to allow access of the active well pad and for safety concerns. The marker will include a threaded collar to be used for future abandonment. The top of the marker will contain a welded steel 12" square plate that indicates the onsite burial of the temporary pit. The plate will be easily removable and a four foot tall riser will be threaded into the top of the collar marker and welded around the base with the operator's information at the time of all wells on the pad are abandoned. The operator's information will include the following: Operator Name, Lease Name, Well Name and number, Unit Number, Section, Township, Range and an indicator that the marker is an onsite burial location.

Provision 15 was accomplished by installing a steel marker in the temporary pit, no less than four inches in diameter, cemented in a hole three feet deep in the center of the onsite burial. The marker is flush with the ground to allow access of the active well pad and for safety concerns. The top of the marker contains a welded steel 12" square plate that indicates the onsite burial of the temporary pit. The plate contains the following: Operator Name, Lease Name, Well Name and number, Unit Number, Section, Township, Range and an indicator that the marker is an onsite burial location.

The plate will be easily removable and a four foot tall riser will be threaded into the top of the collar marker and welded around the base with the following operator's information at the time of all wells on the pad are abandoned. The riser will be labeled: BR, BLM, SAN JUAN 27-4 UNIT 52N, UL-C, Sec. 29, T 27N, R 4W, API # 30-039-30488

Tafoya, Crystal

From

Tafoya, Crystal

Sent

Tuesday, July 01, 2008 7 33 AM

To Cc⁻ 'jreidinger@fs fed us'

Subject.

'brandon powell@state nm us' San Juan 27-4 Unit 52N

Good Morning John,

The requirements of the new OCD pit rule 17 requires notification to the surface owner that we are planning to close the temporary pit on-site at the subject location. Please let me know if you have any questions

Thank you,

Crystal L Tafoya
Regulatory Technician
ConocoPhillips Company
San Juan Business Unit
Phone (505) 326-9837
Email Crystal Tafoya@conocophillips com

District 1
1625 N. French Dr., Hobbs, NM 88240
District II
1301 W. Grand Avenne, Artesia, NM 88210
District III
1000 Rio Brazos Rd., Aztec, NM 87410
District IV

1220 S. St. Francis Dr., Santa Fe, NM 87505

1 API Number

29

Joint or Infill

27-N

4-W

4 Consolidation Code

E

Dedicated Acres

320.00

State of New Mexico
Energy, Minerals & Natural Resources Department
OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

Form C-102 Revised October 12, 2005 Submit to Appropriate District Office State Lease - 7 Copies Fee Lease - 3 Copies

☐ AMMENDED REPORT

RIO ARRIBA

WELL LOCATION AND ACREAGE DEDICATION PLAT

2 Pool Code

					1	B	ASIN DAKOTA / I	BLANÇO MESAVE	ERDE
⁴ Property (Code				•	nty Name N 27-4 UNIT	and the second s		⁶ Well Number 52N
⁷ OGRID	7 OGRID No. 8 Operator Name BURLINGTON RESOURCES OIL & GAS COMPANY LP					⁹ Elevation 7191			
					10 SURFACE	LOCATION			
UL or lot no. C	Section 29	Township 27-N	Range 4-W	Lot Idn	Feet from the 1070	North/South line NORTH	Feet from the 1390	East/West line WEST	County RIO ARRIBA
			11 E	ottom H	ole Location	If Different Fro	m Surface		
UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County

NORTH

410

WEST

NO ALLOWABLE WILL BE ASSIGNED TO THIS COMPLETION UNTIL ALL INTERESTS HAVE BEEN CONSOLIDATED OR A NON-STANDARD UNIT HAS BEEN APPROVED BY THE DIVISION

1945

Order No.

16	N 89'55' E		WELL FLAG	5218.1° (R)	OPERATOR CERTIFICATION I hereby certify that the information contained herein is true and
5218.8' (R)		1070	NAD 83 LAT: 36.548590° N		complete to the best of my knowledge and belief, and that this organization either owns a working interest or unleased muneral interest in the land including the proposed bottom hole location or
5218.	1945	100	LONG: 107.278107° V NAD 27 LAT:36°32.914856' N		kas a right to drill this well at this location pursuant to a contract with an owner of such a mineral or working interest, or to a voluntary pooling agreement ar a compulsory pooling order
	1390'		LONG: 107°16.65048		heretofore entered by the division.
<u> </u>	, si (Signature
	16. 7.3"	TTOM HOLE D 83			Printed Name
410	LA	T: 36.546201° N NG: 107.281444° W		,	Title and E-mail Address
	LA	D 27 T:36°32.771514' N NG: 107°16.850725' W			Date
 	LU	NG: 107-10.830723 W		~ \ -	18 SURVEYOR CERTIFICATION 1 hereby certify that the well location shown on this plat
					was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my belief.
	W/2 DEDICATE USA SF	-080670			Date of Survey: 7/9/08
	SECTI T-27-N,			. [Signature and Seal of Professional Surveyor:
					P. BROADHURGH
		·			BUTTER Y
*					(1/27) old
021:29	:				The state of the s
Z,					- HOPESEN
					Certificate Number: NM 11393

BURLINGTON RESOURCES OIL & GAS COMPANY LP SAN JUAN 27-4 UNIT #52N 1070' FNL, 1390' FWL SECTION 29, T-27-N, R-4-W, N.M.P.M., **RIO ARRIBA COUNTY, NEW MEXICO** ELEV.: 7191 NAVD88 DATE: JULY 9, 2008 ABOVE SHALLOW SIDE) **BNO NEW ACCESS** APPROXIMATE 15'X75' PIT AREA LINED WITH 12 MIL **6**€ POLY LINER 4' HIGH WALL FROM BOTTOM OF BLOW PIT SLOPES RESERVE PIT C/L RESERVE PIT 10' DEEP 75.0 12' DEEP C/L WELLHEAD 1' HIGH BERM SJ 27-4 #52M 8 (OVERFLOW-3' WIDE AND , RAMP INTO PIT CONSTRUCTED FROM PAD GRADE RIG ANCHOR TO THE BOTTOM OF FLARE AREA NAD 83 LAT: 36.548651°N LONG: 107.278231°W REAR \odot WELLHEAD TO BACK 130 LAYDOWN N 4° W C0 CO 170 WELLHEAD TO FRONT DISTURBANCE RIG ANCHOR SIDE DEEP ABOVE P EDGE œ @ (2) 230' x 300' OIKE: B'130 170

C5

12.0

BLOOMFIELD,NM, 87413

CHENAULT CONSULTING INC. PHONE (505) 325-7707

2.0'

6.0

PIT CROSS SECTION

NAD 83 LAT: 36 548590°N / LONG 107.278107°W

-- 3.0'

NAD 83 LAT: 36.548427'N LONG: 107.278324'W ELEV: 7192

4

СЗ

3

CCI

DISTURBANCE

Ŕ

EDGE

UNMARKED BURIED (2) WORKING DAYS PRIOR TO CONSTRUCTION. JNDERGROUND UTILITIES OR PIPELINES. L FOR LOCATION OF ANY MARKED OR U AND OR ACCESS ROAD AT LEAST TWO UNDERGROUND UTILITIES C FOR C.C.I. SURVEYS IS NOT CONTRACTOR SHOULD (PIPELINES OR CABLES r

RESERVE

NOTES:

TOTAL ACRES = 2.95 ACRES



EPA METHOD 8015 Modified Nonhalogenated Volatile Organics Total Petroleum Hydrocarbons

Client:	ConocoPhillips	Project #:	96052-0026
Sample ID:	SJ 27-4, #52N	Date Reported:	10-10-08
Laboratory Number:	47596	Date Sampled:	10-01-08
Chain of Custody No:	5426	Date Received:	10-02-08
Sample Matrix:	Soil	Date Extracted:	10-08-08
Preservative:	Cool	Date Analyzed:	10-09-08
Condition:	Intact	Analysis Requested:	8015 TPH

Parameter	Concentration (mg/Kg)	Det. Limit (mg/Kg)
Gasoline Range (C5 - C10)	3.8	0.2
Diesel Range (C10 - C28)	9.8	0.1
Total Petroleum Hydrocarbons	13.6	0.2

ND - Parameter not detected at the stated detection limit.

References:

Method 8015B, Nonhalogenated Volatile Organics, Test Methods for Evaluating Solid Waste,

SW-846, USEPA, December 1996.

Comments:

Drilling Pit Sample.

Analyst

Review

5796 U.S. Highway 64 • Farmington, NM 87401 • Tel 505-632-0615 • Fax 505-632-1865



EPA METHOD 8015 Modified Nonhalogenated Volatile Organics Total Petroleum Hydrocarbons

Oli ametr	Company District	Duning at #4	00050 0000
Client:	ConocoPhillips	Project #:	96052-0026
Sample ID:	SJ 27-4 #52N Background	Date Reported:	10-10-08
Laboratory Number:	47597	Date Sampled:	10-01-08
Chain of Custody No:	5426	Date Received:	10-02-08
Sample Matrix.	Soil	Date Extracted:	10-08-08
Preservative:	Cool	Date Analyzed.	10-09-08
Condition ⁻	Intact	Analysis Requested:	8015 TPH

Parameter	Concentration (mg/Kg)	Det. Limit (mg/Kg)
Gasoline Range (C5 - C10)	ND	0.2
Diesel Range (C10 - C28)	23.8	0.1
Total Petroleum Hydrocarbons	23.8	0.2

ND - Parameter not detected at the stated detection limit.

References:

Method 8015B, Nonhalogenated Volatile Organics, Test Methods for Evaluating Solid Waste,

SW-846, USEPA, December 1996.

Comments:

Drilling Pit Sample.

Analyst

Review

5796 U.S. Highway 64 • Farmington, NM 87401 • Tel 505-632-0615 • Fax 505-632-1865



EPA Method 8015 Modified Nonhalogenated Volatile Organics Total Petroleum Hydrocarbons

Quality Assurance Report

Client [.]	QA/QC		Project #:		N/A
Sample ID:	10-09-08 QA/0	QC	Date Reported:		10-10-08
Laboratory Number:	47590		Date Sampled:		N/A
Sample Matrix:	Methylene Chlor	ride	Date Received:		N/A
Preservative:	N/A		Date Analyzed:		10-09-08
Condition:	N/A		Analysis Reques	ted:	TPH
	I-Cal Date	I-Cal RF:	C-Cal RF:	% Difference	Accept: Range
Gasoline Range C5 - C10	05-07-07	1.0017E+003	1.0021E+003	0.04%	0 - 15%
Diesel Range C10 - C28	05-07-07	1.0064E+003	1.0068E+003	0.04%	0 - 15%
				^, 1/ market	•
Blank Conc. (mg/L - mg/Kg)		Concentration		Detection Limi	t <u>i</u>
Gasoline Range C5 - C10		ND		0.2	
Diesel Range C10 - C28		ND		0.1	
Total Petroleum Hydrocarbons		ND		0.2	
	: National desirability and a second or again a second second			minus V Bolling and Sant site St. of L.	
Duplicate Conc. (mg/Kg)	Sample	Duplicate	% Difference	Accept. Range	
Gasoline Range C5 - C10	ND	ND	0.0%	0 - 30%	
Diesel Range C10 - C28	13.9	13.8	0.7%	0 - 30%	
Spike Conc. (mg/Kg)	Sample	Spike Added	Spike Result	% Recovery	Accept Range
Gasoline Range C5 - C10	ND	250	245	98.0%	75 - 125%
Diesel Range C10 - C28	13.9	250	261	98.9%	75 - 125%

ND - Parameter not detected at the stated detection limit.

References:

Method 8015B, Nonhalogenated Volatile Organics, Test Methods for Evaluating Solid Waste,

SW-846, USEPA, December 1996.

Comments:

QA/QC for Samples 47590 - 47599.

Analyst



EPA METHOD 8021 AROMATIC VOLATILE ORGANICS

.			
Client:	ConocoPhillips	Project #:	96052-0026
Sample ID:	SJ 27-4 #52N	Date Reported:	10-10-08
Laboratory Number:	47596	Date Sampled:	10-01-08
Chain of Custody:	5426	Date Received:	10-02-08
Sample Matrix:	Soil	Date Analyzed:	10-09-08
Preservative.	Cool	Date Extracted:	10-08-08
Condition:	Intact	Analysis Requested:	BTEX

Parameter	Concentration (ug/Kg)	Det. Limit (ug/Kg)	
	(49/119)	(ug/itg)	
Benzene	3.3	0.9	
Toluene	29.9	1.0	
Ethylbenzene	8.6	1.0	
p,m-Xylene	57.3	1.2	
o-Xylene	18.8	0.9	
Total BTEX	118		

ND - Parameter not detected at the stated detection limit.

Surrogate Recoveries:	Parameter	Percent Recovery
	Fluorobenzene	98.0 %
	1,4-difluorobenzene	98.0 %
	Bromochlorobenzene	98.0 %

References:

Method 5030B, Purge-and-Trap, Test Methods for Evaluating Solid Waste, SW-846, USEPA,

December 1996.

Method 8021B, Aromatic Volatile Organics, Test Methods for Evaluating Solid Waste, SW-846,

USEPA, December 1996.

Comments:

Drilling Pit Sample.

Analyst

Review



EPA METHOD 8021 AROMATIC VOLATILE ORGANICS

Client:	ConocoPhillips	Project #:	96052-0026
Sample ID:	SJ 27-4 #52N Background	Date Reported:	10-10-08
Laboratory Number:	47597	Date Sampled:	10-01-08
Chain of Custody:	5426	Date Received:	10-02-08
Sample Matrix:	Soil	Date Analyzed:	10-09-08
Preservative:	Cool	Date Extracted:	10-08-08
Condition:	Intact	Analysis Requested:	BTEX

Parameter	Concentration (ug/Kg)	Det. Limit (ug/Kg)	
Benzene	ND	0.9	
Toluene	ND	1.0	
Ethylbenzene	ND	1.0	
p,m-Xylene	ND	1.2	
o-Xylene	ND	0.9	
Total BTEX	ND		

ND - Parameter not detected at the stated detection limit.

Surrogate Recoveries:	Parameter	Percent Recovery
	Fluorobenzene	97.0 %
	1,4-difluorobenzene	97.0 %
	Bromochlorobenzene	97.0 %

References:

Method 5030B, Purge-and-Trap, Test Methods for Evaluating Solid Waste, SW-846, USEPA,

December 1996

Method 8021B, Aromatic Volatile Organics, Test Methods for Evaluating Solid Waste, SW-846,

USEPA, December 1996.

Comments:

Drilling Pit Sample.

Analyst

Review



EPA METHOD 8021 AROMATIC VOLATILE ORGANICS

94.3%

95.3%

133

61.3

46 - 148

46 - 148

Client	N/A	Р	rolect #	1	N/A
Sample ID	10-09-BTEX QA/QC		ate Reported:		10-10-08
Laboratory Number	47590		ate Sampled:		N/A
Sample Matrix	Soil		ate Received		N/A
Preservative	N/A	D	ate Analyzed		10-09-08
Condition	N/A	Α	nalysis:	I	BTEX
Calibration and Detection Limits (ug/L)	I-CaliRF:	C-Cal RF Accept: Range		Blank Conc	Detect. Limit
Benzene	4 9431E+007	4 9530E+007	0.2%	ND	0.1
Toluene	4 1952E+007	4 2036E+007	0.2%	ND	0.1
Ethylbenzene	3 4147E+007	3 4215E+007	0.2%	ND	0.1
p,m-Xylene	7 2367E+007	7 2512E+007	0.2%	ND	0.1
	3 3447E+007	3 3514E+007	0.2%	ND	0.1
o-Xylene			0/Di#		
o-Xylene Duplicate Conc. (ug/Kg) Benzene		Duplicate 4.9	%Diff.	Accept Range	Detect Limit
Duplicate Conc. (ug/Kg)	Sample	Duplicate (>>> > > > > > > > > > > > > > > > > >	Accept Range 0 - 30% 0 - 30%	. 1
Duplicate Conc. (ug/Kg) Benzene Toluene	Sample 2.0	Duplicate	5.0%	0 - 30%	0.9
Duplicate Conc. (ug/Kg) Benzene	Sample 2.0 15.6	Duplicate 1.9	5.0% 0.6%	0 - 30% 0 - 30%	0.9
Duplicate Conc. (ug/Kg) Benzene Toluene Ethylbenzene	Sample 2.0 15.6 4.0	Duplicate 1.9 15.5 3.9	5.0% 0.6% 2.5%	0 - 30% 0 - 30% 0 - 30%	0.9 1.0 1.0
Duplicate Conc. (ug/Kg) Benzene Toluene Ethylbenzene p,m-Xylene	2.0 15.6 4.0 41.3 14.3	Duplicate 1.9 15.5 3.9 41.2	5.0% 0.6% 2.5% 0.2% 1.4%	0 - 30% 0 - 30% 0 - 30% 0 - 30% 0 - 30%	0.9 1.0 1.0 1.2
Duplicate Conc. (ug/Kg) Benzene Toluene Ethylbenzene p,m-Xylene o-Xylene	2.0 15.6 4.0 41.3 14.3	Duplicate 1.9 15.5 3.9 41.2 14.1	5.0% 0.6% 2.5% 0.2% 1.4%	0 - 30% 0 - 30% 0 - 30% 0 - 30% 0 - 30%	0.9 1.0 1.0 1.2 0.9
Duplicate Conc. (ug/Kg) Benzene Toluene Ethylbenzene p,m-Xylene o-Xylene Spike Conc. (ug/Kg)	2.0 15.6 4.0 41.3 14.3	1.9 15.5 3.9 41.2 14.1	5.0% 0.6% 2.5% 0.2% 1.4%	0 - 30% 0 - 30% 0 - 30% 0 - 30% 0 - 30%	0.9 1.0 1.0 1.2 0.9

ND - Parameter not detected at the stated detection limit

References

p,m-Xylene

o-Xylene

Method 5030B, Purge-and-Trap, Test Methods for Evaluating Solid Waste, SW-846, USEPA,

100

50.0

December 1996

Method 8021B, Aromatic and Halogenated Volatiles by Gas Chromatography Using

41.3

14.3

Photoionization and/or Electrolytic Conductivity Detectors, SW-846, USEPA December 1996

Comments:

QA/QC for Samples 47590 - 47599.

Analyst



EPA METHOD 418.1 TOTAL PETROLEUM HYDROCARBONS

Client:	ConocoPhillips	Project #:	96052-0026
Sample ID:	SJ 27-4 #52N	Date Reported:	10-10-08
Laboratory Number:	47596	Date Sampled:	10-01-08
Chain of Custody No:	5426	Date Received:	10-02-08
Sample Matrix:	Soil	Date Extracted:	10-08-08
Preservative:	Cool	Date Analyzed:	10-08-08
Condition:	Intact	Analysis Needed.	TPH-418.1

		Det.
	Concentration	Limit
Parameter	(mg/kg)	(mg/kg)

Total Petroleum Hydrocarbons

347

5.0

ND = Parameter not detected at the stated detection limit.

References:

Method 418.1, Petroleum Hydrocarbons, Total Recoverable, Chemical Analysis of Water

and Waste, USEPA Storet No. 4551, 1978.

Comments:

Drilling Pit Sample.

Analyst

Muster of Weeters Review



EPA METHOD 418.1 TOTAL PETROLEUM HYDROCARBONS

Client:	ConocoPhillips	Project #·	96052-0026
Sample ID:	SJ 27-4 #52N Background	Date Reported.	10-10-08
Laboratory Number:	47597	Date Sampled:	10-01-08
Chain of Custody No:	5426	Date Received:	10-02-08
Sample Matrix:	Soil	Date Extracted:	10-08-08
Preservative:	Cool	Date Analyzed:	10-08-08
Condition:	Intact	Analysis Needed:	TPH-418 1

		Det.
	Concentration	Limit
Parameter	(mg/kg)	(mg/kg)

Total Petroleum Hydrocarbons

36.2

5.0

ND = Parameter not detected at the stated detection limit

References:

Method 418.1, Petroleum Hydrocarbons, Total Recoverable, Chemical Analysis of Water

and Waste, USEPA Storet No. 4551, 1978.

Comments:

Drilling Pit Sample.

Analyst

Peview



EPA METHOD 418.1 TOTAL PETROLEUM HYROCARBONS QUALITY ASSURANCE REPORT

5.9%

+/- 30%

Client [.]		QA/QC		Project #:		N/A
Sample ID:		QA/QC		Date Reported	:	10-10-08
Laboratory Number:		10-08-TPH.QA/QC	47590	Date Sampled.		N/A
Sample Matrix:		Freon-113		Date Analyzed	:	10-08-08
Preservative ⁻		N/A		Date Extracted	l:	10-08-08
Condition.		N/A		Analysis Need	ed:	TPH
Calibration (1)	ैं।-Cal Date 10-06-08	"C-Cal Date 10-08-08	`i-Cal RF ∰ 1,770	1	*	Accept. Range +/- 10%
Blank Conc. (mg	/ K g) :	C	concentration.		Defection Lin	it a said
Duplicate Conc.	(mġ/Kg)"	Salar S	Sample **	, Duplicate	% Difference	Accept Range

Spike Conc. (mg/Kg)	Sample	Spike Added	Spike Result	% Recovery	Accept Range
TPH	241	2.000			80 - 120%

241

ND = Parameter not detected at the stated detection limit.

References: Method 418.1, Petroleum Hydrocarbons, Total Recoverable, Chemical Analysis of Water

and Waste, USEPA Storet No. 4551, 1978.

Comments: QA/QC for Samples 47590 - 47597 and 47663.

Analyst

TPH

Review



Chloride

ConocoPhillips Project #: 96052-0026 Client: SJ 27-4 #52N Date Reported: 10-10-08 Sample ID: Lab ID#: 47596 Date Sampled: 10-01-08 Date Received: 10-02-08 Sample Matrix: Soil Preservative: Cool Date Analyzed: 10-08-08 Condition: Intact Chain of Custody: 5426

Parameter

Concentration (mg/Kg)

Total Chloride

55.0

Reference:

U.S.E.P.A., 4500B, "Methods for Chemical Analysis of Water and Wastes", 1983. Standard Methods For The Examination of Water And Waste Water", 18th ed., 1992

Comments:

Drilling Pit Sample.

Analyst

Mester of Weekles
Review



Chloride

ConocoPhillips	Project #:	96052-0026
SJ 27-4 #52N Background	Date Reported:	10-10-08
47597	Date Sampled:	10-01-08
Soil	Date Received:	10-02-08
Cool	Date Analyzed:	10-08-08
Intact	Chain of Custody:	5426
	47597 Soil Cool	SJ 27-4 #52N Background Date Reported: 47597 Date Sampled: Soil Date Received: Cool Date Analyzed:

Parameter	Concentration (mg/Kg)

Total Chloride

30.0

Reference:

U.S.E.P A., 4500B, "Methods for Chemical Analysis of Water and Wastes", 1983. Standard Methods For The Examination of Water And Waste Water", 18th ed., 1992.

Comments:

Drilling Pit Sample.

Analyst

Review Ceters

State of New Mexico Energy, Minerals and Natural Resources

Form C-105 Ju 17. 2008

| District | 1 | 1625 N French Dr. Hobbs, NM 88240 | District | 17 | 1301 W. Grand Avenue, Artesta NM 88210 | District | 11 | 1000 Rio Brazos Rd., Aziec, NM 87410 |

District IV 1220 S St Francis Dr , Santa Fe, NM 87505

Santa Fe, NM 87505

3 State Oil & Gas Lease No

SF-080670

WELL COMPLETION OR RECOMPLETION REPORT AND LOG

COMPLETION REPORT (Fill in boxes #1 through #31 for State and Fee wells only)									SAN JUAN 27-4 UNIT 6 Well Number									
C-144 CLOS	nd the at					ough #9, #15 D dance with 19					or/	52N			_			
7 Type of Comp	WELL [WORK	OVER	DEEPE	NING	□PLUGBAC	ск 🗆	DIFFE	EREN	IT RESERV	OIR	OTHER_						
8 Name of Oper	ator											9 OGRID 14538						
Burlington R		S OII G	as Com	pany, i	LP_						\dashv	11 Pool name	or V	Vildcat				
PO Box 4298, Farmington, NM 87499																		
12.Location	Unit Ltr	Secti	on	Townsh	ір	Range	Lot			Feet from t	he	N/S Line Feet from the E/W Line Coun					County	
Surface:	,				<u></u>				_									•
BH:									一		寸						-	
13 Date Spudde	d 14 Da	te T D R	eached	15 Da 09/23/		Released	1		16	Date Compl	eted	(Ready to Prod	luce))	17 RT	Elevatı , GR, et	ions (DF	and RKB,
18 Total Measur	ed Depth o	f Well		19 Pl	ug Bac	k Measured De	epth		20	Was Direct	ional	Survey Made?	,	21	Гуре	Electric	c and Ot	her Logs Run
22 Producing In	terval(s), of	f this com	pletion - T	op, Botto	om, Na	me								<u> </u>				
23				(CAS	ING REC	CORI	D (R	epo	ort all str	ing	gs set in w	ell))				
CASING SI	ZE	WEIC	HT LB /F	T		DEPTH SET			НО	LE SIZE		CEMENTIN	G R	ECORD		AM	10UNT	PULLED
	+								····					· · · - · · · · · · · · · · · · · · · ·	+-			
															\dagger			
															İ			
						•												
SIZE	TOP		BOT	TOM	LINI	ER RECORD SACKS CEN		SCR	EEN	25 TUBING RECORD SIZE DEPTH SET PACKE				ED CET				
SIZL	101		1 501	TOM		SACKS CEN	VILIVI	SCR	LELEIN		312	LL		DEPTH SET PACKER SET			SK SE1	
26 Perforation	record (in	terval, sız	e, and nun	nber)				27	ACI	D, SHOT,	FR/	ACTURE, CE						
	-	-						DEP	'IH I	NTERVAL		AMOUNT A	ND	KIND N	ΛΑΊ	ERIAL	USED	
		`																
												<u></u>						
28										ΓΙΟΝ								
Date First Produc	ction				od (Fla	wing, gas lift, j	pumpin	ig - Sizi	e and	d type pump)		Well Status	(Pr	od or Si	hut-i	n)		
Date of Test	Hours	Tested	Cho	Choke Size Prod'n For Oil - Bbl Test Period		Bbl		Gas	as - MCF		Water - Bbl			Gas - Oıl Ratıo				
Flow Tubing Press							r)											
29 Disposition o	f Gas (Sold	l, used for	fuel, vent	ed, etc)									30	Test W	itnes	sed By		
31 List Attachm	ents																	
32 If a temporary pit was used at the well, attach a plat with the location of the temporary pit																		
33 If an on-site l	ourial was i	1	well, repude 36.54	Λ		ation of the on-				027 🖾 1083	1							
I hereby certi	fy that th				nfboth	sides of thi	s form	n is tr	ue a	and compl	ete .	to the best o	f m	y know	led	ge and	d belief	r
Signature																		
E-mail Address marie.e.jaramillo@conocophillips.com																		

ConocoPhillips O

Pit Closure Form:		
Date: 9/17/09		
Well Name: 27-4 52N	`	
Footages:		Jnit Letter: _C
Section: 29 , T-21-N, R-4	W, County: Rio A	-: } State: N.M.
Contractor Closing Pit: Paul	3 Sous	•
Construction Inspector:	Smith	Date: 9/21/09
Inspector/Signature:	2)	, ,

From:

Silverman, Jason M

Sent:

Wednesday, September 09, 2009 1.23 PM

Cc:

Becker, Joey W; Bonilla, Amanda; Bowker, Terry D, Brooks, Jeremy M, Busse, Dollie L; Chavez, Vırgıl E; Crawford, Dale T; Dee, Harry P; Dolly; Kelco, Gillette, Steven L (Gray

Surface Specialties and Consulting, Ltd.); Glen and Michelle Russell

(vectorgr001@msn com); Gordon Chenault; Green, Cary J, GRP:SJBU Production Leads, Hockett, Christy R; hockett52@hotmail com; Johnson, Kirk L; Kennedy, Jim R; Kramme, Jeff L; Kyle, Lopez, Richard A; Medford, Terry L; Montoya, Sheldon C, Mo-Te; Nelson, Terry J, O'Nan, Mike J.; Payne, Wendy F; Peace, James T; Poulson, Mark E; Quint Westcott; Richards, Brian; Ritter, Wayne; Silverman, Jason M, Smith, Randall O; Stamets, Steve A; Stan Mobley; stanjina@msn.com, Steve McGlasson; Thacker; Trujillo, Calvin M, Vasquez, Jennifer G.; Work, Jim A; Blair, Maxwell O; Blakley, Mac; Clark, Joni E; Farrell, Juanita R, Greer, David A; Hines, Derek J (Finney Land Co.), Maxwell, Mary Alice; McWilliams, Peggy L;

Seabolt, Elmo F; Stallsmith, Mark R

Subject:

FW Reclamation Notice . San Juan 27-4 Unit 52N

Importance: High

Attachments: San Juan 27-4 Unit 52N pdf

Paul & Son will move a tractor to the San Juan 27-4 Unit 52N on Monday, September 14th, 2009, to start the Reclamation Process.

Please contact Eric Smith (608-1387) if you have any questions or need further assistance.

Thanks, Jason Silverman

Burlington Resources Well-Network # 10159795 and 10159825

Rio Arriba County, NM:

San Juan 27-4 Unit 52N - Forest surface / Federal minerals

Twinned on San Juan 27-4 Unit 52M 1034 FNL, 1336' FWL

Sec. 29, T27N, R4W

Unit Letter 'D'

Lease #: USA SF-080670

Latitude: 36° 32′ 55.08000″ N (NAD 83)

Longitude: 107° 16′ 41.22000"W

Elevation: 7190.4'
API #: 30-039-30488


Jason Silverman -----Construction Technician
ConocoPhillips Company - SJBU
Projects Team


. P.O. (303 (209) Familington, NM 674994269 --505-326-9821


Jason.M.Silverman@ConocoPhillips.com

ConocoPhillips

Reclamation Form:	
Date: 9/21/69	
Well Name: 27-4#5	2N
Footages: 1034 £N	L 1336 ful Unit Letter: C
Section: 29 , T-21-	N, R-4-W, County: Rio Arribe State: N. M.
Reclamation Contractor:	Paul ? Sons
Reclamation Date:	9/18/09
Road Completion Date:	9/20/09
Seeding Date:	9/20/09
Construction Inspector:	5 ric Sn3 Date: 9/21/09
Inspector Signature:	5-22

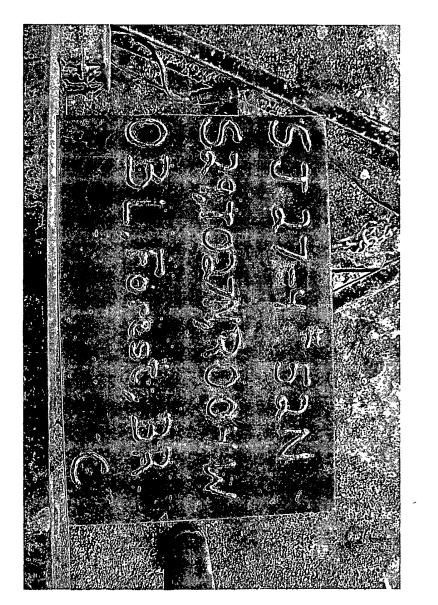

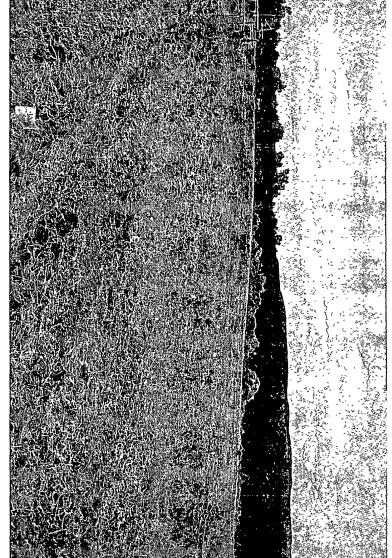

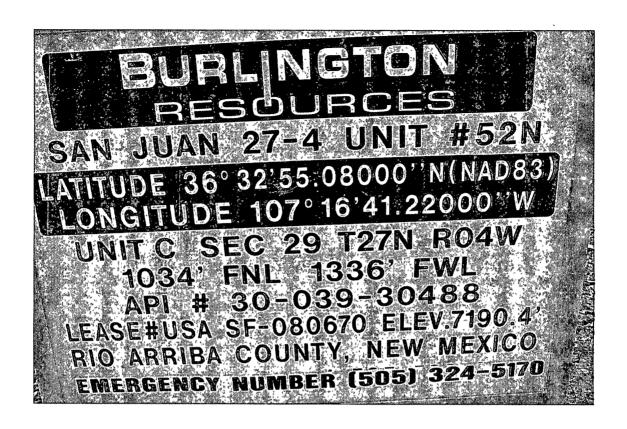



WELL PAD SAFETY AND ENVIRONMENTAL CHECK LIST

WELL NA DATE	ME: San Juan 27-4 INSPECTOR	4 Unit 52N SAFETY CHECK	LOCATION CHECK	PICTURES TAKEN	API#: 30-039-30488 COMMENTS
7/30/08	Rodney Woody	X	X	X	Crossfire to put barbwire on the front side, And ke liner.
8/6/08	Rodney Woody	Χ	Χ	Χ	Pit & loc. Look good
8/13/08	Rodney Woody	X	Χ	Χ	CROSSFIRE TO REPAIR HOLES.
8/20/08	Rodney Woody			Χ	MOTE ON LOC. SETTING SURFACE
8/20/08	Rodney Woody	Χ		Χ	AWS 184 ON LOC.
8/25/08	Rodney Woody	Χ ,		Χ	AWS 184 ON LOC.
9/12/08	Rodney Woody	Χ ,		Χ	H&P 282 ON LOC.
10/6/08	Rodney Woody	X '	Χ	Χ	CROSSFIRE TO KEY LINER.
10/21/08	Rodney Woody	X	Χ	Х	PIT AND LOCATION LOOK GOOD
11/26/08	Rodney Woody	X	Χ	Χ	PIT AND LOCATION LOOK GOOD
1/28/09	Rodney Woody	X	Χ	Χ	CROSSFIRE TO REPAIR FENCE
2/18/09	Rodney Woody	Χ	Χ	Χ	PIT AND LOCATION LOOK GOOD
3/27/09	Art Sanchez	X	X	X	Called Crossfire to repair fence and torn liner in blow it. Notified OCD
4/15/09	Art Sanchez	X	Χ	Χ	,
4/30/09	Jared Chavez	X	Χ	Χ	Location is good JEG
5/7/09	Jared Chavez	X	· X	Χ	Location is good JEG
5/7/09	Jared Chavez	X ,	X	Χ	Location is good JEG
5/21/09	Jared Chavez	X	X	Χ	Location is good JEG
5/29/09	Jared Chavez	X	X	X	Location is good JEG
8/21/09	Elmer Perry	X ;	X	Χ	Sign on location
9/8/09	Elmer Perry	X	X	X	Sign on location, fence needs repaired