

District I
1625 N French Dr., Hobbs, NM 88240
District II
1301 W Grand Avenue, Artesia, NM 88210
District III
1000 Rio Brazos Road, Aztec, NM 87410
District IV
1220 S St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy Minerals and Natural Resources
Department
Oil Conservation Division
1220 South St. Francis Dr.
Santa Fe, NM 87505

Form C-144
July 21, 2008

For temporary pits, closed-loop systems, and below-grade tanks, submit to the appropriate NMOCD District Office
For permanent pits and exceptions submit to the Santa Fe Environmental Bureau office and provide a copy to the appropriate NMOCD District Office.

**Pit, Closed-Loop System, Below-Grade Tank, or
Proposed Alternative Method Permit or Closure Plan Application**

9568

Type of action: Permit of a pit, closed-loop system, below-grade tank, or proposed alternative method
 Closure of a pit, closed-loop system, below-grade tank, or proposed alternative method
 Modification to an existing permit
 Closure plan only submitted for an existing permitted or non-permitted pit, closed-loop system, below-grade tank, or proposed alternative method

Instructions: Please submit one application (Form C-144) per individual pit, closed-loop system, below-grade tank or alternative request

Please be advised that approval of this request does not relieve the operator of liability should operations result in pollution of surface water, ground water or the environment. Nor does approval relieve the operator of its responsibility to comply with any other applicable governmental authority's rules, regulations or ordinances.

1.
Operator: SG Interests I, Ltd. OGRID #: 20572
Address: PO Box 2677, Durango, Colorado 81301
Facility or well name: Federal 21-6-28 #2
API Number: 30-043-21114 OCD Permit Number: _____
U/L or Qtr/Qtr F SENW Section 28 Township 21N Range 06W County: Sandoval, NM
Center of Proposed Design: Latitude 36.02192° N Longitude -107.47739° W NAD: 1927 1983
Surface Owner: Federal State Private Tribal Trust or Indian Allotment

2.
 Pit: Subsection F or G of 19.15.17.11 NMAC
Temporary: Drilling Workover
 Permanent Emergency Cavitation P&A
 Lined Unlined Liner type: Thickness 20 mil LLDPE HDPE PVC Other _____
 String-Reinforced
Liner Seams: Welded Factory Other _____ Volume: 1675 Bbls Dimensions: L 65' x W 40' x D 10'
RCVD FEB 8 '12
OIL CONS. DIV.
DIST. 3

3.
 Closed-loop System: Subsection H of 19.15.17.11 NMAC
Type of Operation: P&A Drilling a new well Workover or Drilling (Applies to activities which require prior approval of a permit or notice of intent)
 Drying Pad Above Ground Steel Tanks Haul-off Bins Other _____
 Lined Unlined Liner type: Thickness _____ mil LLDPE HDPE PVC Other _____
Liner Seams: Welded Factory Other _____

4.
 Below-grade tank: Subsection I of 19.15.17.11 NMAC
Volume: _____ Type of fluid: _____
Tank Construction material: _____
 Secondary containment with leak detection Visible sidewalls, liner, 6-inch lift and automatic overflow shut-off
 Visible sidewalls and liner Visible sidewalls only Other _____
Liner type: Thickness _____ HDPE PVC Other _____

5.
 Alternative Method:
Submittal of an exception request is required Exceptions must be submitted to the Santa Fe Environmental Bureau office for consideration of approval.

6.
Fencing: Subsection D of 19.15.17.11 NMAC (*Applies to permanent pits, temporary pits, and below-grade tanks*)
 Chain link, six feet in height, two strands of barbed wire at top (*Required if located within 1000 feet of a permanent residence, school, hospital, institution or church*)
 Four foot height, four strands of barbed wire evenly spaced between one and four feet
 Alternate. Please specify The pit will be fenced with 4' Hog wire fence with 2 strands barbed wire on top

7.
Netting: Subsection E of 19.15.17.11 NMAC (*Applies to permanent pits and permanent open top tanks*)
 Screen Netting Other _____
 Monthly inspections (If netting or screening is not physically feasible)

8.
Signs: Subsection C of 19.15.17.11 NMAC
 12"x 24", 2" lettering, providing Operator's name, site location, and emergency telephone numbers
 Signed in compliance with 19.15.3.103 NMAC

9.
Administrative Approvals and Exceptions:
 Justifications and/or demonstrations of equivalency are required. Please refer to 19.15.17 NMAC for guidance.
Please check a box if one or more of the following is requested, if not leave blank:
 Administrative approval(s): Requests must be submitted to the appropriate division district or the Santa Fe Environmental Bureau office for consideration of approval.
 Exception(s): Requests must be submitted to the Santa Fe Environmental Bureau office for consideration of approval.

10.
Siting Criteria (regarding permitting): 19.15.17.10 NMAC
Instructions: The applicant must demonstrate compliance for each siting criteria below in the application. Recommendations of acceptable source material are provided below. Requests regarding changes to certain siting criteria may require administrative approval from the appropriate district office or may be considered an exception which must be submitted to the Santa Fe Environmental Bureau office for consideration of approval. Applicant must attach justification for request. Please refer to 19.15.17.10 NMAC for guidance. Siting criteria does not apply to drying pads or above-grade tanks associated with a closed-loop system.

Ground water is less than 50 feet below the bottom of the temporary pit, permanent pit, or below-grade tank. - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No
Within 300 feet of a continuously flowing watercourse, or 200 feet of any other significant watercourse or lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark) - Topographic map; Visual inspection (certification) of the proposed site	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No
Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. (<i>Applies to temporary, emergency, or cavitation pits and below-grade tanks</i>) - Visual inspection (certification) of the proposed site; Aerial photo; Satellite image	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No <input type="checkbox"/> NA
Within 1000 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application (<i>Applies to permanent pits</i>) - Visual inspection (certification) of the proposed site; Aerial photo; Satellite image	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No <input type="checkbox"/> NA
Within 500 horizontal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes, or within 1000 horizontal feet of any other fresh water well or spring, in existence at the time of initial application. - NM Office of the State Engineer - iWATERS database search; Visual inspection (certification) of the proposed site	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No
Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended. - Written confirmation or verification from the municipality; Written approval obtained from the municipality	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No
Within 500 feet of a wetland. - US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No
Within the area overlying a subsurface mine. - Written confirmation or verification or map from the NM EMNRD-Mining and Mineral Division	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No
Within an unstable area - Engineering measures incorporated into the design; NM Bureau of Geology & Mineral Resources; USGS; NM Geological Society, Topographic map	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No
Within a 100-year floodplain. - FEMA map	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No

11.

Temporary Pits, Emergency Pits, and Below-grade Tanks Permit Application Attachment Checklist: Subsection B of 19.15.17.9 NMAC

Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached.

- Hydrogeologic Report (Below-grade Tanks) - based upon the requirements of Paragraph (4) of Subsection B of 19.15.17.9 NMAC
- Hydrogeologic Data (Temporary and Emergency Pits) - based upon the requirements of Paragraph (2) of Subsection B of 19.15.17.9 NMAC
- Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC
- Design Plan - based upon the appropriate requirements of 19.15.17.11 NMAC
- Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC
- Closure Plan (Please complete Boxes 14 through 18, if applicable) - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC and 19.15.17.13 NMAC

Previously Approved Design (attach copy of design) API Number: _____ or Permit Number: _____

12.

Closed-loop Systems Permit Application Attachment Checklist: Subsection B of 19.15.17.9 NMAC

Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached.

- Geologic and Hydrogeologic Data (only for on-site closure) - based upon the requirements of Paragraph (3) of Subsection B of 19.15.17.9
- Siting Criteria Compliance Demonstrations (only for on-site closure) - based upon the appropriate requirements of 19.15.17.10 NMAC
- Design Plan - based upon the appropriate requirements of 19.15.17.11 NMAC
- Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC
- Closure Plan (Please complete Boxes 14 through 18, if applicable) - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC and 19.15.17.13 NMAC

Previously Approved Design (attach copy of design) API Number: _____

Previously Approved Operating and Maintenance Plan API Number: _____ (Applies only to closed-loop system that use above ground steel tanks or haul-off bins and propose to implement waste removal for closure)

13.

Permanent Pits Permit Application Checklist: Subsection B of 19.15.17.9 NMAC

Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached.

- Hydrogeologic Report - based upon the requirements of Paragraph (1) of Subsection B of 19.15.17.9 NMAC
- Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC
- Climatological Factors Assessment
- Certified Engineering Design Plans - based upon the appropriate requirements of 19.15.17.11 NMAC
- Dike Protection and Structural Integrity Design - based upon the appropriate requirements of 19.15.17.11 NMAC
- Leak Detection Design - based upon the appropriate requirements of 19.15.17.11 NMAC
- Liner Specifications and Compatibility Assessment - based upon the appropriate requirements of 19.15.17.11 NMAC
- Quality Control/Quality Assurance Construction and Installation Plan
- Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC
- Freeboard and Overtopping Prevention Plan - based upon the appropriate requirements of 19.15.17.11 NMAC
- Nuisance or Hazardous Odors, including H₂S, Prevention Plan
- Emergency Response Plan
- Oil Field Waste Stream Characterization
- Monitoring and Inspection Plan
- Erosion Control Plan
- Closure Plan - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC and 19.15.17.13 NMAC

14.

Proposed Closure: 19.15.17.13 NMAC

Instructions: Please complete the applicable boxes, Boxes 14 through 18, in regards to the proposed closure plan.

Type: Drilling Workover Emergency Cavitation P&A Permanent Pit Below-grade Tank Closed-loop System Alternative

Proposed Closure Method Waste Excavation and Removal Waste Removal (Closed-loop systems only) On-site Closure Method (Only for temporary pits and closed-loop systems) In-place Burial On-site Trench Burial Alternative Closure Method (Exceptions must be submitted to the Santa Fe Environmental Bureau for consideration)

15.

Waste Excavation and Removal Closure Plan Checklist: (19.15.17.13 NMAC) **Instructions:** Each of the following items must be attached to the closure plan. Please indicate, by a check mark in the box, that the documents are attached.

- Protocols and Procedures - based upon the appropriate requirements of 19.15.17.13 NMAC
- Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of Subsection F of 19.15.17.13 NMAC
- Disposal Facility Name and Permit Number (for liquids, drilling fluids and drill cuttings)
- Soil Backfill and Cover Design Specifications - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC
- Re-vegetation Plan - based upon the appropriate requirements of Subsection I of 19.15.17.13 NMAC
- Site Reclamation Plan - based upon the appropriate requirements of Subsection G of 19.15.17.13 NMAC

16. **Waste Removal Closure For Closed-loop Systems That Utilize Above Ground Steel Tanks or Haul-off Bins Only:** (19.15.17.13 D NMAC)
Instructions: Please identify the facility or facilities for the disposal of liquids, drilling fluids and drill cuttings. Use attachment if more than two facilities are required.

Disposal Facility Name: _____ Disposal Facility Permit Number: _____
 Disposal Facility Name: _____ Disposal Facility Permit Number: _____

Will any of the proposed closed-loop system operations and associated activities occur on or in areas that *will not* be used for future service and operations?
 Yes (If yes, please provide the information below) No

Required for impacted areas which will not be used for future service and operations:

Soil Backfill and Cover Design Specifications - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC
 Re-vegetation Plan - based upon the appropriate requirements of Subsection I of 19.15.17.13 NMAC
 Site Reclamation Plan - based upon the appropriate requirements of Subsection G of 19.15.17.13 NMAC

17. **Siting Criteria (regarding on-site closure methods only):** 19.15.17.10 NMAC
Instructions: Each siting criteria requires a demonstration of compliance in the closure plan. Recommendations of acceptable source material are provided below. Requests regarding changes to certain siting criteria may require administrative approval from the appropriate district office or may be considered an exception which must be submitted to the Santa Fe Environmental Bureau office for consideration of approval. Justifications and/or demonstrations of equivalency are required. Please refer to 19.15.17.10 NMAC for guidance.

Ground water is less than 50 feet below the bottom of the buried waste. - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No <input type="checkbox"/> NA
Ground water is between 50 and 100 feet below the bottom of the buried waste - NM Office of the State Engineer - iWATERS database search, USGS; Data obtained from nearby wells	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No <input type="checkbox"/> NA
Ground water is more than 100 feet below the bottom of the buried waste - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	<input checked="" type="checkbox"/> Yes <input type="checkbox"/> No <input type="checkbox"/> NA
Within 300 feet of a continuously flowing watercourse, or 200 feet of any other significant watercourse or lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark). - Topographic map; Visual inspection (certification) of the proposed site	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No
Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. - Visual inspection (certification) of the proposed site; Aerial photo; Satellite image	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No
Within 500 horizontal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes, or within 1000 horizontal feet of any other fresh water well or spring, in existence at the time of initial application. - NM Office of the State Engineer - iWATERS database, Visual inspection (certification) of the proposed site	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No
Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended. - Written confirmation or verification from the municipality; Written approval obtained from the municipality	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No
Within 500 feet of a wetland. - US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No
Within the area overlying a subsurface mine. - Written confirmation or verification or map from the NM EMNRD-Mining and Mineral Division	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No
Within an unstable area. - Engineering measures incorporated into the design; NM Bureau of Geology & Mineral Resources; USGS; NM Geological Society; Topographic map	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No
Within a 100-year floodplain. - FEMA map	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No

18. **On-Site Closure Plan Checklist:** (19.15.17.13 NMAC) **Instructions:** Each of the following items must be attached to the closure plan. Please indicate, by a check mark in the box, that the documents are attached.

Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC
 Proof of Surface Owner Notice - based upon the appropriate requirements of Subsection F of 19.15.17.13 NMAC
 Construction/Design Plan of Burial Trench (if applicable) based upon the appropriate requirements of 19.15.17.11 NMAC
 Construction/Design Plan of Temporary Pit (for in-place burial of a drying pad) - based upon the appropriate requirements of 19.15.17.11 NMAC
 Protocols and Procedures - based upon the appropriate requirements of 19.15.17.13 NMAC
 Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of Subsection F of 19.15.17.13 NMAC
 Waste Material Sampling Plan - based upon the appropriate requirements of Subsection F of 19.15.17.13 NMAC
 Disposal Facility Name and Permit Number (for liquids, drilling fluids and drill cuttings or in case on-site closure standards cannot be achieved)
 Soil Cover Design - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC
 Re-vegetation Plan - based upon the appropriate requirements of Subsection I of 19.15.17.13 NMAC
 Site Reclamation Plan - based upon the appropriate requirements of Subsection G of 19.15.17.13 NMAC

19.

Operator Application Certification:

I hereby certify that the information submitted with this application is true, accurate and complete to the best of my knowledge and belief.

Name (Print): William Schwab III Title: Agent for SG Interests
Signature: [Handwritten Signature] Date: February 3, 2012
e-mail address: tripp@nikaenergy.com Telephone: 970-759-2701

20.

OCD Approval: Permit Application (including closure plan) Closure Plan (only) OCD Conditions (see attachment)

OCD Representative Signature: [Handwritten Signature] Approval Date: 2/15/2012
Title: Compliance Officer OCD Permit Number: _____

21.

Closure Report (required within 60 days of closure completion): Subsection K of 19.15.17.13 NMAC

Instructions: Operators are required to obtain an approved closure plan prior to implementing any closure activities and submitting the closure report. The closure report is required to be submitted to the division within 60 days of the completion of the closure activities. Please do not complete this section of the form until an approved closure plan has been obtained and the closure activities have been completed.

Closure Completion Date: _____

22.

Closure Method:

Waste Excavation and Removal On-Site Closure Method Alternative Closure Method Waste Removal (Closed-loop systems only)
 If different from approved plan, please explain.

23.

Closure Report Regarding Waste Removal Closure For Closed-loop Systems That Utilize Above Ground Steel Tanks or Haul-off Bins Only:

Instructions: Please identify the facility or facilities for where the liquids, drilling fluids and drill cuttings were disposed. Use attachment if more than two facilities were utilized.

Disposal Facility Name: _____ Disposal Facility Permit Number: _____
Disposal Facility Name: _____ Disposal Facility Permit Number: _____

Were the closed-loop system operations and associated activities performed on or in areas that will not be used for future service and operations?
 Yes (If yes, please demonstrate compliance to the items below) No

Required for impacted areas which will not be used for future service and operations:

- Site Reclamation (Photo Documentation)
- Soil Backfilling and Cover Installation
- Re-vegetation Application Rates and Seeding Technique

24.

Closure Report Attachment Checklist: Instructions: Each of the following items must be attached to the closure report. Please indicate, by a check mark in the box, that the documents are attached.

- Proof of Closure Notice (surface owner and division)
- Proof of Deed Notice (required for on-site closure)
- Plot Plan (for on-site closures and temporary pits)
- Confirmation Sampling Analytical Results (if applicable)
- Waste Material Sampling Analytical Results (required for on-site closure)
- Disposal Facility Name and Permit Number
- Soil Backfilling and Cover Installation
- Re-vegetation Application Rates and Seeding Technique
- Site Reclamation (Photo Documentation)

On-site Closure Location: Latitude _____ Longitude _____ NAD: 1927 1983

25.

Operator Closure Certification:

I hereby certify that the information and attachments submitted with this closure report is true, accurate and complete to the best of my knowledge and belief. I also certify that the closure complies with all applicable closure requirements and conditions specified in the approved closure plan

Name (Print): _____ Title: _____
Signature: _____ Date: _____
e-mail address: _____ Telephone: _____

District I
1625 N. French Dr, Hobbs, NM 88240
District II
1301 W. Grand Avenue, Artesia, NM 88210
District III
1000 Rio Brazos Rd., Aztec, NM 87410
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy, Minerals & Natural Resources Department
OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

Form C-102
Revised October 12, 2005
Submit to Appropriate District Office
State Lease - 4 Copies
Fee Lease - 3 Copies

AMENDED REPORT

WELL LOCATION AND ACREAGE DEDICATION PLAT

¹ API Number		² Pool Code 71629		³ Pool Name Basin Fruitland Coal	
⁴ Property Code 35512		⁵ Property Name FEDERAL 21-6-28			⁶ Well Number 2
⁷ OGRID No 20572		⁸ Operator Name SG INTERESTS I, LTD.			⁹ Elevation 6880

¹⁰ Surface Location


UL or Lot No	Section	Township	Range	Lot Idn.	Feet from the	North/South Line	Feet from the	East/West Line	County
F	28	21 N	6 W		2510	North	1980	West	Sandoval

¹¹ Bottom Hole Location If Different From Surface


UL or Lot No.	Section	Township	Range	Lot Idn.	Feet from the	North/South Line	Feet from the	East/West Line	County
---------------	---------	----------	-------	----------	---------------	------------------	---------------	----------------	--------

¹² Dedicated Acres 320 (W/2)	¹³ Joint or Infill	¹⁴ Consolidation Code	¹⁵ Order No
--	-------------------------------	----------------------------------	------------------------

No allowable will be assigned to this completion until all interests have been consolidated or a non-standard unit has been approved by the division.

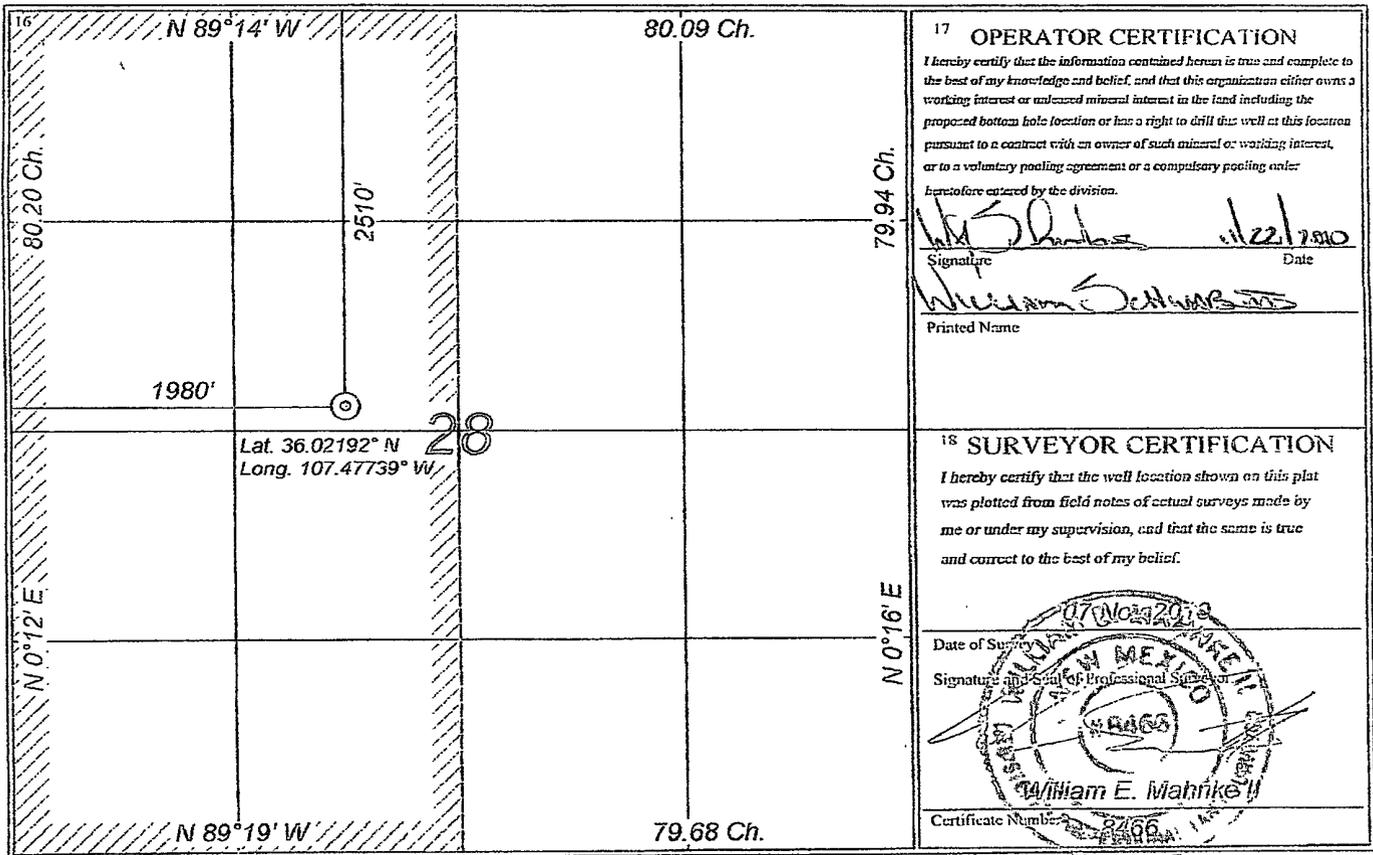

Bearings shown are from BLM Plat

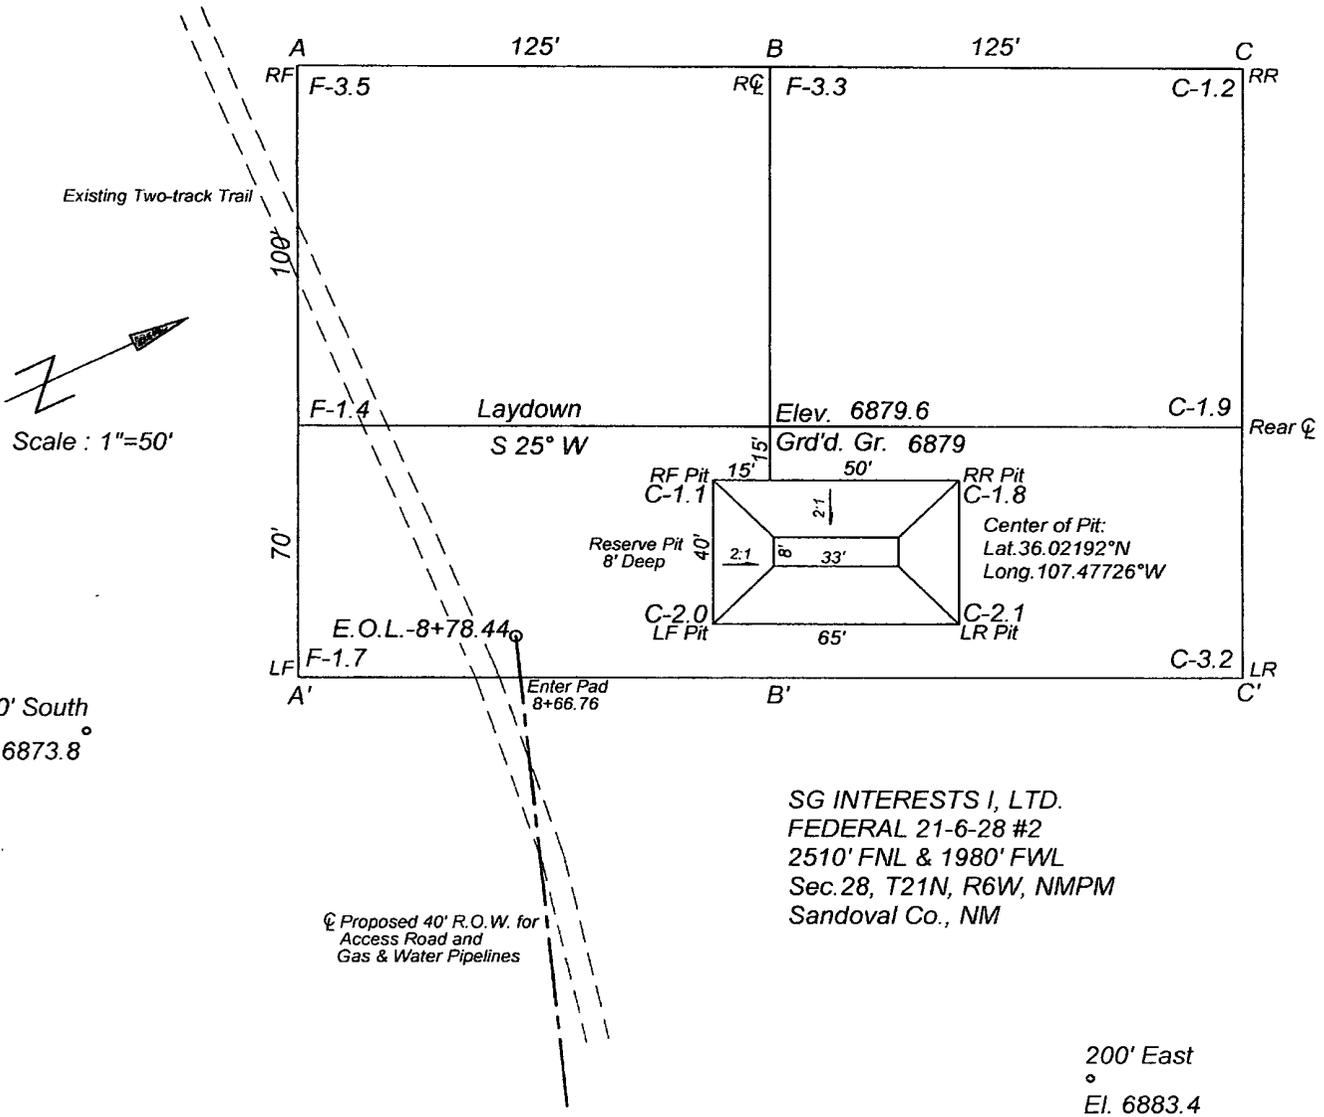

SG INTERESTS I, LTD.
 FEDERAL 21-6-28 #2
 2510' FNL & 1980' FWL
 Sec. 28, T21N, R6W, NMPM
 Sandoval Co., NM

A-A' Vert.: 1"=30' Horiz.: 1"=50' ☉

6880						
6870						

B-B'

6880						
6870						

C-C'


6880						
6870						

FEDERAL 21-6-28 #2

107°30'00" W

107°29'00" W

WGS84 107°28'00" W

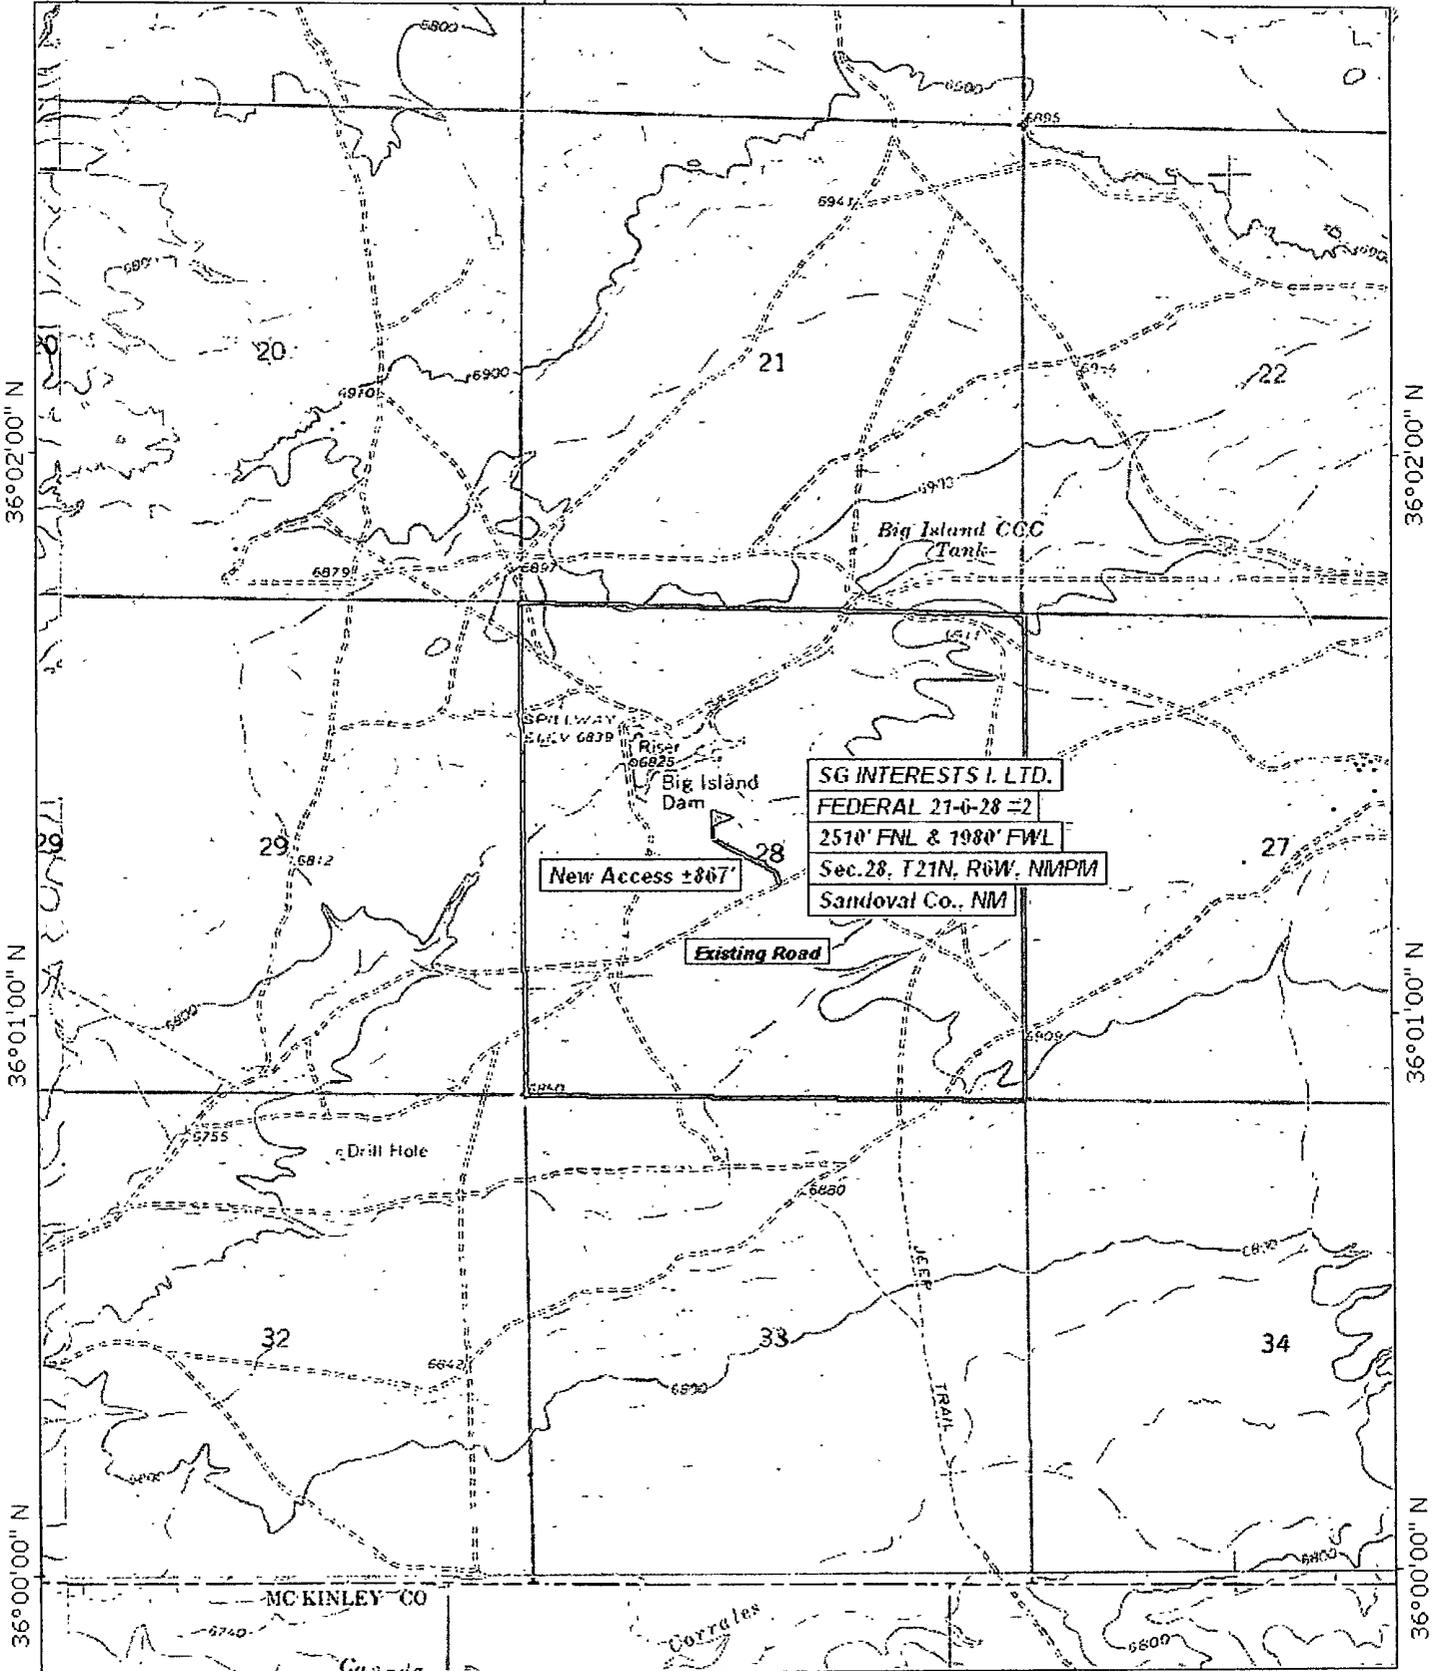


107°30'00" W


107°29'00" W

WGS84 107°28'00" W

TN MN
10 1/2°



Map created with TOPO! © 2003 National Geographic (www.nationalgeographic.com/topo)



ENERGY SURVEYORS, INC.

**P.O. Box 991
Farmington, NM 87499**

e-mail: surveyor_nm@yahoo.com

Phone: 505-360-8142

Access Description for Federal 21-6-28 #2

From Counselor Trading Post on U.S. Hwy. 550, travel south on U.S. 550 ± 0.1 miles, turn right on dirt road with sign "Star Lake Compressor-26 miles". This is the 0 miles point for this description. Follow dirt road (Rd. #46),

9.0 miles- Turn left on to a main road ± 300 past a pipeline corridor,

13.0 miles- Turn left at water wells,

14.0 miles- At top of hill, take right fork,

15.4 miles- Turn left, continue easterly through Fed.21-6-29 #4 well pad, uphill through Fed.21-6-28 #3 well pad,

16.6 miles- Turn left off road and follow flagged access along existing two-track trail ± 867 feet to location.

Tripp Schwab

From: Tripp Schwab [tripp@nikaenergy.com]

Sent: Friday, February 03, 2012 3:22 PM

To: Mark Kelly (mark_kelly@nm.blm.gov)

Subject: Landowner Notification

Re: Federal 21-6-28 #2, API 30-043-21114

Mark,

The requirements of the OCD pit rule 17 requires notification to the surface owner that we are planning to open a temporary drilling pit on the subject location. After drilling operations cease, the pit will then be closed. SGI plans to close the temporary pit per approved Federal APD and NMOCD rules.

Please let me know if you have any questions or if this e-mail notification needs to be directed to someone else.

Thank you for your time .

Tripp Schwab

Nika Energy - Agent for SG Interests

970-259-2701 office

970-385-1598 fax

2/3/2012

Tripp Schwab

From: Mail Delivery System [MAILER-DAEMON@mail.brainstorminternet.net]
Sent: Friday, February 03, 2012 3:22 PM
To: tripp@nikaenergy.com
Subject: Successful Mail Delivery Report

Attachments: details.txt; Message Headers.txt



details.txt (510 B)



Message
Headers.txt (1 KB)

This is the mail system at host mail.brainstorminternet.net.

Your message was successfully delivered to the destination(s) listed below. If the message was delivered to mailbox you will receive no further notifications. Otherwise you may still receive notifications of mail delivery errors from other systems.

The mail system

<mark_kelly@nm.blm.gov>: delivery via relay[68.168.100.63]:25: 250 Ok: queued
as 01CEBE9AB638

Information from ESET NOD32 Antivirus, version of virus signature database 6856
(20120203)

The message was checked by ESET NOD32 Antivirus.

<http://www.eset.com>

Nika Energy Operating

Mark Kelly
Bureau Of Land Management, DOI
Farmington Field Office
1235 La Plata Highway, Suite A
Farmington, NM 87401

February 3, 2012

RE: Federal 21-6-28 #2, API # 30-043-21114

Mark,

This is a follow up certified letter, to the e-mail, as per the requirements of the new OCD pit rule 17 requiring notification to the surface owner that we are planning to close a temporary drilling pit on the subject location. After drilling operations cease, SGI plans to close the temporary pit per the approved APD and the new NMOCD rules.

Please let me know if you have any questions or if this notification needs to be directed to someone else.

Thank you for your time.



Tripp Schwab
President
Nika Energy Operating, LLC
Agent for SG Interests.

U.S. Postal Service
CERTIFIED MAIL RECEIPT
(Domestic Mail Only; No Insurance Coverage Provided)

For delivery information, visit our website at www.usps.com

OFFICIAL USE

Postage	\$ 0.45
Certified Fee	\$ 2.75
Return Receipt Fee (Endorsement Required)	\$ 2.53
Restricted Delivery Fee (Endorsement Required)	\$ 0.00
Total Postage & F	\$ 5.73

Postmark Here
FEB 03 2012
DURANGO CO, CO
USPS

Sent To
Bureau of Land Management
1235 LaPlata Highway
Farmington, NM 87401

PS Form 3800, August 2006 See Reverse for Instructions

7010 3090 0002 9927 8593



Federal 21-6-28 #2

Federal 21-6-28 #2

(The circle indicates a 500' radius from the location)

The proposed temporary drilling pit is not

within 300 feet of a continuously flowing watercourse or 200 feet of any other

significant watercourse or lake bed, sinkhole, or dry lake.

within 300 feet of a permanent residence, school, hospital, institution or church.

within 500 feet of a private domestic water well.


within incorporated municipal boundaries.

within 500 feet of a wetland.

Image NMR GIS

© 2011 Google

Image © 2011 DigitalGlobe



Google

Hydrogeology Report for the SG Interests Federal 21-6-28 #2

The Federal 21-6-28 #2 located in Sandoval County, is in the upper southeastern reaches of the San Juan River drainage basin and in the San Juan Underground Water Basin as defined by the New Mexico Office of the State Engineer. The surface is covered by Quaternary alluvium consisting of unconsolidated sand, gravel, silt, clay, and terrace gravel and boulder deposits. The alluvium itself is not a source for ground water. The consolidated rock outcrops along the drainage are the Tertiary Age Paleocene Nacimiento Formation which underlies the alluvium. The Nacimineto Formation is a stratified fluvial sand and shale sequence less than 200 feet thick.

The aquifer in this area of the San Juan Basin primarily consists of the Ojo Alamo Sandstone. The top of the Ojo Alamo at this drill site is estimated to be approximately 285 feet below the surface. The Ojo Alamo is a permeable conglomerate and medium to very coarse sandstone inter-layered with relatively impermeable shale. This aquifer contains fresh to moderately saline water. Dissolved-solids concentrations generally increase along the groundwater flow path from less than 1,000 milligrams per liter near recharge areas to about 4,000 as the formation is deeper into the basin.

The proposed well, Federal 21-6-28 #2, is located in the SENW quarter-quarter of section 28 T21N- R6W. Ground level elevation at this site is at 6880'. The approximate elevation of the water bearing formation is 6595'. No groundwater wells were identified within a mile radius of this location using the iWaters Database from the Office of the State Engineers. The closest known water well (POD #SJ 01704) is located over 4.5 miles to the east southeast. This water well found water at 229 ft with a TD of 506 ft. The well is being pumped by a windmill.

Water Well Locations in Subject Area

Location (T, R, Section)	POD Number	Well Depth	Depth to Water	Water Column
21N 07W Sec 07	SJ 01824	100'	n/a	n/a
21N 07W Sec 07	SJ 03562	680'	240'	440'
20N 07W Sec 17	RG 38729	252'	110'	142'
20N 07W Sec 16	SJ 01415	512'	40'	472'
20N 07W Sec 22	SJ01416	15'	5'	10'
20N 07W Sec 22	SJ 01417	620'	10'	610'
20N 07W Sec 22	SJ 01418	20'	5'	15'
20N 07W Sec 34	SJ 01419	350'	30'	320'
20N 07W Sec 08	SJ 01705	125'	88'	37'
20N 07W Sec 34	SJ 02615	360'	200'	160'
20N 06W Sec 32	SJ 00119	5007'	180'	4827'
20N 06W Sec 32	SJ 00119 Explore-1	5656'	255'	5401'
20N 06W Sec 11	SJ 01704	506'	229'	277'
20N 05W Sec 22	RG 91231 POD-1	143'	78'	65'
21N 05W Sec 32	RG 29678	2238'	769'	1469'

Reference:

GROUND WATER ATLAS of the UNITED STATES Arizona, Colorado, New Mexico, Utah, HA 730-C, USGS, S.G. Robson and E.R. Banta, 1995

iWaters (Waters Database), New Mexico Office of the State Engineer, 2007

Wetlands Certification

RE: Federal 21-6-28 #2

I William Schwab III, Agent for SG Interests, certify that I have visually inspected the above well, and that there are no wetlands with in a 500 foot radius.

There is no data available from the US Fish and Wildlife identification map (attached) as to the existence of a wetland.



Signature: 

Date: August 1, 2011

Unstable Area

RE: Federal 21-6-28 #1

The well pad is not located near any surface mines or over any subsurface mines. The Soil consists of a clay sand mixture. The location has a 4' cut and a 3' fill. The temporary drilling pit will be located in the cut of the cut side of the location.

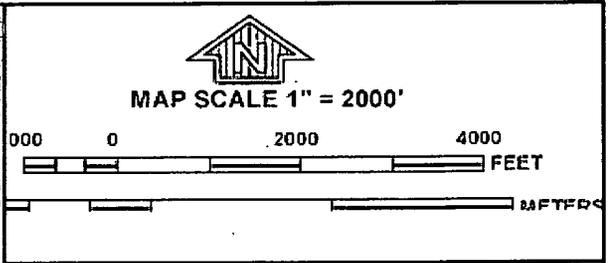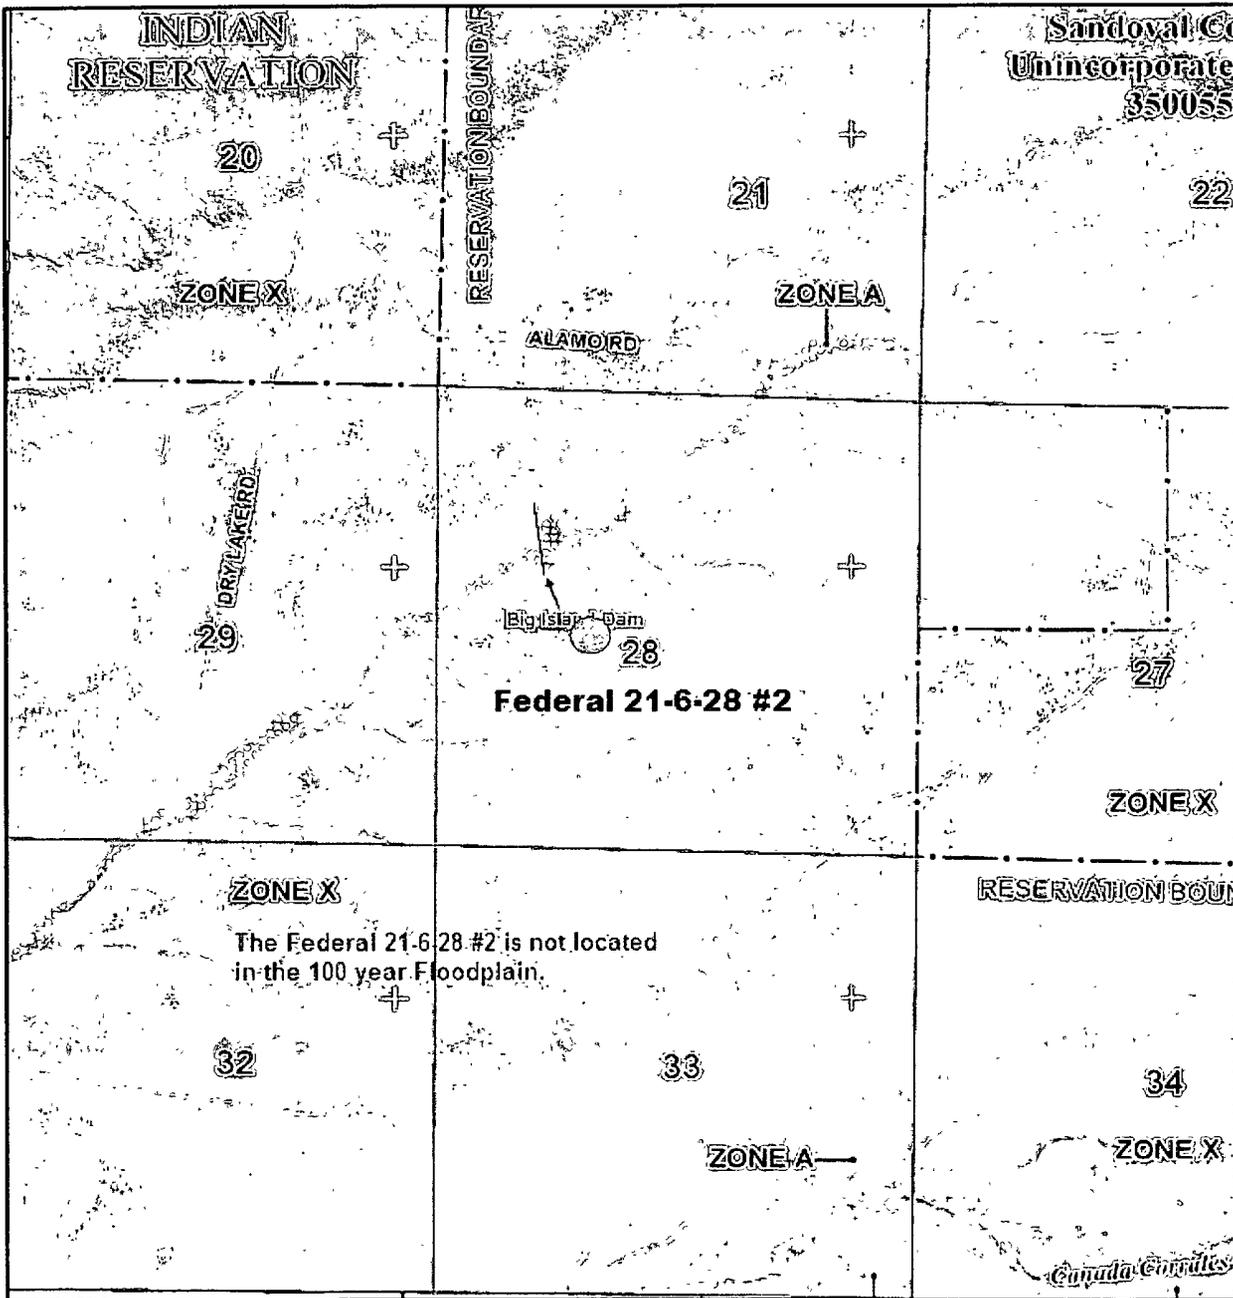

PANEL 0250D

FIRM
FLOOD INSURANCE RATE MAP
SANDOVAL COUNTY,
NEW MEXICO
AND INCORPORATED AREAS

PANEL 250 OF 2225
(SEE MAP INDEX FOR FIRM PANEL LAYOUT)

CONTAINS:

COMMUNITY	NUMBER	PANEL	SUFFIX
SANDOVAL COUNTY			
UNINCORPORATED AREAS	350056	0250	D

Notice to User: The Map Number shown herein should be used when placing map orders. The Community Number shown above should be used on most size applications for the subject community.


MAP NUMBER
 35043C0250D
MAP REVISED
 MARCH 18, 2008
 Federal Emergency Management Agency

This is an official copy of a portion of the above referenced flood map. It was extracted using F-MIT On-Line. This map does not reflect changes or amendments which may have been made subsequent to the date on the title block. For the latest product information about National Flood Insurance Program flood maps check the FEMA Flood Map Store at www.msc.fema.gov


SG Interests I, Ltd.

Temporary Pit Design & Construction Plan

Re: Federal 21-6-28 #2

- 1 - SG Interests will design and construct a temporary pit to contain liquids, solids, prevent contamination of fresh water, and protect public health and environment.
- 2 - Prior to constructing the pit, topsoil will be stockpiled per APD for later use in reclamation.
- 3 - SGI will have sign on location in compliance with 19.15.3.103 NMAC.
- 4 - SGI shall construct all new fences utilizing 48" hog wire on bottom with a single strand of barbed wire on top. T-posts will be installed a minimum of every 12 feet and corners will be braced. Temporary pits will be fenced at all times except during drilling or workover operations when the rig side of the fence will be temporarily removed for operational purposes.
- 5 - SGI shall construct the temporary pit so the foundation and interior slopes are compact, free of rocks, debris, sharp edges and irregularities to prevent liner failure.
- 6 - SGI shall construct the pit so the slopes are no steeper than two horizontal feet to one vertical foot. Any other design will be submitted for administrative approval.
- 7 - All temporary pits will be lined with a 20 mil string reinforced, LLDPE liner, complying with EPA SW-846 method 9090A requirements.
- 8 - Geotextile will be installed beneath the liner if integrity will be compromised from sharp edges or irregularities.
- 9 - Liner will be anchored in the bottom of a compacted earth filled trench at least eighteen inches deep.
- 10 - Liner seams will be minimized and oriented up and down, not cross slope. Factory seams will be used wherever possible. Field seams will be overlapped four to six inches and welded by qualified personnel. Seams will be minimized in corners and irregularly shaped areas.
- 11 - The liner shall be protected from any fluid force through the use of mud pit slides or a manifold system.
- 12 - Diversion ditches and berms will be used to prevent natural runoff from entering pit.
- 13 - Pit volume will not exceed 10 acre feet, including freeboard.
- 14 - Temporary blow pits will be constructed to allow fluid discharged to unlined pit, as allowed by Rule 19.15.17.11.F.11, to gravity flow into lined pit.
- 15 - Freestanding liquids will not be allowed in unlined portion of a temporary blow pit.

Temporary Pit Design - Federal 21-6-28 #2.xls

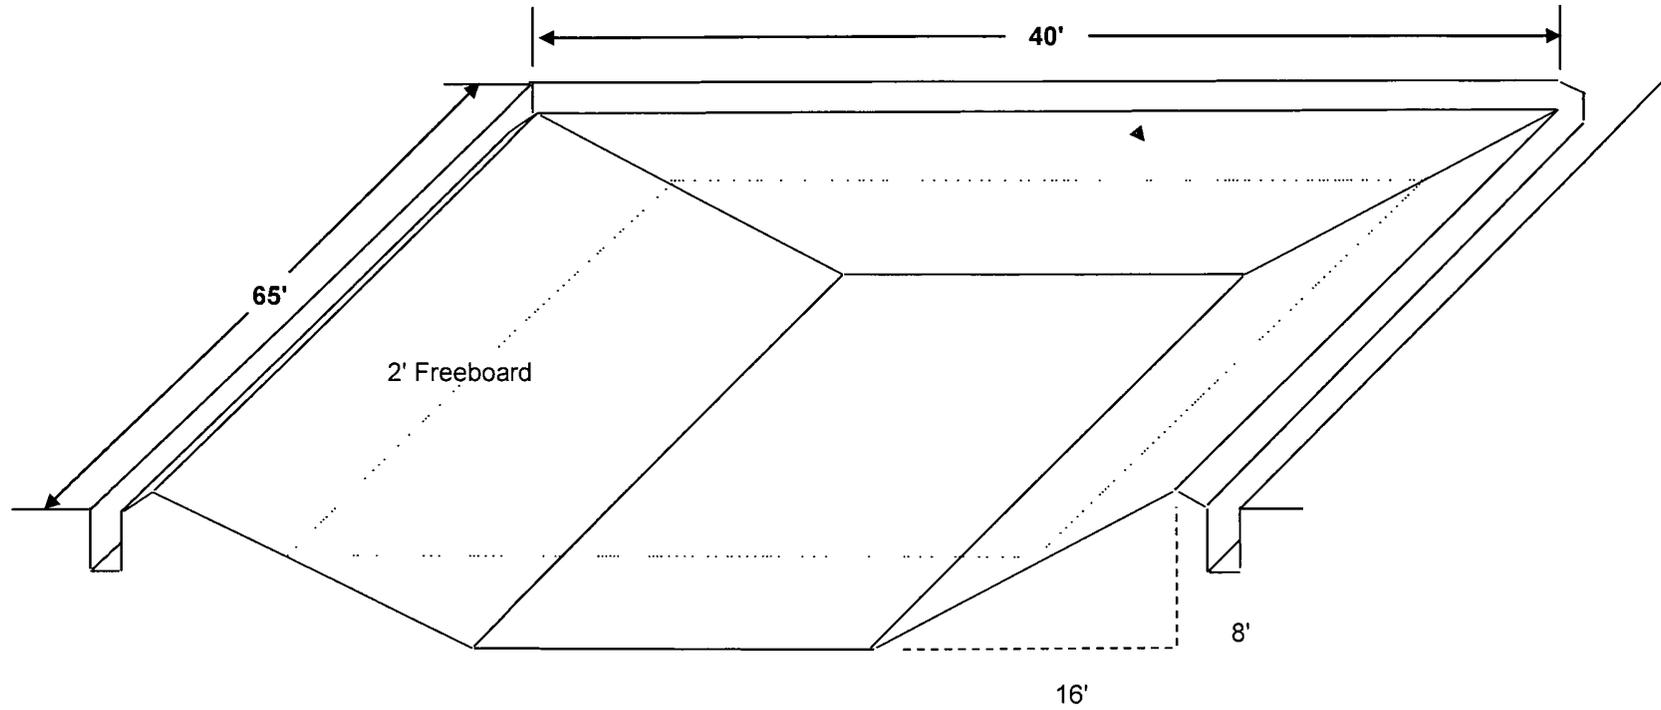

Pit to be lined with 20 mil LLDPE Material

Liner will be anchored in anchor ditch

SG Interests I, Ltd.

Temporary Pit - Maintenance & Operating Plan

Re: Federal 21-6-28 #2

- 1 - SG Interests will design and construct a temporary pit to contain liquids, solids, prevent contamination of fresh water, and protect public health and environment.
- 2 - SGI will dispose of drilling fluids at Basin Disposal Inc., Permit # NM-01-005.
- 3 - SGI will not dispose of or store any hazardous waste in any temporary pit.
- 4 - If the pit liner's integrity is compromised, or if any penetration of the liner occurs above the liquid surface, the NMOCD Aztec Division office will be notified by phone or e-mail within forty eight hours.
- 5 - If a leak develops below the liquid level SGI shall remove all liquids above the damaged liner within forty eight hours and repair the damage to the liner. For leaks less than 25 Bbls SGI shall notify the NMOCD Aztec office within forty eight hours of the discovery. For leaks greater than 25 Bbls SGI shall notify the NMOCD Aztec office within twenty four hours of the discovery. In addition verbal notification shall be given to the divisions Environmental Bureau Chief.
- 6 - The liner shall be protected from any fluid force through the use of mud pit slides or a manifold system.
- 7 - Diversion ditches and berms will be used to prevent natural runoff from entering pit.
- 8 - SGI shall immediately remove any visible layer of oil from the surface of the temporary pit. An oil absorbent boom will be used to contain and remove oil from the pits surface. An oil absorbent boom will be kept on-site until closure of pit.
- 9 - Only fluids generated during the drilling or completion process will be discharged into a temporary pit.
- 10 - The pit will be kept free of miscellaneous solid waste and or debris.
- 11 - During drilling or completion operations, SGI will inspect the temporary pit at least once daily to insure compliance with this plan. Inspections will be logged in the IADC reports and SGI daily drilling reports. These reports will be filed with the NMOCD Aztec Division office upon closure of the pit.
- 12 - After drilling or completion operations, SGI will inspect the temporary pit at least once weekly so long as liquids are present in the pit. Inspections will be logged as a continuation of the SGI daily drilling report and will be filed with the NMOCD Aztec Division office upon closure of the pit.
- 13 - The temporary pit shall always maintain a minimum of two feet of freeboard.
- 14 - Freestanding liquids will be removed from a temporary pit within 30 days from the date the drilling rig is released and removed as needed thereafter until the pit is closed.
- 15 - SGI will remove all freestanding liquids from a cavitation pit within 48 hours after completing a cavitation. SGI may request additional time to remove liquids from the NMOCD Aztec Division office if SGI is not able to remove liquids in 48 hours.

SG Interests I, Ltd.

Temporary Pit - Closure Plan

Re: Federal 21-6-28 #2

All closure activities will include proper documentation and be available for review upon request and will be submitted to the NMOCD Aztec Division office within 60 days of pit closure. Closure report will be filed on form C-144 and incorporate the following:

Details on capping and covering (where applicable)
Plot Plan (Pit Diagram)
Inspection Reports
Sampling Results
C-105

- 1 - All freestanding liquids will be removed at the start of the pit closure process from the pit and disposed of in a division approved facility or recycle, re-use or reclaim the liquids in a manner that the appropriate division district office approves. SGI plans to dispose of drilling fluids at Basin Disposal Inc., Permit # NM-01-005, unless otherwise noted.
- 2 - The method of closure for all temporary pits will be on-site burial as long as all the criteria listed in sub-section B of 19.15.17.13 NMAC are met.
- 3 - The surface owner shall be notified of SGI closure plan using a means that provides proof of notice i.e., certified mail, return receipt requested or electronic mail with read receipt.
- 4 - Temporary pits will be closed, re-contoured, and re-seeded 6 months after drilling rig is released.
- 5 - "Notice of Closure" will be given to the NMOCD Aztec Division office within 72 hours of closure via electronic mail or verbally. The "Notification of Closure" will include:
 - i. Operators Name
 - ii. Location by Unit Letter, Section, Township, and Range
 - iii. Well Name and API number.
- 6 - A five point composite sample will be taken of the pit using sampling tools and tested per 19.15.17.13.B.1.b. NMAC. Maximum limits for on-site burial are listed below:

Components	Test Method	Limit (mg/kg)
Benzene	EPA SW-846 8021B or 8260B	0.2
BTEX	EPA SW 846 8021B or 8260B	50
TPH	EPA SW 846 418.1	2500
GRO/DRO	EPA SW 846 8015M	500
Chlorides	EPA 300.1	1000

In the event the criteria are not met all contents and remediation will be handled per 19.15.17.13.B.1 NMAC. If ground water is 50'-100' below the bottom of the buried waste all limits are the same except the chloride limit is reduced to 500 mg/kg. The sampling can be taken prior to mixing but if the contents exceed the parameters then contents must be sampled after mixing and meet the criteria before closure.

- 7 - Pit contents shall be mixed with non waste containing earth material in order to achieve the solidification process. The solidification process will be accomplished using a combination of natural drying and mechanical mixing. Pit contents will be mixed with non waste, earth material to a consistency that is deemed safe and stable. The mixing ratio shall not exceed 3 parts clean soil to 1 part pit contents.
- 8 - Liner of temporary pit will be removed above "mud level" after stabilization. Liner will be cut and all excessive liner will be removed and taken to a licensed disposal facility.
- 9 - Upon completion of solidification and satisfactory test results the pit area will be backfilled and compacted with non-waste earth material. A minimum of four feet of cover with the top foot (or background thickness of topsoil whichever is greater) suitable to establish vegetation at the site.
- 10 - The pit cover will be re-contoured and re-vegetated complying with subsections G,H,&I of 19.15.17.13 NMAC.
- 11 - Notification will be sent to NMOCD Aztec Division office when reseeding is completed.
- 12 - SGI will seed the disturbed areas the first growing season after the operator closes the pit. Seeding will be accomplished by drilling on the contour whenever practical or by other division approved methods. APD stipulated seed mixes will be used on Federal lands. Vegetative cover will equal 70% of the native perennial vegetative cover (un-impacted) consisting of at least three native plant species, including at least one grass, but not including noxious weeds. Seed cover will be maintained thru two consecutive growing seasons. Repeat seeding or planting will be continued until successive vegetative growth occurs.
- 13 - The closed temporary pit will have a steel marker no less than four inches in diameter, extending four feet above mean ground level, extending and cemented in a hole three feet deep, in the center of the onsite burial upon completion of the closing. The marker will be permanently welded, stamped or engraved to include the operator name, lease name, well name and number, unit number, section, township, range, and indicator that the marker is an onsite burial location. SGI reserves the right to install a temporary flat plate marker, one foot by two feet, with the same information if it is deemed necessary for safe operation on the wellsite during the productive life of the well. A full size marker will then be installed upon final abandonment.