


API / UWI 3003923501		Surface Legal Location NMPM.026-030N-006W		Field Name WILDCAT		License No.		Well Configuration Type	
Ground Elevation (ft) 6,675.00	Orig KB/RT (ft) 6,695.00	KB-Grd (ft) 20.00	KB-CF (ft)	KB-TF (ft)	Other Elevation Type		Other Elevation (ft)		

Well Config: - Original Hole: 7/22/2010 9:25:07 AM
ftKB (MD) Schematic Actual

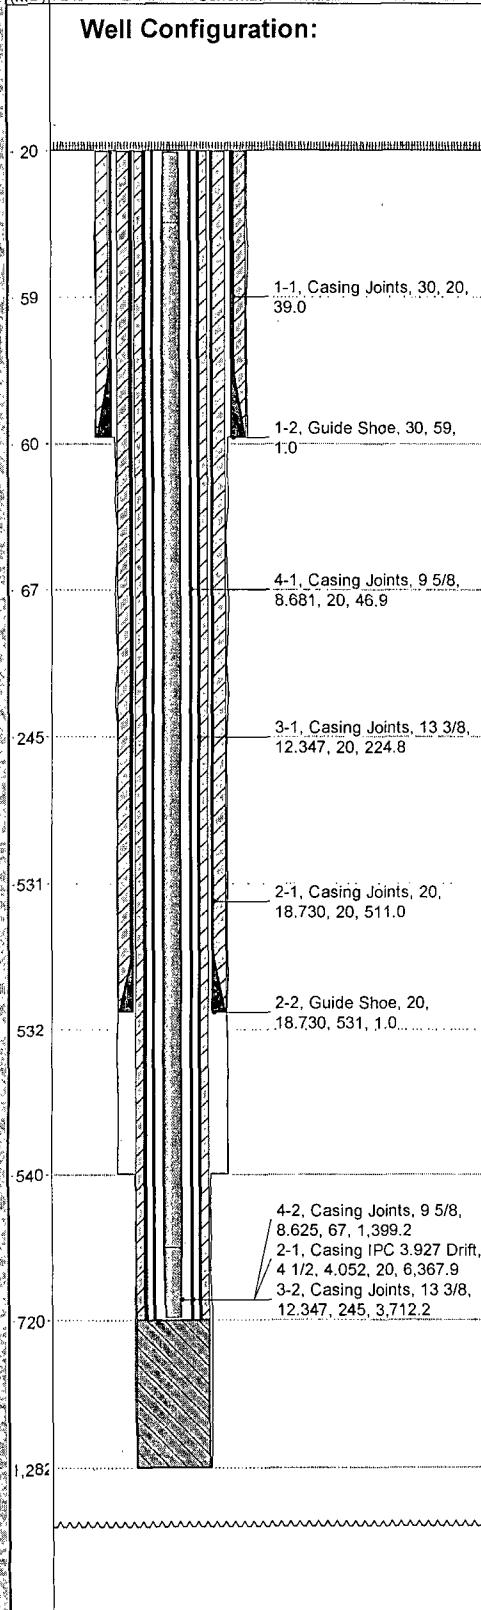

WELLHEADS

Type	Install Date				
Description	Make	Model	WP (psi)	Top Ring Gasket	Min Bore (in)

CASING STRINGS

Casing Description	String OD (in)	String Wt (lbs/ft)	String Grade	String Top Thrd	Set Depth (ftKB)
Conductor	30	94.00			60.0
Surface	20	133.00	K-55		532.0
Intermediate 1	13 3/8	72.00	N-80		4,040.1
Intermediate 2	9 5/8	62.80	CS-95		8,105.0
Liner	7	38.00	S-95		14,026.0

Depth (ftKB)	KO MD (ftKB)	TD (max) (ftKB)
720.0		14,030.0

PERFORATIONS

Date	Top (ftKB)	Botm (ftKB)	Zone	Current Status
9/18/1986	8,221.0	8,468.0		
9/1/1986	8,520.0	8,880.0		
8/23/1986	9,052.0	9,245.0		
8/23/1986	9,310.0	9,310.0		
5/29/1985	13,195.0	13,214.0		

TUBING STRING

Tubing Description	Run Date	Pull Date	String Length (ft)	Set Depth (ftKB)
Tubing - Water Injection	8/19/2009		8,173.86	8,193.9

Comment


Qts	Item Description	OD Nominal (in)	Nominal ID (in)	Wt (lbs/ft)	Grade	Make	Model	Len (ft)	Top (ftKB)
153	Casing IPC 3.927 Drift	4 1/2	4.052	10.50	J-55			6,367.91	20.0
43	Casing IPC 3.875 Drift	4 1/2	4.000	11.60	J-55			1,739.84	6,387.9
1	F-nipple	4 1/2	3.810					1.35	8,127.8
1	Casing IPC 3.875 Drift	4 1/2	4.000	11.60	J-55			42.51	8,129.1
1	Baker 83 FA 47 Packer	4 1/2	4.000					3.70	8,171.6
1	X-over Bushing	4 1/2	4.000					0.45	8,175.3
1	Casing Pup IPC	4 1/2	4.000	11.60	J-55			9.00	8,175.8
1	F-nipple	4 1/2	3.750					1.35	8,184.8
1	Casing Pup IPC	4 1/2	4.000	11.60	J-55			6.00	8,186.1
1	R-nipple	4 1/2	3.750					1.25	8,192.1
1	Wireline Re-entry Guide	4 1/2	4.000					0.50	8,193.4

DIST. 3

OIL CONS. DIV.

RCVD SEP 9 '14

P

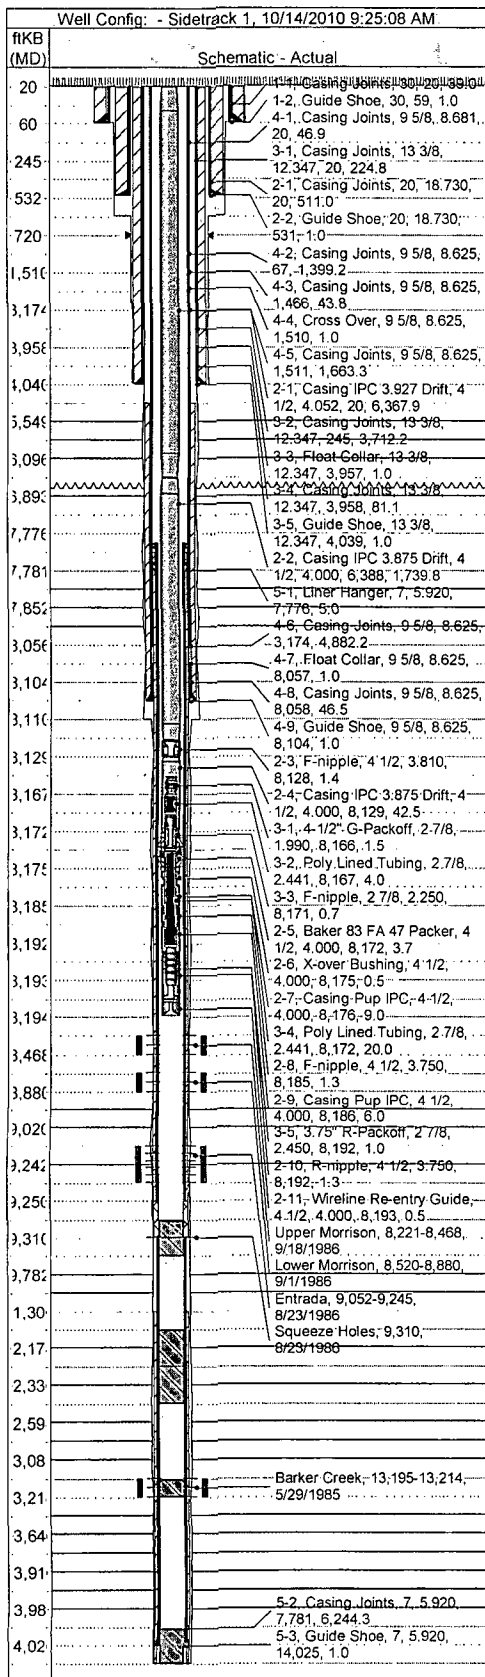

DIST. 3

OIL CONS. DIV.

RCVD SEP 9 '14