

API 30-045-07171



GCU 165-DK
Dakota
API #: 30-045-26222
Sec 29 - T28N - R12W
San Juan County, NM

Well History


5/27/64: Spud date
7/8/64: Completion date
Well was Cored (5/1964)
Well Servicing (1/13/2005) - Cleanout Fill
Well Servicing (9/15/2008) - Cleanout, New Tbg
9/12/2013: C/O

FORMATION TOPS

Pictured Clif	1300
Lewis	1450
Mesaverde	2205
Gallup	4922
Dakota	5906

X-nipple @ 5935 (1.875" ID)
F-nipple @ 5941 (1.78" ID)
Tubing Depth
5942

Ground Elevation
5599 KB

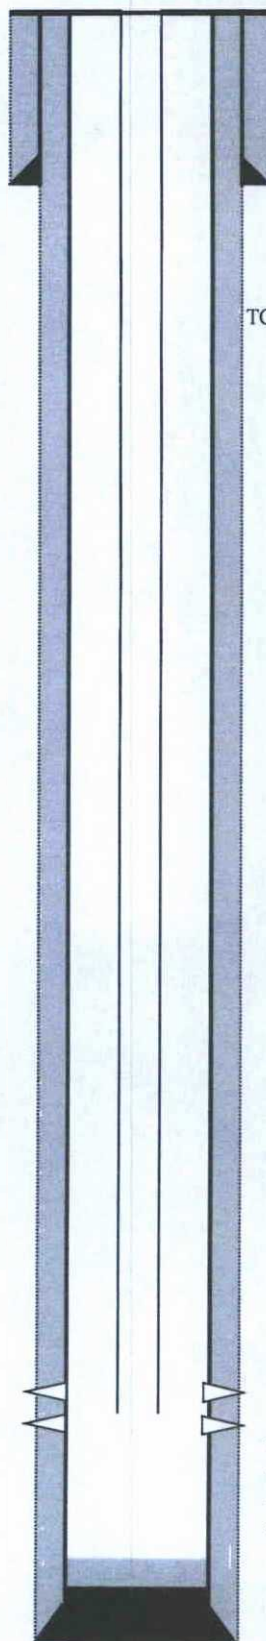

TOC: surf

Surface Casing Data

8 5/8" 24# Csg @ 356'
w/ 250 sx TOC @ surf (circ.)

TOC: surf

OIL CONS. DIV DIST. 3
DEC 18 2015

Tubing Details

2 3/8" TUBING
X Nipple
2.375" J55 4.7# PUP joint w/ Notched collar

Length

5924.99
1
4

DV @ 4108'

Perforation Data

5836' - 5952'
(1) (5913-5952): water/ 2# gel, 35,000 20/40, 15,000 10/20
breakdown pressure = 1600psi, Preat = 2914 psi, 51.7 bpm injection
(2) (5836-5856) : water/gel 2#/, 15,000 20/40, 5,000 10/20
Pbreakdown = 3600psi, Preat=3462 psi, 27.7 bpm injection

Production Casing Data

Hole Size: 6 1/4"
4 1/2" @ 6015' w/ 353 sx

PBTD: 6067'
TD: 6015'