

30-045-11018

DATA SHEET FOR DEEP GROUND BED CATHODIC PROTECTION WELLS
NORTHWESTERN NEW MEXICO

Operator Meridian Oil Inc. Location: Unit M Sec. 04 Twp 31 Rng 12

Name of Well/Wells or Pipeline Serviced _____

Newberry #7

Elevation 6030 Completion Date 4-4-93 Total Depth 417 Land Type F

Casing Strings, Sizes, Types & Depths 3/16 SET 99' OF 8" PVC CASING.

NO GAS, WATER, OR BOULDERS WERE ENCOUNTERED DURING CASING.

If Casing Strings are cemented, show amounts & types used Cemented

WITH 19 SACKS.

If Cement or Bentonite Plugs have been placed, show depths & amounts used

No plugs

Depths & thickness of water zones with description of water: Fresh, Clear,
Salty, Sulphur, Etc. 140' and was clear.

Depths gas encountered: No gas

Ground bed depth with type & amount of coke breeze used: 417' with
61 (100 lb) sacks of Lonsco S.W.

Depths anodes placed: 41' at 380 and 415 was at 170'

Depths vent pipes placed: Bottom to Surface

Vent pipe perforations: up to 140'

Remarks: _____

RECEIVED

JAN 31 1994

OIL CON. DIV.
DIST. 3

If any of the above data is unavailable, please indicate so. Copies of all logs, including Drillers Log, Water Analyses & Well Bore Schematics should be submitted when available. Unplugged abandoned wells are to be included.

Land Type may be shown: F-Federal; I-Indian; S-State; P-Fee.
If Federal or Indian, add Lease Number.

API WATER ANALYSIS REPORT FORM

Laboratory No. 25-930417-30

Company MERIDIAN OIL		Sample No.		Date Sampled 4-4-98
Field 235162	Legal Description N4-31-12	County or Parish S.T.	State NM	
Lease or Unit	Well Deakberry #7	Depth	Formation M.V.	Water, B/D
Type of Water (Produced, Supply, etc.)		Sampling Point G. Bed	Sampled By R. Smith	

DISSOLVED SOLIDS

CATIONS

	mg/l	me/l
Sodium, Na (calc.)	4000	170
Calcium, Ca	400	20.0
Magnesium, Mg	10	0.8
Barium, Ba		

OTHER PROPERTIES

pH	7.30
Specific Gravity, 60/60 F.	1.0114
Resistivity (ohm-meters) 34 F.	0.6

Total Dissolved Solids (calc.)

11,900


ANIONS

Chloride, Cl	5140	145
Sulfate, SO_4	2300	48
Carbonate, CO_3		
Bicarbonate, HCO_3	40	0.6

Iron, Fe (total)
Sulfide, as H_2S

REMARKS & RECOMMENDATIONS:

ATTN: B. Donahue

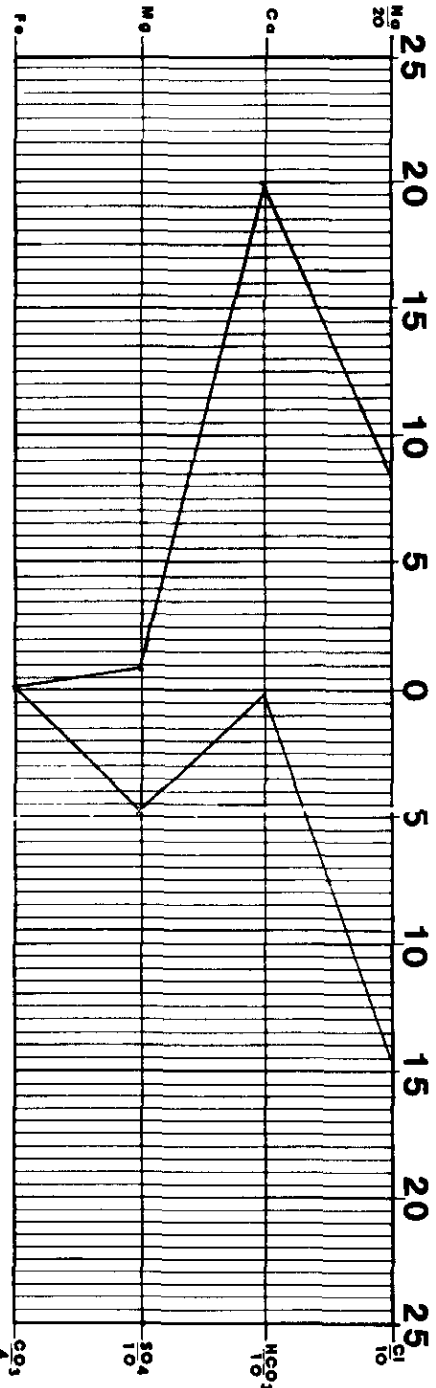

Date Received Apr 17th, 1993	Preserved	Date Analyzed May 6, 1993	Analyzed By R.H.
--	-----------	-------------------------------------	----------------------------



TECH, Inc.
333 East Main
Farmington
New Mexico
87401
505/327-3311