

30-045-237410

DATA SHEET FOR DEEP GROUND BED CATHODIC PROTECTION WELLS
NORTHWESTERN NEW MEXICO

Operator Meridian Oil Inc. Location: Unit F Sec. 17 Twp 31 Rng 12

Name of Well/Wells or Pipeline Serviced _____

Newberry #13A

Elevation 5956 Completion Date 4-3-93 Total Depth 403 Land Type F

Casing Strings, Sizes, Types & Depths 3/16 Set 98' of 8" PVC Casing.

NO GAS, WATER, OR BOULDERS WERE ENCOUNTERED DURING CASING.

If Casing Strings are cemented, show amounts & types used Cemented

WITH 31 SACKS.

If Cement or Bentonite Plugs have been placed, show depths & amounts used

no plugs

Depths & thickness of water zones with description of water: Fresh, Clear,

Salty, Sulphur, Etc. 180' and was clear.

Depths gas encountered: no gas

Ground bed depth with type & amount of coke breeze used: 403' with

58 (100 lb) sacks of Loresco SW

Depths anodes placed: #1 is at 345 and #15 is at 180'

Depths vent pipes placed: Both. to surface

Vent pipe perforations: up to 160'

Remarks: _____

RECEIVED

JAN 31 1994

OIL CON. DIV.
DIST. 3

If any of the above data is unavailable, please indicate so. Copies of all logs, including Drillers Log, Water Analyses & Well Bore Schematics should be submitted when available. Unplugged abandoned wells are to be included.

Land Type may be shown: F-Federal; I-Indian; S-State; P-Fee.

If Federal or Indian, add Lease Number.

API WATER ANALYSIS REPORT FORM

Laboratory No. 25-930473-3C

Company MERIDIAN OIL		Sample No.		Date Sampled 4-2-93	
Field 23541C3	Legal Description F17 - 31-12	County or Parish S.T.		State NM	
Lease or Unit	Well Deverdy #13A	Depth	Formation Mesa Verde	Water, B/D	
Type of Water (Produced, Supply, etc.)		Sampling Point G. Bed	Sampled By R. Smith		

DISSOLVED SOLIDS

CATIONS

	mg/l	me/l
Sodium, Na (calc.)	2600	110
Calcium, Ca	640	32.0
Magnesium, Mg	5	0.4
Barium, Ba		

OTHER PROPERTIES

pH	7.65
Specific Gravity, 60/60 F.	1.0117
Resistivity (ohm-meters)	74 F.

ANIONS

Chloride, Cl	4430	125
Sulfate, SO_4	930	20
Carbonate, CO_3		
Bicarbonate, HCO_3	20	0.4


Total Dissolved Solids (calc.)

8,700

Iron, Fe (total)
Sulfide, as H_2S

REMARKS & RECOMMENDATIONS:

F17A: B. Deverdy

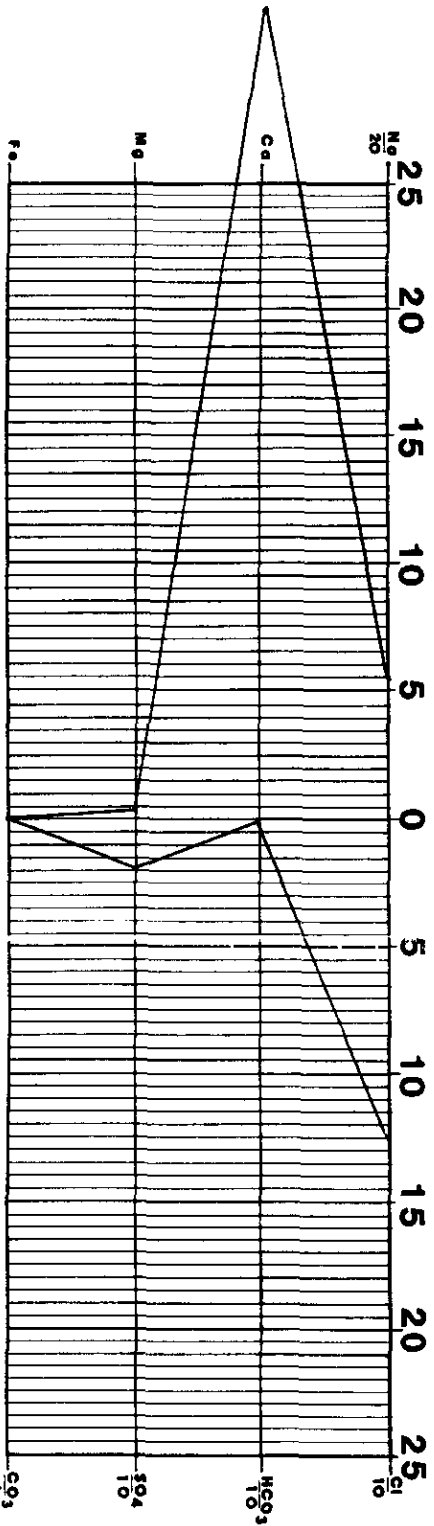

Date Received Apr 17th, 1993	Preserved	Date Analyzed May 1, 1993	Analyzed By R.H.
--	-----------	-------------------------------------	----------------------------



TECH, Inc.
333 East Main
Farmington
New Mexico
87401
505/327-3311