

87- 30-039-0774
468- 30-039-24438

4362

DATA SHEET FOR DEEP GROUND BED CATHODIC PROTECTION WELLS
NORTHWESTERN NEW MEXICO
(Submit 3 copies to OCD Aztec Office)

Operator MERIDIAN OIL Location: Unit SW Sec. 36 Twp 30 Rng 7

Name of Well/Wells or Pipeline Serviced SAN JUAN 30-6 UNIT #87, #468

cps 141w

Elevation 6862' Completion Date 8/8/66 Total Depth 360' Land Type* N/A

Casing, Sizes, Types & Depths N/A

If Casing is cemented, show amounts & types used N/A

If Cement or Bentonite Plugs have been placed, show depths & amounts used
N/A

Depths & thickness of water zones with description of water when possible:

Fresh, Clear, Salty, Sulphur, Etc. N/A

RECEIVED

MAY 31 1991

Depths gas encountered: N/A

OIL CON. DIV.
DIST. 3

Type & amount of coke breeze used: 7500 lbs.

Depths anodes placed: 290', 284', 250', 215', 209', 203', 197', 191', 185', 179'

Depths vent pipes placed: 290' OF 3/4" HOSE

Vent pipe perforations: N/A

Remarks: gb #2 DRILLED FIRST HOLE TO 400' & ABANDONED HOLE DUE TO CAVE IN.

If any of the above data is unavailable, please indicate so. Copies of all logs, including Drillers Log, Water Analyses & Well Bore Schematics should be submitted when available. Unplugged abandoned wells are to be included.

*Land Type may be shown: F-Federal; I-Indian; S-State; P-Fee.
If Federal or Indian, add Lease Number.

CATHODIC PROTECTION CONSTRUCTION REPORT

DAILY LOG

330' #16 Drag
30' #16 Drag
400' #54897 6" Rock

Date 8-8-66

Well Name SAN JUAN 30-6 #87 (Was Pueblo St. No. 1)			CPS No. 141 W		
Location SW 36-30-7			Work Order No. 189-90362-50-20		
Anode Hole Depth 360	Total Drilling Rig Time 72 1/2 Hrs	Type & Size Bit Used 43080 = 80'	No. Sacks Mud Used 10		
No. Sacks Lost Circulation Mat'l Used 0	Anode Depth				
	#1 290	#2 284	#3 256	#4 215	#5 209
Total Lbs. Coke Used 7500	Anode Output (Volts)				
	#1 3.5	#2 1.7	#3 1.7	#4 3.0	#5 4.0
Total Circuit Resistance			No. Ft. Surface Cable Conduit		
Volts 11.0	Amps 11.0	Ohms 1.0	183 Surface 260.3 Anodes = 2786		
				7 1.97	8 1.91
				9 1.85	10 1.79
				7 5.6	8 4.8
				9 2.7	10 2.7

Drilling Log (Attach Hereto). ☐


Remarks: 3/4" Hose to No. 2 Anode

20 lbs Phosphate to Hole While Coking
175 lbs Calcium Chloride to Hole While Coking
Drilled 400' & Abandoned Hole Due to Cave in.
No. 2 Hole Caved To 290'

All Construction Completed

Amela
(Signature)

GROUND BED LAYOUT SKETCH

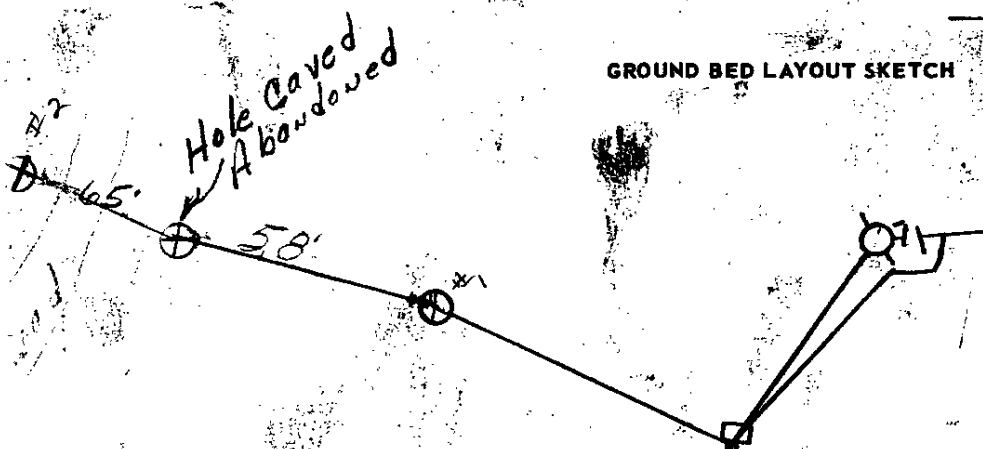

WELL #2

DAILY DRILLING REPORT

LEASE		WELL NO. 141W		CONTRACTOR H.E. WILSON		RIG NO.		REPORT NO.		DATE 8-10-66		19	
MORNING				DAYLIGHT				EVENING					
Driller		Total Men In Crew		Driller		Total Men In Crew		Driller		Total Men In Crew		R.P.M.	
FROM	TO	FORMATION	WT-BIT	FROM	TO	FORMATION	WT-BIT	FROM	TO	FORMATION	WT-BIT	FROM	TO
0'	30'	SAND											
30'	160'	SAND & SHALE (MET.)											
160'	260'	SHALE											
260'	360'	SAND & SHALE											
BIT NO. 43080		NO. DC 280		NO. DC 140		NO. DC 360		NO. DC 140		NO. DC 360		NO. DC 140	
SERIAL NO. 778		STANDS		STANDS		STANDS		STANDS		STANDS		STANDS	
SIZE 7 7/8		SINGLES		SINGLES		SINGLES		SINGLES		SINGLES		SINGLES	
TYPE RETP		DOWN ON KELLY		DOWN ON KELLY		DOWN ON KELLY		DOWN ON KELLY		DOWN ON KELLY		DOWN ON KELLY	
MAKE		TOTAL DEPTH		TOTAL DEPTH		TOTAL DEPTH		TOTAL DEPTH		TOTAL DEPTH		TOTAL DEPTH	
MUD RECORD		MUD, ADDITIVES USED AND RECEIVED		MUD RECORD		MUD, ADDITIVES USED AND RECEIVED		MUD RECORD		MUD, ADDITIVES USED AND RECEIVED		MUD, ADDITIVES USED AND RECEIVED	
Time	Wt.	Vis.	Time	Wt.	Vis.	Time	Wt.	Vis.	Time	Wt.	Vis.	Time	Wt.
8-10-66			8-10-66			8-10-66			8-10-66			8-10-66	
8-11-66			8-11-66			8-11-66			8-11-66			8-11-66	
8-12-66			8-12-66			8-12-66			8-12-66			8-12-66	
TIME BREAKDOWN		TIME BREAKDOWN		TIME BREAKDOWN		TIME BREAKDOWN		TIME BREAKDOWN		TIME BREAKDOWN		TIME BREAKDOWN	
FROM	TO	FROM	TO	FROM	TO	FROM	TO	FROM	TO	FROM	TO	FROM	TO
REMARKS		REMARKS		REMARKS		REMARKS		REMARKS		REMARKS		REMARKS	
8-10-66. LEFT WARD AT 6:00 ARRIVED RIG 7:45 WASHED HOLE OUT GAVE IN IN HOLE MOVED TO NEW HOLE DR. 4:00 PM 8:10 TO 180' WITH 7 7/8 BIT LEFT RIG AT 3:30		8-11-66. LEFT WARD AT 6:00 ARRIVED RIG 7:30, DRILLED FROM 180' TO 280' WITH 7 7/8 BIT. RIG AT 3:30, NO BIT.		8-12-66. LEFT WARD AT 6:00 ARRIVED RIG AT 7:30, DRILLED FROM 280' TO 360' WASHED HOLE DOWN LEFT LOC. AT 3:30.									

SIGNED: Toolpusher

[Signature]