

District I
1625 N. French Dr., Hobbs, NM 88240
District II
1301 W. Grand Avenue, Artesia, NM 88210
District III
1000 Rio Brazos Road, Aztec, NM 87410
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy Minerals and Natural Resources

Oil Conservation Division
1220 South St. Francis Dr.
Santa Fe, NM 87505

Form C-144
June 1, 2004
For drilling and production facilities, submit to appropriate NMOCD District Office.
For downstream facilities, submit to Santa Fe office

Pit or Below-Grade Tank Registration or Closure

RCVD APR16'07

Is pit or below-grade tank covered by a "general plan"? Yes ☐ No ☒

Type of action: Registration of a pit or below-grade tank ☐ Closure of a pit or below-grade tank ☒ **OIL CONS. DIV.**

Operator: <u>Williams Production Co., LLC</u> Telephone: <u>505-634-4219</u> e-mail address: <u>myke.lane@williams.com</u> DIST. 3		
Address: <u>POB 640, Aztec, NM 87410</u>		
Facility or well name: <u>Rosa 162A</u> API #: <u>30-039-26122</u> U/L or Qtr/Qtr <u>J</u> Sec <u>30</u> T <u>31N</u> R <u>05W</u>		
County: <u>Rio Arriba</u> Latitude _____ Longitude _____ NAD: 1927 ☐ 1983 ☒		
Surface Owner: Federal ☒ State ☐ Private ☐ Indian ☐		
Pit Type: Drilling ☐ Production ☒ Disposal ☐ Workover ☐ Emergency ☐ Lined ☐ Unlined ☐ Liner type: Synthetic ☐ Thickness _____ mil Clay ☐ Pit Volume _____ bbl	Below-grade tank Volume: <u>120</u> bbl Type of fluid: <u>Produced Water</u> Construction material: <u>Fiberglass with Plastic Liner</u> Double-walled, with leak detection? Yes ☒ If not, explain why not. _____	
Depth to ground water (vertical distance from bottom of pit to seasonal high water elevation of ground water.)	Less than 50 feet 50 feet or more, but less than 100 feet ✓ 100 feet or more	(20 points) (10 points) ✓ (0 points)
Wellhead protection area: (Less than 200 feet from a private domestic water source, or less than 1000 feet from all other water sources.)	Yes ✓ No	(20 points) ✓ (0 points)
Distance to surface water: (horizontal distance to all wetlands, playas, irrigation canals, ditches, and perennial and ephemeral watercourses.)	Less than 200 feet ✓ 200 ft or more, but less than 1000 feet 1000 feet or more	(20 points) ✓ (10 points) (0 points)
Ranking Score (Total Points)		10

If this is a pit closure: (1) Attach a diagram of the facility showing the pit's relationship to other equipment and tanks. (2) Indicate disposal location: (check the onsite box if you are burying in place) onsite ☒ offsite ☐ If offsite, name of facility _____. (3) Attach a general description of remedial action taken including remediation start date and end date. (4) Groundwater encountered: No ☒ Yes ☐ If yes, show depth below ground surface _____ ft. and attach sample results. (5) Attach soil sample results and a diagram of sample locations and excavations.

Additional Comments:

BGT failed. Replace Fiberglass tank with sub-grade steel tank. Composite soil sample collected following removal of tank and liner 3/19/07.

See attached site diagram and soil sample results.

I hereby certify that the information above is true and complete to the best of my knowledge and belief. I further certify that the above-described pit or below-grade tank has been/will be constructed or closed according to NMOCD guidelines ☒, a general permit ☐, or an (attached) alternative OCD-approved plan ☐.

Date: 4/5/07


Printed Name/Title Michael K. Lane/EH&S Specialist

Signature 

Your certification and NMOCD approval of this application/closure does not relieve the operator of liability should the contents of the pit or tank contaminate ground water or otherwise endanger public health or the environment. Nor does it relieve the operator of its responsibility for compliance with any other federal, state, or local laws and/or regulations.

Approval: **DEPUTY OIL & GAS INSPECTOR, DIST. 3**

Printed Name/Title _____

Signature 

Date: APR 16 2007

Date: 3/13/07Inspector: SIGANA

Location:

Rosa 162AUnit Letter: J Sec. 30 Twn. 31N Rng 5WLat: — Long: —Reference: Wellhead Footage: 60Direction: N or S 10° Degrees E or W

Original Pit Construction (Circle):

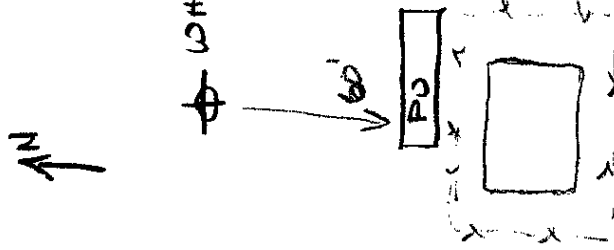
Replacement Pit (Circle):

Fiberglass / Steel single-wall
SGT / Double-Btm Steel / None

Comments (Note if samples taken and if contamination is suspected):

COMPOSITE SOIL SAMPLE TAKEN ONCE
PIT REMOVED. RESULTS BY SGT. NO
CONTAMINATION SUSPECTED.

Site Diagram (Sketch former pit location relative to wellhead and any other surface equipment. Note North direction):



Sample ID

Description

Field Reading

1

2

3

4

5

6

7

8

ENVIROTECH LABS

PRACTICAL SOLUTIONS FOR A BETTER TOMORROW

EPA METHOD 8015 Modified Nonhalogenated Volatile Organics Total Petroleum Hydrocarbons

Client:	Williams Production	Project #:	04108-003-2298
Sample ID:	Replace Pit	Date Reported:	03-21-07
Laboratory Number:	40545	Date Sampled:	03-19-07
Chain of Custody No:	2298	Date Received:	03-20-07
Sample Matrix:	Soil	Date Extracted:	03-20-07
Preservative:	Cool	Date Analyzed:	03-21-07
Condition:	Cool and Intact	Analysis Requested:	8015 TPH


Parameter	Concentration (mg/Kg)	Det. Limit (mg/Kg)
Gasoline Range (C5 - C10)	ND	0.2
Diesel Range (C10 - C28)	ND	0.1
Total Petroleum Hydrocarbons	ND	0.2

ND - Parameter not detected at the stated detection limit.

References: Method 8015B, Nonhalogenated Volatile Organics, Test Methods for Evaluating Solid Waste, SW-846, USEPA, December 1996.

Comments: **Rosa 162A**


Analyst


Review

ENVIROTECH LABS

PRACTICAL SOLUTIONS FOR A BETTER TOMORROW

EPA METHOD 8021 AROMATIC VOLATILE ORGANICS

Client:	Williams Production	Project #:	04108-003-2298
Sample ID:	Replace Pit	Date Reported:	03-21-07
Laboratory Number:	40545	Date Sampled:	03-19-07
Chain of Custody:	2298	Date Received:	03-20-07
Sample Matrix:	Soil	Date Analyzed:	03-21-07
Preservative:	Cool	Date Extracted:	03-20-07
Condition:	Cool & Intact	Analysis Requested:	BTEX

Parameter	Concentration (ug/Kg)	Det. Limit (ug/Kg)
Benzene	ND	1.8
Toluene	ND	1.7
Ethylbenzene	2.9	1.5
p,m-Xylene	30.8	2.2
o-Xylene	8.4	1.0
Total BTEX	42.1	


ND - Parameter not detected at the stated detection limit.


Surrogate Recoveries:	Parameter	Percent Recovery
	Fluorobenzene	97.0 %
	1,4-difluorobenzene	97.0 %
	Bromochlorobenzene	97.0 %

References: Method 5030B, Purge-and-Trap, Test Methods for Evaluating Solid Waste, SW-846, USEPA, December 1996.

Method 8021B, Aromatic Volatile Organics, Test Methods for Evaluating Solid Waste, SW-846, USEPA, December 1996.

Comments: Rosa 162A


Analyst


Review

2298

san juan reproduction 578-129