

30-015-10073

4282

DATA SHEET FOR DEEP GROUND BED CATHODIC PROTECTION WELLS
NORTHWESTERN NEW MEXICO

(Submit 3 copies to OCD Aztec Office)

Operator MERIDIAN OIL Location: Unit SW Sec. 32 Twp 31 Rng 9

Name of Well/Wells or Pipeline Serviced WALKER #2

cps 388w

Elevation 6348' Completion Date 6/10/63 Total Depth 260' Land Type* N/A

Casing, Sizes, Types & Depths N/A

If Casing is cemented, show amounts & types used N/A

If Cement or Bentonite Plugs have been placed, show depths & amounts used
N/A

Depths & thickness of water zones with description of water when possible:
Fresh, Clear, Salty, Sulphur, Etc. N/A

Depths gas encountered: N/A

Type & amount of coke breeze used: 2100 lbs.

Depths anodes placed: 215', 109', 203', 197', 191'

Depths vent pipes placed: N/A

Vent pipe perforations: N/A

Remarks: qb #1

RECEIVED
MAY 31 1991
OIL CON. DIV.
DIST. 3

If any of the above data is unavailable, please indicate so. Copies of all logs, including Drillers Log, Water Analyses & Well Bore Schematics should be submitted when available. Unplugged abandoned wells are to be included.

*Land Type may be shown: F-Federal; I-Indian; S-State; P-Fee.
If Federal or Indian, add Lease Number.

WELL CASING
CATHODIC PROTECTION CONSTRUCTION REPORT
DAILY LOG

DATE 6-10-63

WELL NAME Walker No. 2

CPS NO. ~~388~~ 388-W

LOCATION SW Sec. 32 T31 N R 9W

WORK ORDER NUMBER 184-40542-50-02

ANODE HOLE DEPTH 260

TOTAL DRILLING RIG TIME 10 Hrs.

DRILLING TIME FOR RECTIFIER POLE HOLE 0

TYPE AND SIZE BIT USED 6 1/4 Rock WM 3496 6760
85 175

NUMBER SACKS MUD USED 3

NUMBER SACKS LOST CIRCULATION MAT'L USED 0

ANODE DEPTHS #1 215, #2 289, #3 203, #4 197 #5 191

TOTAL LBS. COKE USED 2100 21 Sacks

ANODE OUTPUTS 12.2 VOLTS, #1 3.2, #2 3.1, #3 3.1, #4 3.2 4.2

TOTAL CIRCUIT RESISTANCE: VOLTS 11.7 AMPERES 7.8 OHMS 1.5


NUMBER FEET SURFACE CABLE ~~CONDUIT~~ 296

DRILLING LOG (ATTACH HERETO).

FORMATION LOG (ATTACH HERETO).

REMARKS: Static g/s .76R 600' 5

Good All Rectifier 28V 12A Ser. # 62C6034

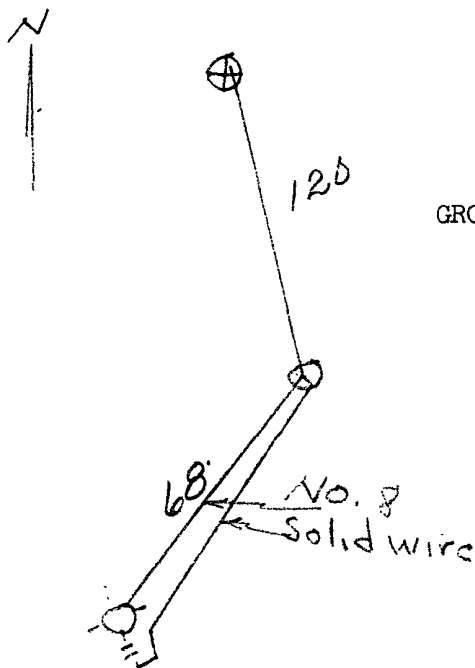

ALL CONSTRUCTION COMPLETED

Dorrels
SIGNATURE

GROUND BED LAYOUT SKETCH

ORIGINAL & 1 COPY
ALL REPORTS

1391'

DATE June 28/10 1963
EVENING

EVENING

Driller: <u>Todd Menthin Crew</u>					Driller: <u>Todd Menthin Crew</u>					Driller: <u>Todd Menthin Crew</u>				
FROM	TO	FORMATION	WT. BLT.	R.P.M.	FROM	TO	FORMATION	WT. BLT.	R.P.M.	FROM	TO	FORMATION	WT. BLT.	R.P.M.
0	28	ch4	100		122	102	ch4	100		230	245	ch4	100	
28	50	600	100		122	102	ch4	100		245	260	ch4	100	
50	65	600	100		122	102	ch4	100		260	260	ch4	100	
65	99	600	100		122	102	ch4	100		260	260	ch4	100	

NO. DC	SIZE	LENG.	NO. DC	SIZE	LENG.	NO. DC	SIZE	LENG.
BIT NO.	NO. DC	SIZE	LENG.	BIT NO.	NO. DC	SIZE	LENG.	BIT NO.
SERIAL NO.	STANDS	SERIAL NO.	STANDS	SERIAL NO.	STANDS	SERIAL NO.	STANDS	SERIAL NO.
SIZE	SINGLES	SIZE	SINGLES	SIZE	SINGLES	SIZE	SINGLES	SIZE
TYPE	DOWN ON KELLY	TYPE	DOWN ON KELLY	TYPE	DOWN ON KELLY	TYPE	DOWN ON KELLY	TYPE
MAKE	TOTAL DEPTH	MAKE	TOTAL DEPTH	MAKE	TOTAL DEPTH	MAKE	TOTAL DEPTH	MAKE
WILHELM	260							

[illegible][illegible]

REMARKS

MARK	REMARKS	REMARKS
June 8 - moved 2:30 PM	Drilled 250' used 15 gal mud	Drilled 25:00
June 9 - off		
June 10 - left about 6:00	arrived at 8:10 Drilled 175'	finished at 2:30 used 2 mud

Company Supervisor

W. H. Kennedy