

5178

30-039-07276

DATA SHEET FOR DEEP GROUND BED CATHODIC PROTECTION WELLS
NORTHWESTERN NEW MEXICO
(Submit 3 copies to OCD Aztec Office)

Operator MERIDIAN OIL Location: Unit NE Sec. 32 Twp 28 Rng 5

Name of Well/Wells or Pipeline Serviced SAN JUAN 28-5 UNIT #41

cps 748w

Elevation 6547' Completion Date 4/19/66 Total Depth 240' Land Type* N/A

Casing, Sizes, Types & Depths N/A

If Casing is cemented, show amounts & types used N/A

If Cement or Bentonite Plugs have been placed, show depths & amounts used
N/A

Depths & thickness of water zones with description of water when possible:
Fresh, Clear, Salty, Sulphur, Etc. WET 35'-65'

Depths gas encountered: N/A

Type & amount of coke breeze used: 3875'

Depths anodes placed: 215', 209', 203', 197', 191', 168', 162', 156'

Depths vent pipes placed: 215' OF 3/4" PLASTIC HOSE

Vent pipe perforations: 215'

Remarks: gb #1

RECEIVED

MAY 31 1991
MAY 31 1991

OIL CON. DIV.
DIST. 3

If any of the above data is unavailable, please indicate so. Copies of all logs, including Drillers Log, Water Analyses & Well Bore Schematics should be submitted when available. Unplugged abandoned wells are to be included.

*Land Type may be shown: F-Federal; I-Indian; S-State; P-Fee.
If Federal or Indian, add Lease Number.

WELL CASING
CATHODIC PROTECTION CONSTRUCTION REPORT
DAILY LOG

65' #5 Drog 4³/₄"

Date 4-19-66

Well Name 514. 28-5 #41			CPS No. 740W		
Location NE 32-28-5			Work Order No. 184-53964-50-20		
Anode Hole Depth 240	Total Drilling Rig Time 16 Hrs.	Type & Size Bit Used 7/8-13227 = 240'		No. Sacks Mud Used 0	
No. Sacks Lost Circulation Mat'l Used 0	Anode Depth				
	#1 215	#2 209	#3 203	#4 197	#5 191
Total Lbs. Coke Used 3875	Anode Output (Volts)				
	#1 4.8	#2 5.1	#3 4.8	#4 4.3	#5 3.8
Total Circuit Resistance	No. Ft. Surface Cable Conduit				
Volts 11.4	Amps 11.8	Ohms 0.96	1741 on Anodes		

Drilling Log (Attach Hereto). ☐

7	162	8	156
7	5.2	8	5.0

Remarks: $R_{\frac{1}{2}} 600' E = .79$

3/4" Plastic Hose to No. 1 Anode - Perforated opposite Anodes
10 lbs Chemical to G.B.

PEM Rectifier 40-12-2Neg. Ser. # 637345


All Construction Completed

Barrels
(Signature)

GROUND BED LAYOUT SKETCH

Trunk "6"

1741'
375'
2116' TOTAL #8 WIRE

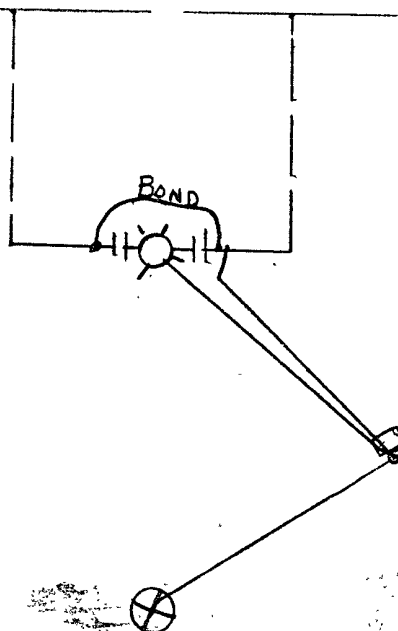

DRILLING DEPT. ARTMENT

DAILY DRILLING REPORT

387L

[illegible]

SIGNED: Toolpusher:

Company "Supervisor":

Forrelds