

4810

30-039-07540

DATA SHEET FOR DEEP GROUND BED CATHODIC PROTECTION WELLS
NORTHWESTERN NEW MEXICO
(Submit 3 copies to OCD Aztec Office)

Operator MERIDIAN OIL Location: Unit NE Sec. 29 Twp 29 Rng 7

Name of Well/Wells or Pipeline Serviced SAN JUAN 29-7 UNIT #42

cps 121w

Elevation 6383' Completion Date 12/26/62 Total Depth 95' Land Type* N/A

Casing, Sizes, Types & Depths N/A

If Casing is cemented, show amounts & types used N/A

If Cement or Bentonite Plugs have been placed, show depths & amounts used
N/A

Depths & thickness of water zones with description of water when possible:
Fresh, Clear, Salty, Sulphur, Etc. N/A

Depths gas encountered: N/A

Type & amount of coke breeze used: 680 lbs.

Depths anodes placed: 82', 176', 70', 64'

Depths vent pipes placed: N/A

Vent pipe perforations: N/A

Remarks: gb #1

RECEIVED
MAY 31 1991
OIL CON. DIV.
\DIST. 3

If any of the above data is unavailable, please indicate so. Copies of all logs, including Drillers Log, Water Analyses & Well Bore Schematics should be submitted when available. Unplugged abandoned wells are to be included.

*Land Type may be shown: F-Federal; I-Indian; S-State; P-Fee.
If Federal or Indian, add Lease Number.

WELL CASING
CATHODIC PROTECTION CONSTRUCTION REPORT
DAILY LOG

DATE 12-26-62

WELL NAME San Juan 29-7 # 42 CPS NO. 121W

LOCATION 29-29N - 7W

WORK ORDER NUMBER 184-40542-50-02

ANODE HOLE DEPTH 95'

TOTAL DRILLING RIG TIME 8125

DRILLING TIME FOR RECTIFIER POLE HOLE 0

TYPE AND SIZE BIT USED _____

NUMBER SACKS MUD USED 0

NUMBER SACKS LOST CIRCULATION MAT'L USED 0

ANODE DEPTHS #1 82', #2 76', #3 70', #4 64'

TOTAL LBS. COKE USED 680 lbs

ANODE OUTPUTS 12 VOLTS, #1 3.2, #2 4.4, #3 4.4, #4 4.0

TOTAL CIRCUIT RESISTANCE: VOLTS 11.6 AMPERES 8.6 OHMS 1.352

NUMBER FEET SURFACE CABLE CONDUIT 285'

DRILLING LOG (ATTACH HERETO).


FORMATION LOG (ATTACH HERETO).

REMARKS: Static C/S . 71 R 600 E

ALL CONSTRUCTION COMPLETED

E. Paulk
SIGNATURE

GROUND BED LAYOUT SKETCH

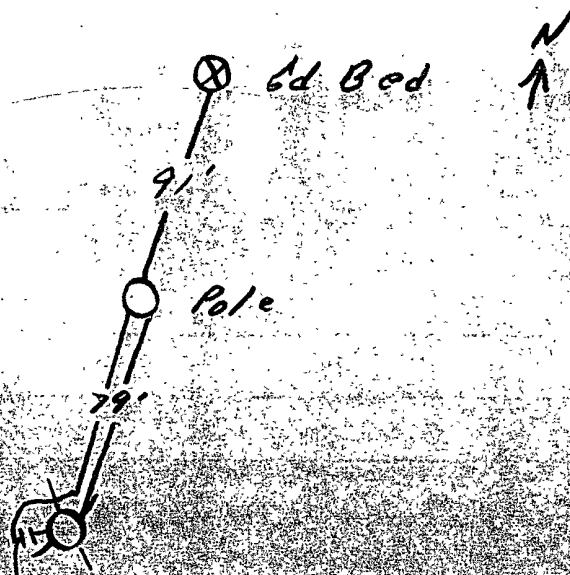

ORIGINAL & 1 COPY
ALL REPORTS

577'

