

30-045-09480

5169

DATA SHEET FOR DEEP GROUND BED CATHODIC PROTECTION WELLS
NORTHWESTERN NEW MEXICO
(Submit 3 copies to OCD Aztec Office)

Operator MERIDIAN OIL Location: Unit SW Sec. 18 Twp 30 Rng 10

Name of Well/Wells or Pipeline Serviced SCHUMACHER #11

cps 783w

Elevation 6272' Completion Date 8/31/67 Total Depth 360' Land Type* N/A

Casing, Sizes, Types & Depths N/A

If Casing is cemented, show amounts & types used N/A

If Cement or Bentonite Plugs have been placed, show depths & amounts used

N/A

Depths & thickness of water zones with description on water when possible:

Fresh, Clear, Salty, Sulphur, Etc. 100'

RECEIVED

MAY 31 1991

OIL CON. DIV
DIST. ?

Depths gas encountered: N/A

Type & amount of coke breeze used: 6100 lbs.

Depths anodes placed: 334', 328', 322', 316', 286', 250', 244', 238', 232', 226', 220'
214

Depths vent pipes placed: 334' OF 3/4" HOSE

Vent pipe perforations: 334'

Remarks: gb #1

If any of the above data is unavailable, please indicate so. Copies of all logs, including Drillers Log, Water Analyses & Well Bore Schematics should be submitted when available. Unplugged abandoned wells are to be included.

*Land Type may be shown: F-Federal; I-Indian; S-State; P-Fee.
If Federal or Indian, add Lease Number.

WELL CASING
CATHODIC PROTECTION CONSTRUCTION REPORT
DAILY LOG

Date 8-31-67

Well Name: <i>Schumacher No. 11</i>			CPS No. <i>783 W</i>			
Location: <i>S.W. 18-30-10</i>			Work Order No. <i>184-54051-50-20</i>			
Anode Hole Depth <i>360</i>	Total Drilling Rig Time <i>27 1/2</i>	Type & Size Bit Used <i>7 7/8-89174-140-984280-220</i>		No. Sacks Mud Used <i>0</i>		
No. Sacks Lost Circulation Mat'l Used <i>0</i>	Anode Depth	#1 <i>334</i>	#2 <i>328</i>	#3 <i>322</i>	#4 <i>316</i>	#5 <i>286</i>
Total Lbs. Coke Used <i>6100</i>	Anode Output (Volts)	#1 <i>5.3</i>	#2 <i>5.8</i>	#3 <i>5.8</i>	#4 <i>5.6</i>	#5 <i>4.5</i>
Total Circuit Resistance Volts <i>11.0</i>	Amps <i>18.0</i>	Ohms <i>0.61</i>	No. Ft. Surface Cable Conduit <i>240 Surface 3450 ON Anodes = 3690</i>			
Drilling Log (Attach Hereto) ☐	7 <i>244</i>	8 <i>238</i>	9 <i>232</i>	10 <i>226</i>	11 <i>220</i>	12 <i>214</i>
Remarks:	7 <i>6.5</i>	8 <i>6.2</i>	9 <i>6.3</i>	10 <i>6.0</i>	11 <i>5.7</i>	12 <i>6.0</i>


R⁹s 600' W = 0.78

*3/4" Hose to No. 1 Anode Perforated All
15 lbs Barafos Circ. Thru. Hole*

All Construction Completed

Arrels
(Signature)

GROUND BED LAYOUT SKETCH

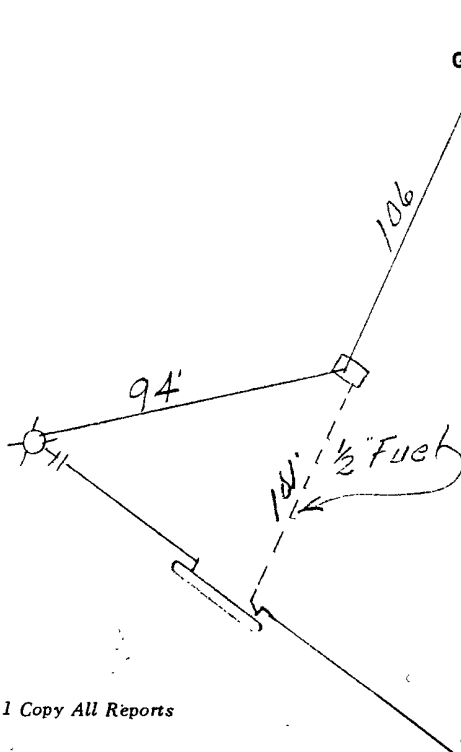

LEASE

WELL NO. 783M CONTRASTOROK

NO. 6

REPORT NO

DATE _____

10

MORNING

DAYLIGHT

EVENING

[illegible]

SIGNED: Tolpuushen

Company Supervisor

Amelia