

30-045-06951

DATA SHEET FOR DEEP GROUND BED CATHODIC PROTECTION WELLS
NORTHWESTERN NEW MEXICO
(Submit 3 copies to OCD Aztec Office)

Operator MERIDIAN OIL Location: Unit SW Sec. 32 Twp 28 Rng 8

Name of Well/Wells or Pipeline Serviced PHILLIPS #1

cps 547w

Elevation 6379' Completion Date 4/16/64 Total Depth 260' Land Type* N/A

Casing, Sizes, Types & Depths N/A

If Casing is cemented, show amounts & types used N/A

If Cement or Bentonite Plugs have been placed, show depths & amounts used
N/A

Depths & thickness of water zones with description of water when possible:
Fresh, Clear, Salty, Sulphur, Etc. N/A

Depths gas encountered: N/A

Type & amount of coke breeze used: 4125lbs.

Depths anodes placed: 175', 169', 163', 157', 151'

Depths vent pipes placed: N/A

Vent pipe perforations: N/A

Remarks: qb. #1

RECEIVED
MAY 31 1991
OIL CON. DIV.
DIST. 3

If any of the above data is unavailable, please indicate so. Copies of all logs, including Drillers Log, Water Analyses & Well Bore Schematics should be submitted when available. Unplugged abandoned wells are to be included.

*Land Type may be shown: F-Federal; I-Indian; S-State; P-Fee.
If Federal or Indian, add Lease Number.

WELL CASING
CATHODIC PROTECTION CONSTRUCTION REPORT
DAILY LOG

DATE 4-16-64

WELL NAME Phillips No. 1

CPS NO. 547-W

LOCATION SW 1/4 32-28-8

WORK ORDER NUMBER 53061

ANODE HOLE DEPTH 260

TOTAL DRILLING RIG TIME 17 Hrs.

DRILLING TIME FOR RECTIFIER POLE HOLE 0

TYPE AND SIZE BIT USED 7 7/8 - Security-Ser # 67744-X

NUMBER SACKS MUD USED 1

NUMBER SACKS LOST CIRCULATION MAT'L USED 0

ANODE DEPTHS #1 175, #2 169, #3 163, #4 157 5 151

TOTAL LBS. COKE USED 4125 (33 sacks)

ANODE OUTPUTS 12.7 VOLTS, #1 2.6, #2 3.9, #3 4.7, #4 5.0 5.3

TOTAL CIRCUIT RESISTANCE: VOLTS 12.2 AMPERES 7.4 OHMS 1.64

NUMBER FEET SURFACE CABLE ~~CONDUIT~~ 308

DRILLING LOG (ATTACH HERETO).

FORMATION LOG (ATTACH HERETO).


REMARKS: Static Gs. 80 R 600' NE

P.E.M. Rect. Ser. # 637255 - 28V12A

ALL CONSTRUCTION COMPLETED

Amels
SIGNATURE

GROUND BED LAYOUT SKETCH

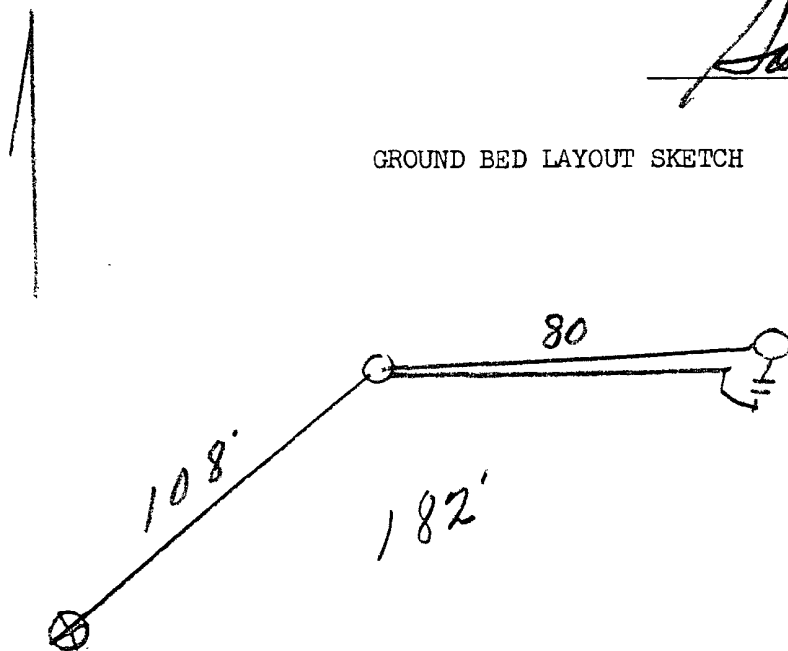

ORIGINAL & 1 COPY
ALL REPORTS

1163'

PLEASE Phillips

WELL NO.

CONTRACTOR

L.E. Wilson

RIG NO.

REPORT NO.

DATE _____

11-14 + 15 + 16 1964

MORNING

DAYLIGHT

EVENING

Driller						Total Men In Crew						Driller						Total Men In Crew						Driller						Total Men In Crew					
FROM		TO		FORMATION		WT-BIT		R.P.M.		FROM		TO		FORMATION		WT-BIT		R.P.M.		FROM		TO		FORMATION		WT-BIT		R.P.M.							
0	12			SC.						115	120			SGY SS						190	210			SAND											
12	85			SS.						120	163			SAND + SS						210	223			Sh											
85	95			Sh + SC.						163	177			Sh. + SS						223	232			SAND											
95	115			SAND						177	190			SC						232	260			Sh											

	NO. DC	SIZE	LENG.		NO. DC	SIZE	LENG.		NO. DC	SIZE	LENG.
BIT NO.	NO. DC	SIZE	LENG.	BIT NO.	NO. DC	SIZE	LENG.	BIT NO.	NO. DC	SIZE	LENG.
SERIAL NO. 67744-210 ST			STANDS	SERIAL NO.			STANDS	SERIAL NO.			STANDS
SIZE 74			SINGLES	SIZE			SINGLES	SIZE			SINGLES
TYPE K2PJ			DOWN ON KELLY	TYPE			DOWN ON KELLY	TYPE			DOWN ON KELLY
MAKE Security			TOTAL DEPTH 210'	MAKE			TOTAL DEPTH	MAKE			TOTAL DEPTH

MUD RECORD			MUD, ADDITIVES USED AND RECEIVED	MUD RECORD			MUD, ADDITIVES USED AND RECEIVED	MUD RECORD			MUD, ADDITIVES USED AND RECEIVED
Time	Wt.	Vis.		Time	Wt.	Vis.		Time	Wt.	Vis.	
			1 Mud								

[illegible]

REMARKS-

REMARKS -

REMARKS

4-14-64

Finished Last hole @ 3:30 PM.

Started hole @ 4:15 P.M. - Drilled from 0' to 40'

Left Field @ 5:00 P.M.

K-15-64

Left Yard @ 6:00 AM

Arrived Rig @ 7:45 AM - Drilled from 40 to 100'

Left Field @ 5:00 PM

4-16-64

Left Yard @ 1:00 AM

Arrived Rig @ 745 AM - Drilled 200 to 210

Finished note @ 1230 PM

SIGNED: Toolpusher

Company Supervisor