

#13 30-039-07450

#414 30-039-24961 4768

DATA SHEET FOR DEEP GROUND BED CATHODIC PROTECTION WELLS  
NORTHWESTERN NEW MEXICO  
(Submit 3 copies to OCD Aztec Office)

Operator MERIDIAN OIL Location: Unit SW Sec. 8 Twp 28 Rng 6

Name of Well/Wells or Pipeline Serviced SAN JUAN 28-6 UNIT #13, #414  
cps 634w

Elevation 6817' Completion Date 11/7/63 Total Depth 185' Land Type\* N/A

Casing, Sizes, Types & Depths N/A

If Casing is cemented, show amounts & types used N/A

If Cement or Bentonite Plugs have been placed, show depths & amounts used  
N/A

Depths & thickness of water zones with description of water when possible:  
Fresh, Clear, Salty, Sulphur, Etc. N/A

Depths gas encountered: N/A

Type & amount of coke breeze used: 1650 lbs.

Depths anodes placed: 155', 149', 143', 137', 131'

Depths vent pipes placed: N/A

Vent pipe perforations: N/A

Remarks: gb #1

RECEIVED  
MAY 31 1991  
OIL CON. DIV  
DIST. 3

If any of the above data is unavailable, please indicate so. Copies of all logs, including Drillers Log, Water Analyses & Well Bore Schematics should be submitted when available. Unplugged abandoned wells are to be included.

\*Land Type may be shown: F-Federal; I-Indian; S-State; P-Fee.  
If Federal or Indian, add Lease Number.

WELL CASING  
CATHODIC PROTECTION CONSTRUCTION REPORT  
DAILY LOG

Date 11-7-63

|                                                   |                                         |                                                    |                                |                                |                |
|---------------------------------------------------|-----------------------------------------|----------------------------------------------------|--------------------------------|--------------------------------|----------------|
| Well Name<br><u>SAN JUAN 28-6 Unit No. 13</u>     |                                         |                                                    | CPS No.<br><u>634 W</u>        |                                |                |
| Location<br><u>SW 8-28-6</u>                      |                                         |                                                    | Work Order No.<br><u>52519</u> |                                |                |
| Anode Hole Depth<br><u>185</u>                    | Total Drilling Rig Time<br><u>7 Hrs</u> | Type & Size Bit Used<br><u>6 1/4 Rock WM 5707X</u> |                                | No. Sacks Mud Used<br><u>2</u> |                |
| No. Sacks Lost Circulation Mat'l Used<br><u>1</u> | Anode Depth                             |                                                    |                                |                                |                |
|                                                   | # 1 <u>155</u>                          | # 2 <u>149</u>                                     | # 3 <u>143</u>                 | # 4 <u>137</u>                 | # 5 <u>131</u> |
| Total Lbs. Coke Used<br><u>1650 (55k)</u>         | Anode Output (Volts)                    |                                                    |                                |                                |                |
| <u>12.3</u> Volts                                 | # 1 <u>4.7</u>                          | # 2 <u>3.4</u>                                     | # 3 <u>2.8</u>                 | # 4 <u>3.4</u>                 | # 5 <u>4.4</u> |
| Total Circuit Resistance                          |                                         |                                                    | No. Ft. Surface Cable Conduit  |                                |                |
| Volts <u>11.8</u>                                 | Amps <u>8.4</u>                         | Ohms <u>1.40</u>                                   | <u>305</u>                     |                                |                |

Drilling Log (Attach Hereto): ☐

Remarks:

Static c/s. 66 R 600 NE


Installed PEM Rectifier 28V 12A  
Ser. 637199

All Construction Completed

Barrels

(Signature)

GROUND BED LAYOUT SKETCH

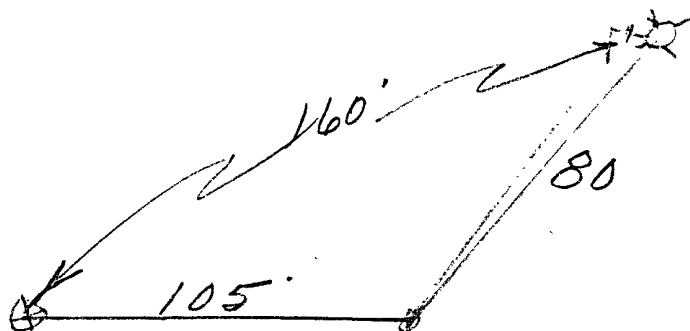

1100'  
8.9#



