

92 - 30-039-07735
425 - 30-039-24238

DATA SHEET FOR DEEP GROUND BED CATHODIC PROTECTION WELLS
NORTHWESTERN NEW MEXICO
(Submit 3 copies to OCD Aztec Office)

Operator MERIDIAN OIL Location: Unit NE Sec. 33 Twp 30 Rng 7

Name of Well/Wells or Pipeline Serviced SAN Juan 30-6 UNIT #92, #425

cps 285w

Elevation 6309 Completion Date 3/22/63 Total Depth 160' Land Type* N/A

Casing, Sizes, Types & Depths N/A

If Casing is cemented, show amounts & types used N/A

If Cement or Bentonite Plugs have been placed, show depths & amounts used
N/A

Depths & thickness of water zones with description of water when possible:
Fresh, Clear, Salty, Sulphur, Etc. N/A

Depths gas encountered: N/A


Type & amount of coke breeze used: 1190 lbs.

Depths anodes placed: 126', 120', 106', 100', 94'

Depths vent pipes placed: N/A

Vent pipe perforations: N/A

Remarks: qb #1

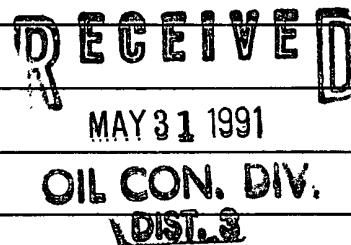

If any of the above data is unavailable, please indicate so. Copies of all logs, including Drillers Log, Water Analyses & Well Bore Schematics should be submitted when available. Unplugged abandoned wells are to be included.

*Land Type may be shown: F-Federal; I-Indian; S-State; P-Fee.
If Federal or Indian, add Lease Number.

WELL CASING
CATHODIC PROTECTION CONSTRUCTION REPORT
DAILY LOG

DATE 3-22-63

WELL NAME Whitley #2B 306#92 CPS NO. 285W

LOCATION 33-30N-7W

WORK ORDER NUMBER 184-40542-50-02

ANODE HOLE DEPTH 160'

TOTAL DRILLING RIG TIME 7 hrs

DRILLING TIME FOR RECTIFIER POLE HOLE 0

TYPE AND SIZE BIT USED _____

NUMBER SACKS MUD USED 0

NUMBER SACKS LOST CIRCULATION MAT'L USED 0

ANODE DEPTHS #1 126', #2 120', #3 106', #4 100' 5.94'

TOTAL LBS. COKE USED 1190 lbs

ANODE OUTPUTS 12' VOLTS, #1 3.0, #2 3.6, #3 3.4, #4 3.7 5.3.9

TOTAL CIRCUIT RESISTANCE: VOLTS 11.5 AMPERES 9 OHMS 1.28

NUMBER FEET SURFACE CABLE ~~CONDUCT~~ 325'

DRILLING LOG (ATTACH HERETO).


FORMATION LOG (ATTACH HERETO).

REMARKS: Static $\rho_s = .67 R$ 600' F

ALL CONSTRUCTION COMPLETED

E. Pauk
SIGNATURE

GROUND BED LAYOUT SKETCH

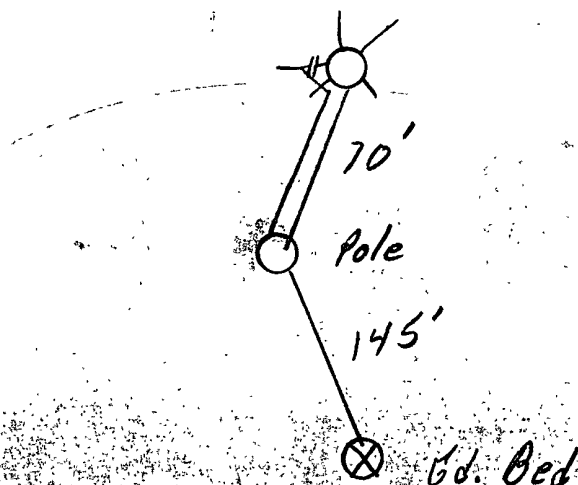

ORIGINAL & 1 COPY
ALL REPORTS

951

1965

EVENING

Driller										Total Man-In Crew										Driller										Total Man-In Crew									
FROM		TO		FORMATION		WT. BIT		R.P.M.		FROM		TO		FORMATION		WT. BIT		R.P.M.		FROM		TO		FORMATION		WT. BIT		R.P.M.											
0		92		SC. F.S.S.		8504																																	
92		116		SS		3491																																	
116		124		SS		"																																	
124		160		SS. 958. stringer		"																																	
REMARKS -										REMARKS -										REMARKS -																			
3-21-68. Drilled To 60'. 1 LOG										3-21-68. Drilled To 60'. 1 LOG										3-21-68. Drilled To 60'. 1 LOG																			
3-22-68. " " FROM 60' TO 160'										3-22-68. " " FROM 60' TO 160'										3-22-68. " " FROM 60' TO 160'																			